Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

Laboratory and Equipment

Test lab	Viso LabSpion - serial: 2007279764 sensor serial: 0690170290 - Test lab
Spectrometer Manufacturer and Model	LabSpion – Type C, horizontal
Measurement serial number	PH-GVA-2026.May.26-8898-VO
Measurement date	2026-05-26

Measurement Conditions

Tested c-planes	36 planes – 10.00°
Tested gamma resolution	1.00°
Input Power	128.9 W

Electrical Data

Input Power	128.9 W
Input Voltage	381.4 V DC
Input Current	0.34 A
Power Factor	1.00

Tested Light Source

Product family	FL200-G2
Luminaire configuration	FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)
Manufacturer	GVA Lighting, Inc.
Size (width x length x height)	106 mm 0 mm x 430 mm

Main Light Measurement Results

Output – Total Lumen	4562 - 0% / 100%
Efficiency	35.39 lm/W
Peak Intensity	17805
Correlated Color Temperature, CCT	n/a
Color Rendering Index	n/a
Beam Angle (FWHM) | C0/180	22.8°
Beam Angle (FWHM) | C90/270	23.4°
Field Angle (10%) | C0/180	48.6°Unit: 0-100% of peak intensity
Optical Power	9451 mW
Peak Wavelength	522 nm
Dominant Wavelength	527 nm

Polar Light Distribution Diagram
Unit: 0-100% of peak intensity

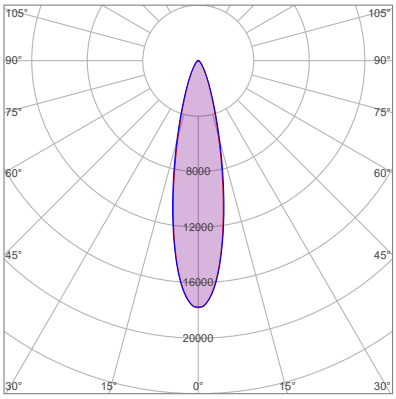

C0 - C180
C90 - C270
η = 100%

Linear distribution Diagram

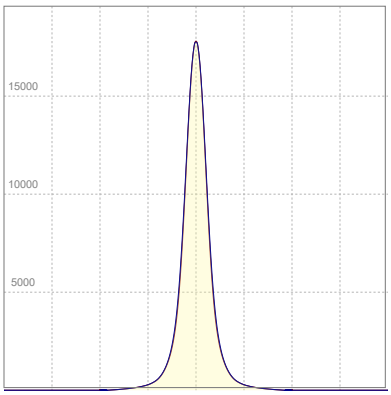

Spectral Distribution

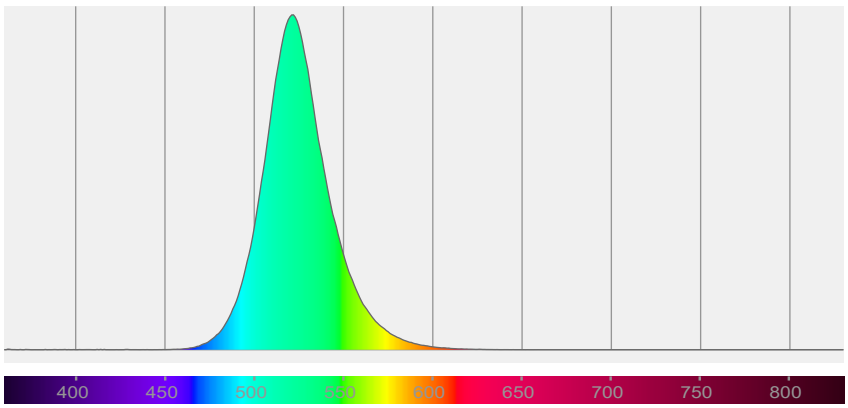

Color Temperature

NaN K

Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

Luminous Intensity diagram

Unit: 0-100% of peak intensity

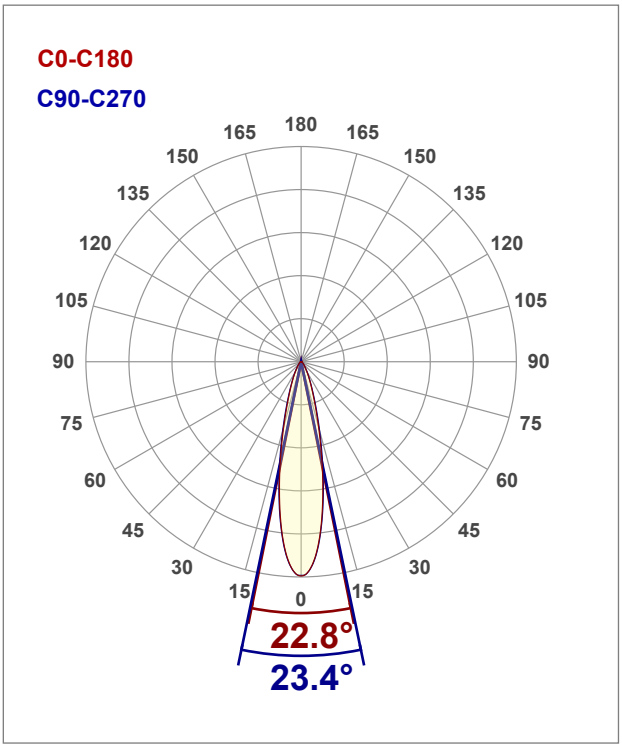

Main Values

Output (total Lumen)	4562 lm
Lumen Up% / Down%	0% / 100%
Peak Intensity	17805 cd
Beam Angle (50%-FWHM)	23.0°

EU Ecodesign parameters

Directionality (DLS or NDLS)	DLS
Ecodesign Useful Luminous Flux	4227 lm
Ecodesign Energy Class	G

Intensity Ratio

In 120° cone	97.67%
In 90° cone	92.65%

Angular Distribution

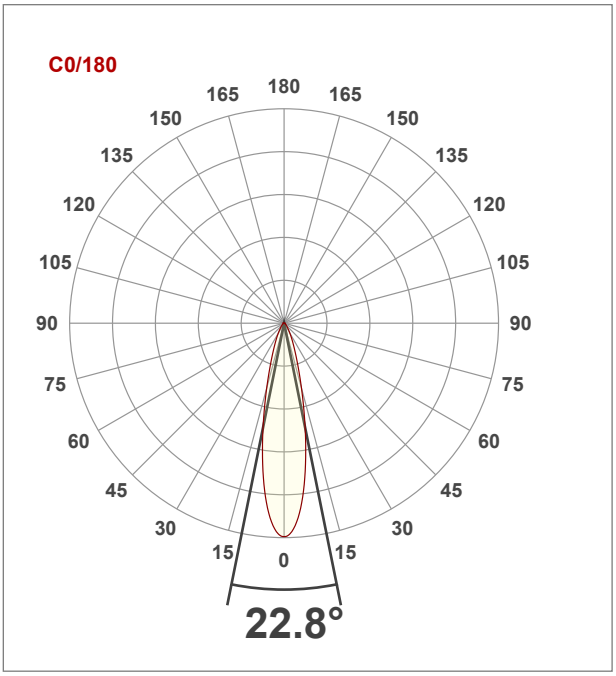

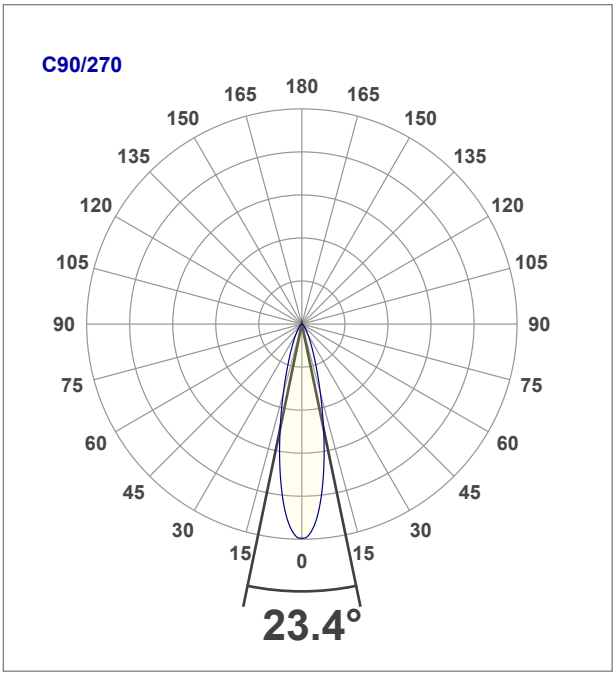

Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

Iso-intensity Diagram (Iso-candela)

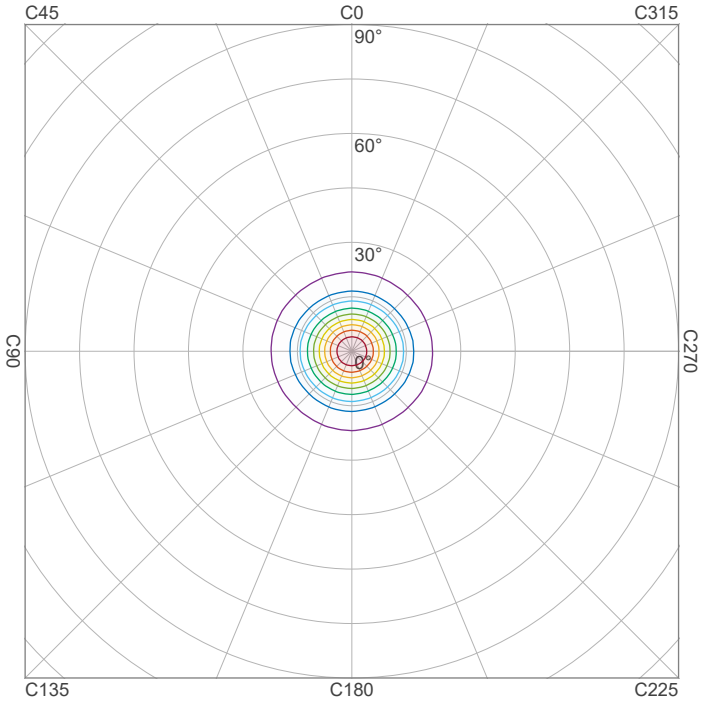

90 %	16003.1 cd
80 %	14225.0 cd
70 %	12446.8 cd
60 %	10668.7 cd
50 %	8890.6 cd
40 %	7112.5 cd
30 %	5334.4 cd
20 %	3556.2 cd
10 %	1778.1 cd

Peak intensity: 17781.2 cd

Number of c-planes: 36

Iso-illuminance Diagram (Iso-lux)

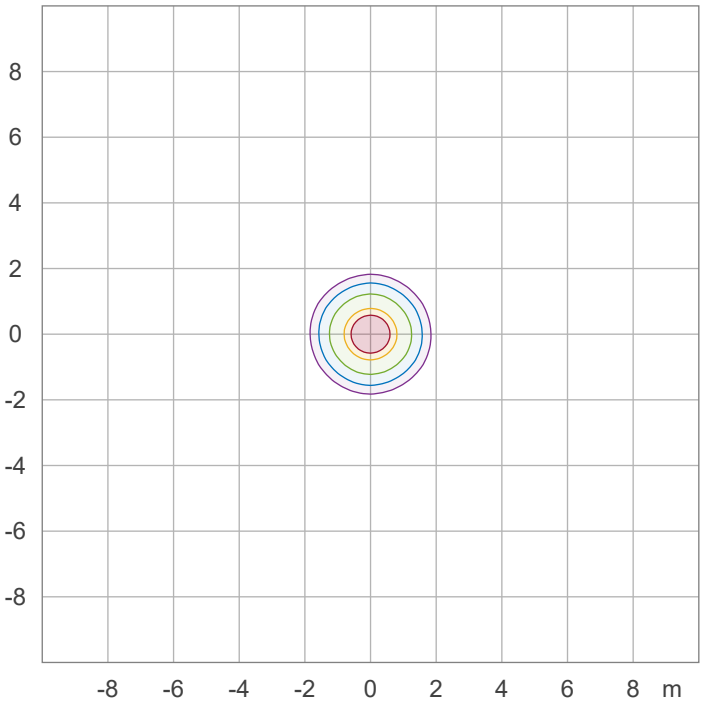

50.0 %	988 lx
30.0 %	593 lx
10.0 %	198 lx
5.0 %	98.8 lx
3.0 %	59.3 lx

Peak illuminance: 1976 lx

Mounting height: 3 m

Number of c-planes: 36

Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

Beam details

Distance (meter)	1 m	2 m	3 m	4 m	5 m
Distance (feet)	3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft

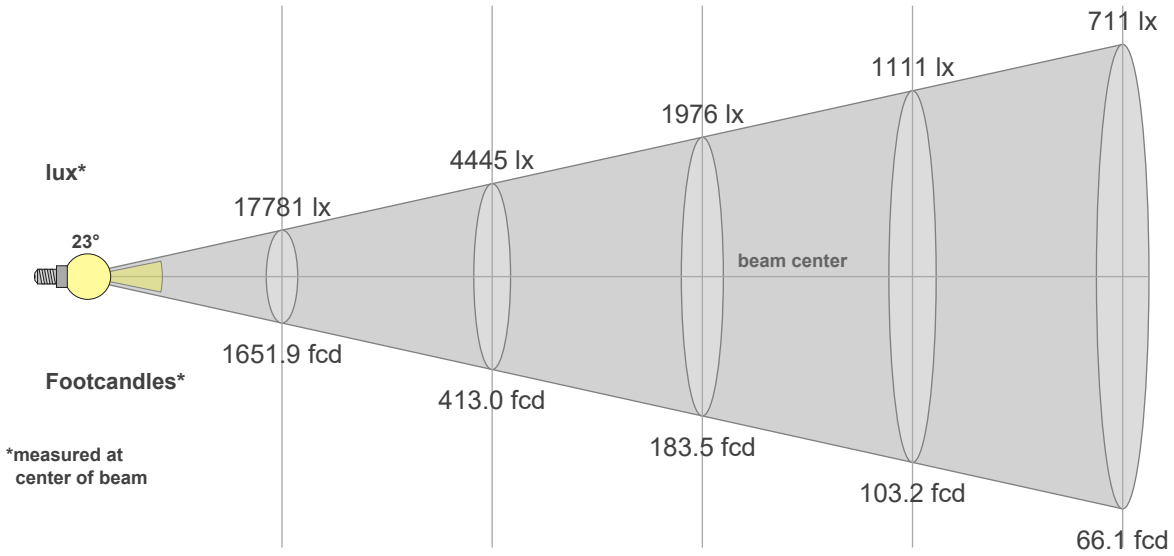

Beam width (meter)	0.4 m	0.8 m	1.2 m	1.6 m	2 m
Beam width (feet)	1.3 ft	2.7 ft	4 ft	5.3 ft	6.7 ft

Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
17781	4445	1976	1111	711	494	363	278	220	178	147	123	105	91	79	69	62	55	49	44	lux
1651.9	413	183.5	103.2	66.1	45.9	33.7	25.8	20.4	16.5	13.7	11.5	9.8	8.4	7.3	6.5	5.7	5.1	4.6	4.1	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
17.8k	17.4k	16.3k	14.7k	12.6k	10.4k	8.3k	6.4k	4.9k	3.8k	2.9k	2.3k	1.8k	1.5k	1.2k	1.0k	0.8k	0.7k	0.5k	0.5k	cd
100%	98%	92%	82%	71%	58%	46%	36%	28%	21%	16%	13%	10%	8%	7%	6%	4%	4%	3%	3%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
17.8k	17.4k	16.4k	14.8k	12.8k	10.6k	8.6k	6.7k	5.2k	4.0k	3.1k	2.4k	1.9k	1.5k	1.2k	1.0k	0.8k	0.7k	0.6k	0.5k	cd
100%	98%	92%	83%	72%	60%	48%	38%	29%	23%	17%	14%	11%	9%	7%	6%	5%	4%	3%	3%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
17.8k	17.4k	16.3k	14.7k	12.6k	10.4k	8.3k	6.4k	4.9k	3.8k	2.9k	2.3k	1.8k	1.5k	1.2k	1.0k	0.8k	0.7k	0.5k	0.5k	cd
100%	98%	92%	82%	71%	58%	46%	36%	28%	21%	16%	13%	10%	8%	7%	6%	4%	4%	3%	3%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
17.8k	17.4k	16.4k	14.8k	12.8k	10.6k	8.6k	6.7k	5.2k	4.0k	3.1k	2.4k	1.9k	1.5k	1.2k	1.0k	0.8k	0.7k	0.6k	0.5k	cd
100%	98%	92%	83%	72%	60%	48%	38%	29%	23%	17%	14%	11%	9%	7%	6%	5%	4%	3%	3%	of 0°val

Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

Power details

Input power	
Frequency of input power	0.0 Hz
Power feed to light source	128.9 W
RMS Input voltage feed V,RMS	381.4 V
RMS Input current feed I,RMS	0.34 A
Volt-Amp or apparent power = V,RMS*I,RMS	128.9 VA
Displacement factor of AC power feed	1.00
Power factor of AC current feed	1.00
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve

Efficiency

Radiated power efficiency	7.331
Lumen efficiency	35.39 lm/W

Stabilization details

Warmup Conditions		Color Temperature Change	
Stable period	15 min	CCT start	n/a
Stable change max	2%	CCT shift	n/a
Minimum time	15 min	CCT end	n/a
Warmup Result		**Output Change**	
Total warmup time	Not completed	Output start	4562 lm
Warmup variation	-0.0169%	Output change	-0.1201 lm
		Output end	4562 lm

Stabilization Curve

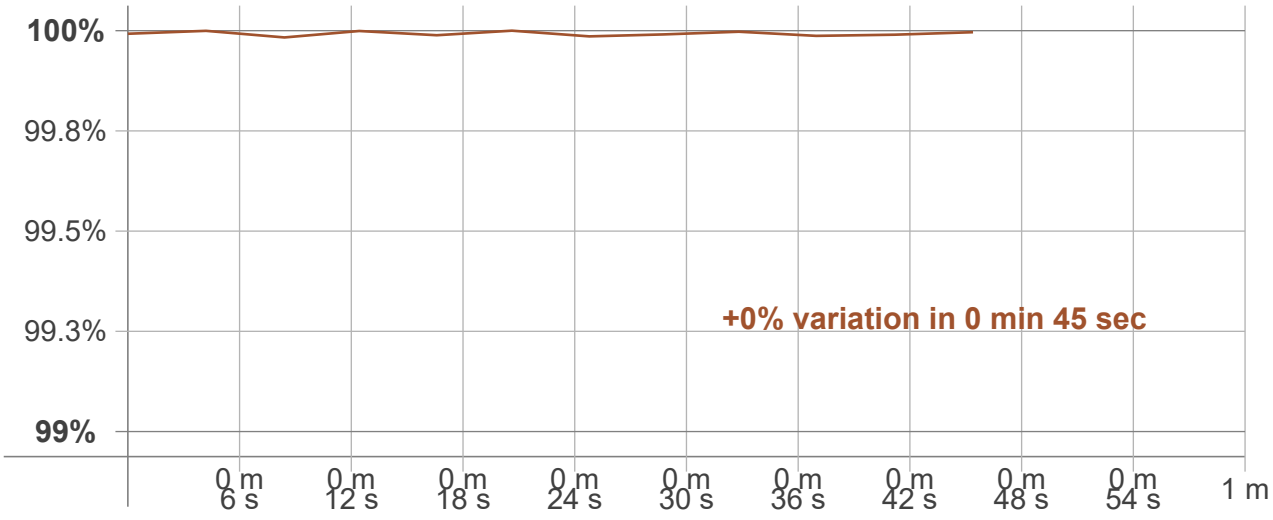

Photometric Test Report

FL200-G2-XXX-RGBW3083-OM-20-INF-XXXXX-X (G)

IESNA TM-15-07 LUMINIARE CLASSIFICATION SYSTEM FOR OUTDOOR LUMINAIRES

Forward Light			
Low (0-30°)	1860	lm	40.7%
Medium (30-60°)	371	lm	8.14%
High (60-80°)	52.7	lm	1.15%
Very High (80-90°)	0.757	lm	0.0166%
Back Light			
Low (0-30°)	1860	lm	40.7%
Medium (30-60°)	371	lm	8.14%
High (60-80°)	52.7	lm	1.15%
Very High (80-90°)	0.757	lm	0.0166%
Uplight			
Low (90-100°)	0	lm	0%
High (100-180°)	0	lm	0%
Total			
Sum	4562	lm	100%
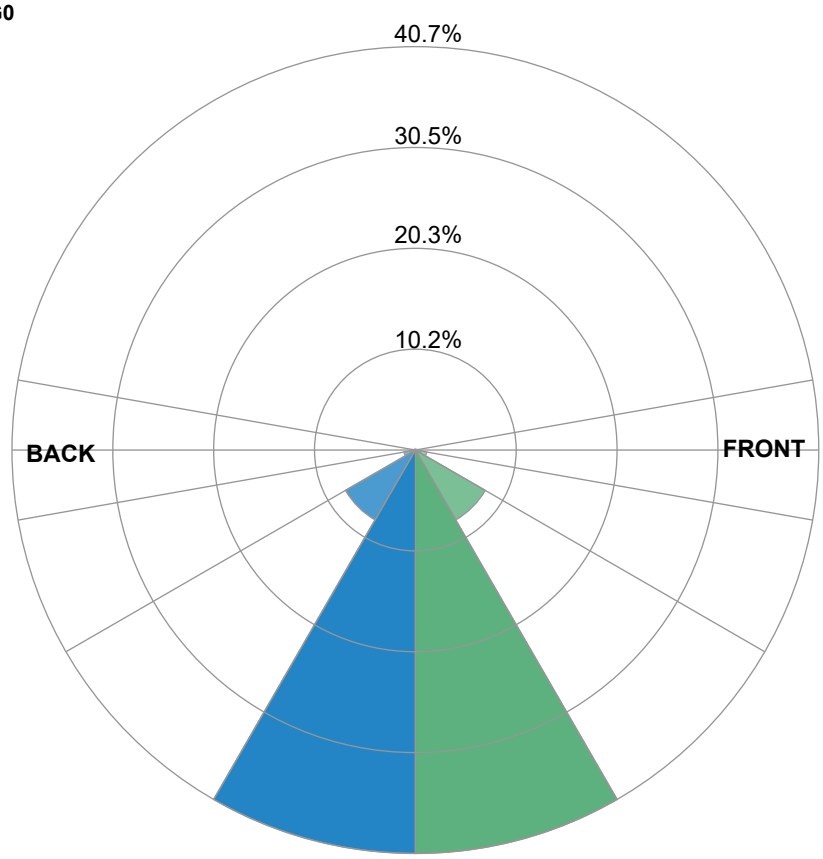
BUG RATING B3 U0 G0