Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Laboratory and Equipment

Test lab	Viso LabSpion - serial: 2007279764 sensor
Spectrometer Manufacturer and Model	LabSpion – Type C, horizontal
Measurement serial number	PH-GVA-2026.Feb.05-6837-VO
Measurement date	2026-02-05

Measurement Conditions

Tested c-planes	36 planes – 10°
Tested gamma resolution	1°
Input Power	52.3 W

Electrical Data

Input Power	52.3 W
Input Voltage	379 V DC
Input Current	0.138 A
Power Factor	1.0

Tested Light Source

Product family	FL50-G2
Luminaire configuration	FL50-G2-XXX-3083-30L-INF-XXXXX-X
Manufacturer	GVA Lighting, Inc
Size (width x length x height)	84 mm 0 mm x 250 mm

Main Light Measurement

Output – Total Lumen (Up% / Down%)	3456 lm – 0% / 100%
Efficiency	66 lm/W
Peak Intensity	18025 cd
Correlated Color Temperature, CCT	2964 K
Color Rendering Index	CRI 82.9
Beam Angle (FWHM) | C0/180	24.3°
Beam Angle (FWHM) | C90/270	24.6°
Field Angle (10%) | C0/180	41.6°Unit: 0-100% of peak intensity
Field Angle (10%) | C90/270	42.7°
Optical Power	10.4 mW
Peak Wavelength	606 nm
Dominant Wavelength	584 nm

Polar Light Distribution Diagram
Unit: 0-100% of peak intensity

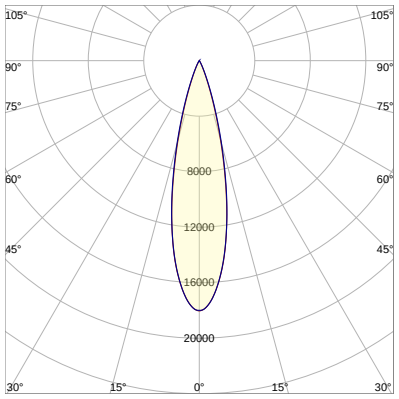

C0 - C180
C90 - C270
η = 100.0%

Linear distribution Diagram

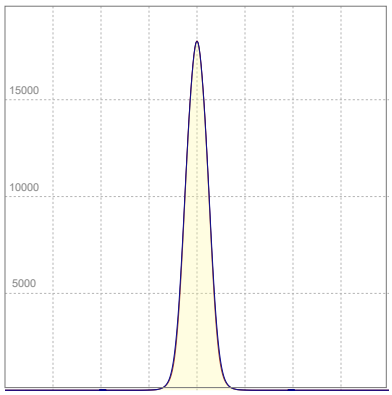

Spectral Distribution

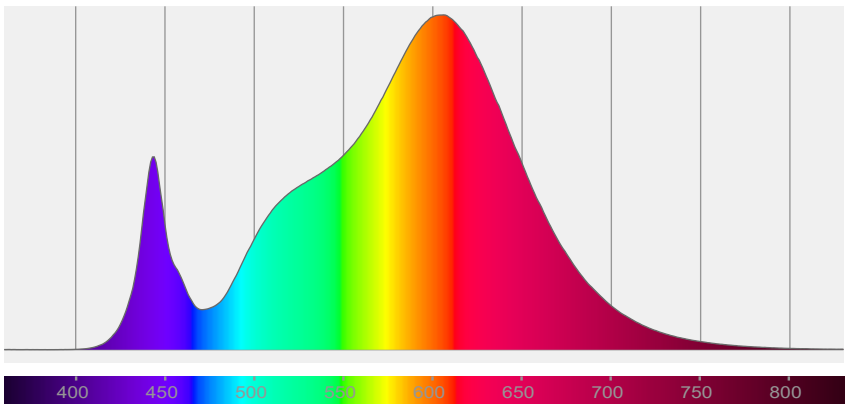

Color Temperature

2964 K

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Luminous Intensity diagram

Unit: 0-100% of peak intensity

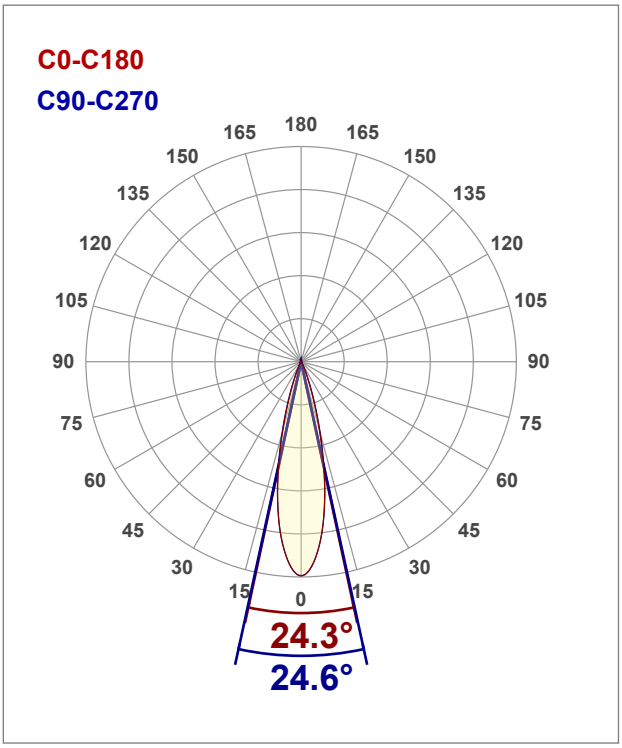

Main Values

Output (total Lumen)	3456 lm
Lumen Up% / Down%	0% / 100%
Peak Intensity	18025 cd
Beam Angle (50%-FWHM)	24.36°

EU Ecodesign parameters

Directionality (DLS or NDLS)	DLS
Ecodesign Useful Luminous	3454 lm
Ecodesign Energy Class	G

Intensity Ratio

In 120° cone	100.0%
In 90° cone	99.9%

Angular Distribution

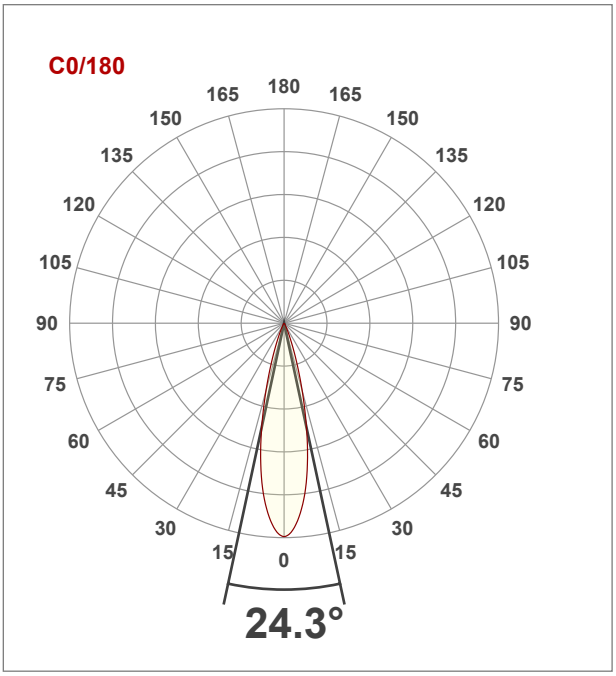

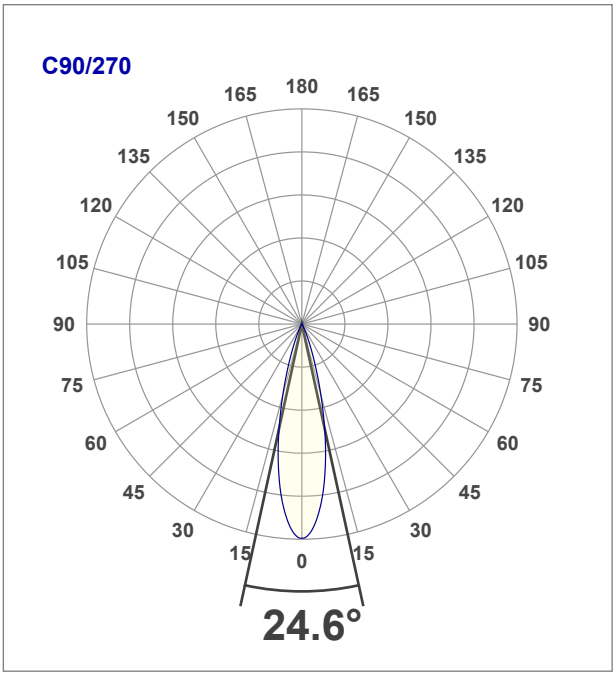

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Iso-intensity Diagram (Iso-candela)

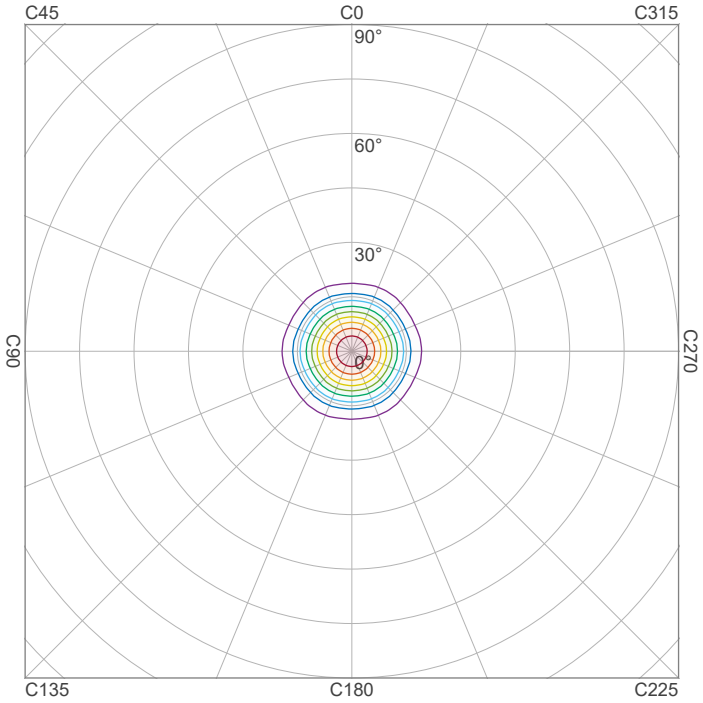

90 %	16207.1 cd
80 %	14406.3 cd
70 %	12605.5 cd
60 %	10804.7 cd
50 %	9003.9 cd
40 %	7203.1 cd
30 %	5402.4 cd
20 %	3601.6 cd
10 %	1800.8 cd

Peak intensity: 18007.9 cd
Number of c-planes: 36

Iso-illuminance Diagram (Iso-lux)

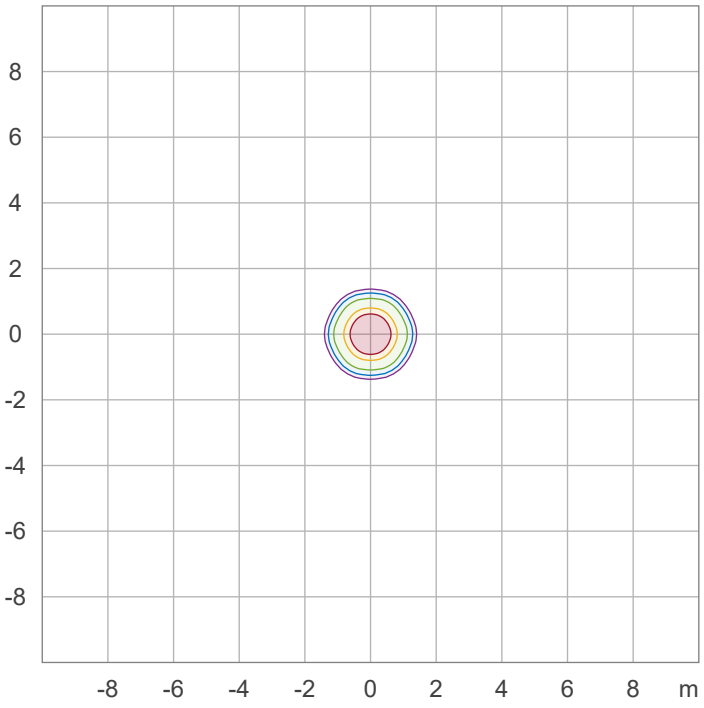

50.0 %	1000.4 lx
30.0 %	600.3 lx
10.0 %	200.1 lx
5.0 %	100.0 lx
3.0 %	60.0 lx

Peak illuminance: 2000.9 lx
Mounting height: 3.0 m
Number of c-planes: 36

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Color details

Correlated Color Temperature, Target	CCT = 2964 K	MacAdam Steps	SDCM = n/a
Correlated Color Temperature, Measured	CCT = 2964 K	Color deviation from BBL	Duv = -0.0003
Color Rendering Index	CRI 82.9	Color coordinates CIE 1931	(x;y) = (0.439;0.404)
Color Rendering Index, R9 (red)	R9 = 4.3	Color coordinate CIEs 1960	(u;v) = (0.252;0.348)
Color Rendering TM30-18	Rf 83.6	Color coordinate CIEs 1976	(u';v') = (0.252;0.522)
	Rg 98.7	Color Quality Scale	CQS = 81.6

CIE 1931 Chromaticity diagram

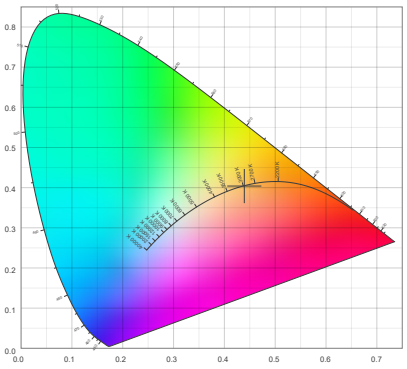

Spectral power distribution

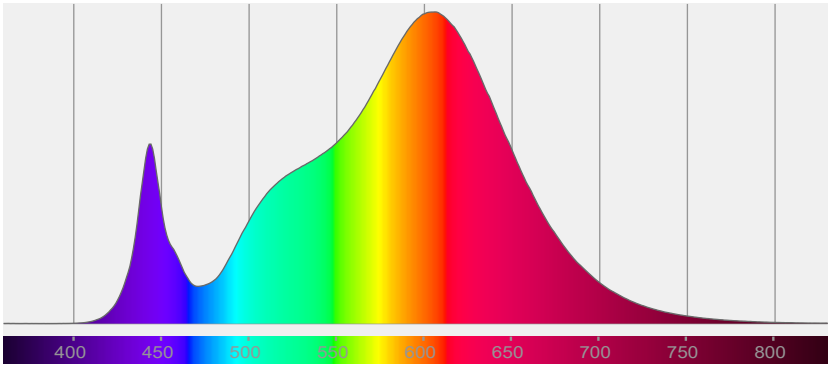

CIE 1931 Chromaticity - zoomed

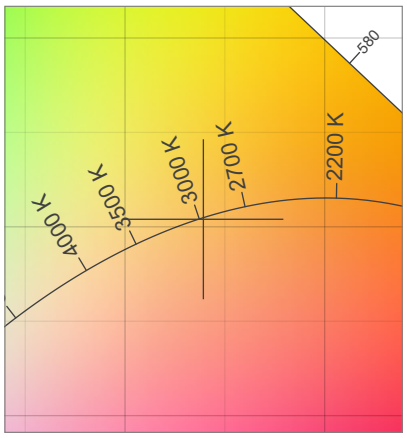

Color Rendering Index per reference color (CIE 1995)

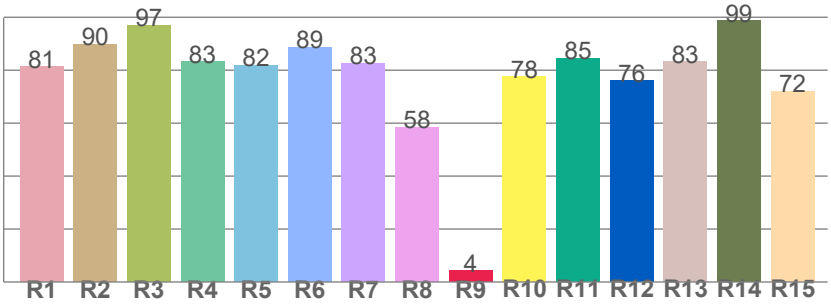

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.3	89.8	97.1	83.2	81.9	88.7	82.7	58.5	4.3	77.6	84.5	76.1	83.2	98.6	72.0

CIE 1931 Chromaticity - SDCM

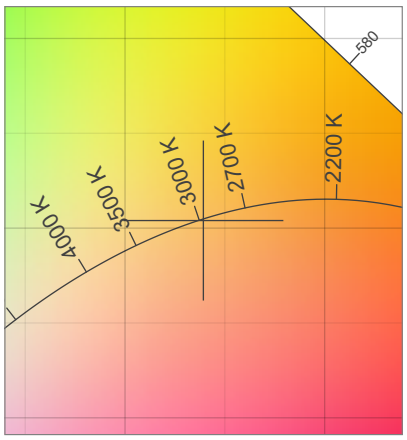

TM30-18 Rf-values per hue bin

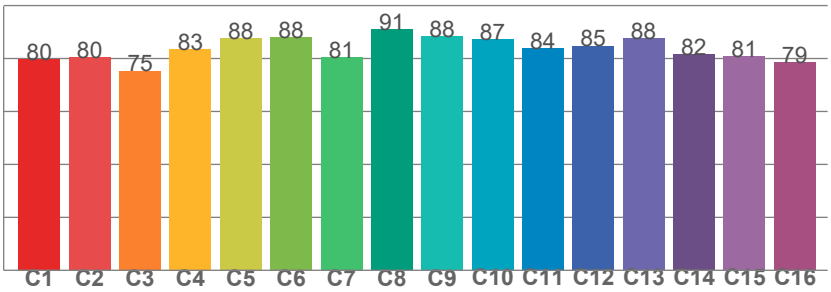

TM30-18 Rf-values per hue bin

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.8	80.4	75.3	83.4	87.6	88.0	80.5	91.0	88.3	87.2	84.0	84.8	87.6	81.6	80.9	78.7

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Color details - ANSI/IES TM-30-18 Color Rendition Report

Color Vector Graphic

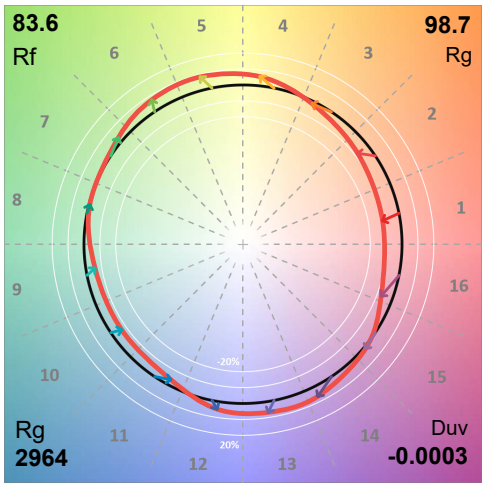

Color Distortion Graphic

Gamut Index vs. Fidelity Index

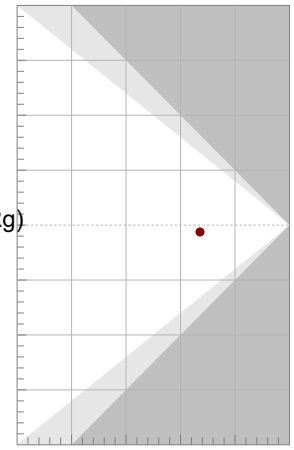

Gamut index (Rg)

Fidelity index (Rf)

Color Rendition by Color Evaluation Sample (CES)

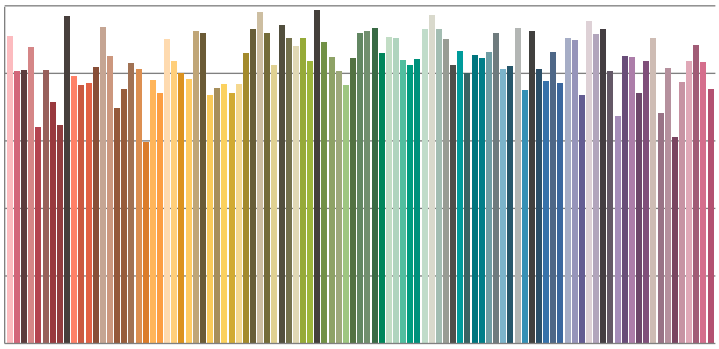

Color evaluation sample CES01 through CES99

Local Color Fidelity (per hue bin)

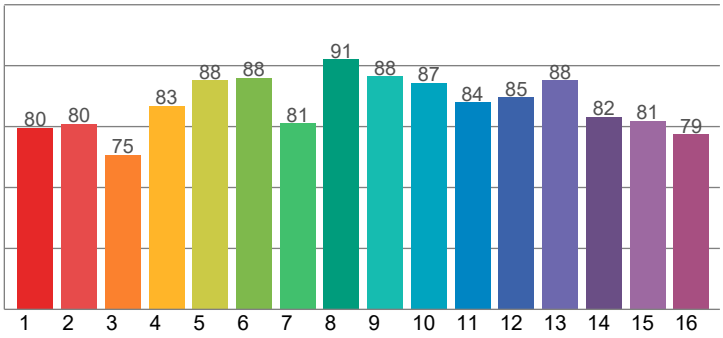

Hue angle bin (j)

Local Chroma Shift (per hue bin)

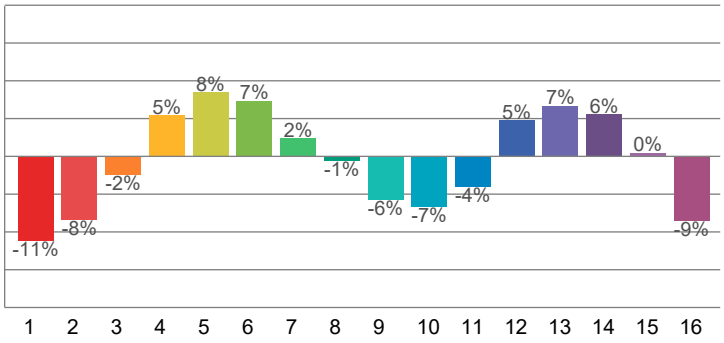

Hue angle bin (j)

CIE x	0.439
CIE y	0.439
CIE u'	0.252
CIE v'	0.522

CIE	13.3-1995
Ra	82.9
R9	4.3

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Beam details

Distance (meter)	1 m	2 m	3 m	4 m	5 m
Distance (feet)	3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft

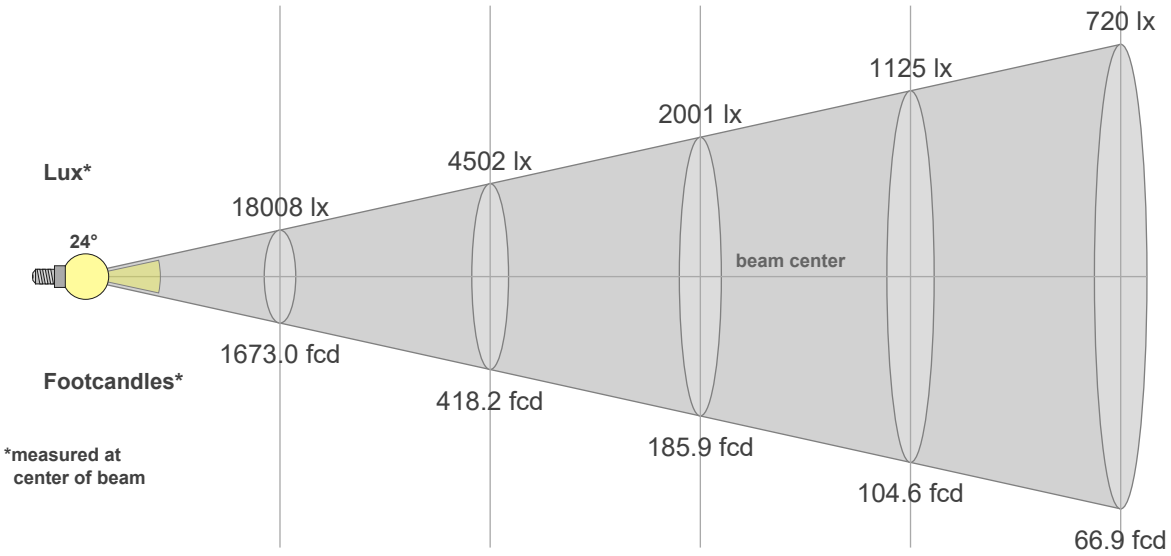

Beam width (meter)	0.4 m	0.9 m	1.3 m	1.7 m	2.2 m
Beam width (feet)	1.4 ft	2.8 ft	4.2 ft	5.7 ft	7.1 ft

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
18008	4502	2001	1125	720	500	368	281	222	180	149	125	107	92	80	70	62	56	50	45	lux
1673	418.2	185.9	104.6	66.9	46.5	34.1	26.1	20.7	16.7	13.8	11.6	9.9	8.5	7.4	6.5	5.8	5.2	4.6	4.2	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
18.0K	17.6K	16.7K	15.3K	13.5K	11.4K	9.1K	6.9K	5.0K	3.4K	2.2K	1.3K	0.8K	0.5K	0.3K	0.2K	0.1K	0.1K	0.1K	0.0K	cd
100%	98%	92%	85%	75%	63%	51%	39%	28%	19%	12%	7%	5%	3%	2%	1%	1%	0%	0%	0%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
18.0K	17.6K	16.7K	15.2K	13.5K	11.5K	9.3K	7.2K	5.3K	3.7K	2.4K	1.5K	1.0K	0.6K	0.4K	0.2K	0.1K	0.1K	0.1K	0.0K	cd
100%	98%	93%	85%	75%	64%	52%	40%	29%	20%	13%	9%	5%	3%	2%	1%	1%	0%	0%	0%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
18.0K	17.6K	16.7K	15.3K	13.5K	11.4K	9.1K	6.9K	5.0K	3.4K	2.2K	1.3K	0.8K	0.5K	0.3K	0.2K	0.1K	0.1K	0.1K	0.0K	cd
100%	98%	92%	85%	75%	63%	51%	39%	28%	19%	12%	7%	5%	3%	2%	1%	1%	0%	0%	0%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
18.0K	17.6K	16.7K	15.2K	13.5K	11.5K	9.3K	7.2K	5.3K	3.7K	2.4K	1.5K	1.0K	0.6K	0.4K	0.2K	0.1K	0.1K	0.1K	0.0K	cd
100%	98%	93%	85%	75%	64%	52%	40%	29%	20%	13%	9%	5%	3%	2%	1%	1%	0%	0%	0%	of 0°val

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

Power details

Input power	
Frequency of input power	0 Hz
Power feed to light source	52.3 W
RMS Input voltage feed V,RMS	379 V
RMS Input current feed I,RMS	0.138 A
Volt-Amp or apparent power = V,RMS*I,RMS	52.3 VA
Displacement factor of AC power feed	0.71
Power factor of AC current feed	1.0
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve

Efficiency

Radiated power efficiency	19.8%
Lumen efficiency	66 lm/W

Stabilization details

Warmup Conditions		Color Temperature Change	
Stable period	15 min	CCT start	2964 K
Stable change max	2.0%	CCT shift	0 K
Minimum time	15 min	CCT end	2964 K
Warmup Result		**Output Change**	
Total warmup time	Not completed	Output start	3457 lm
Warmup variation	0.0%	Output change	lm
		Output end	3456 lm

Stabilization Curve

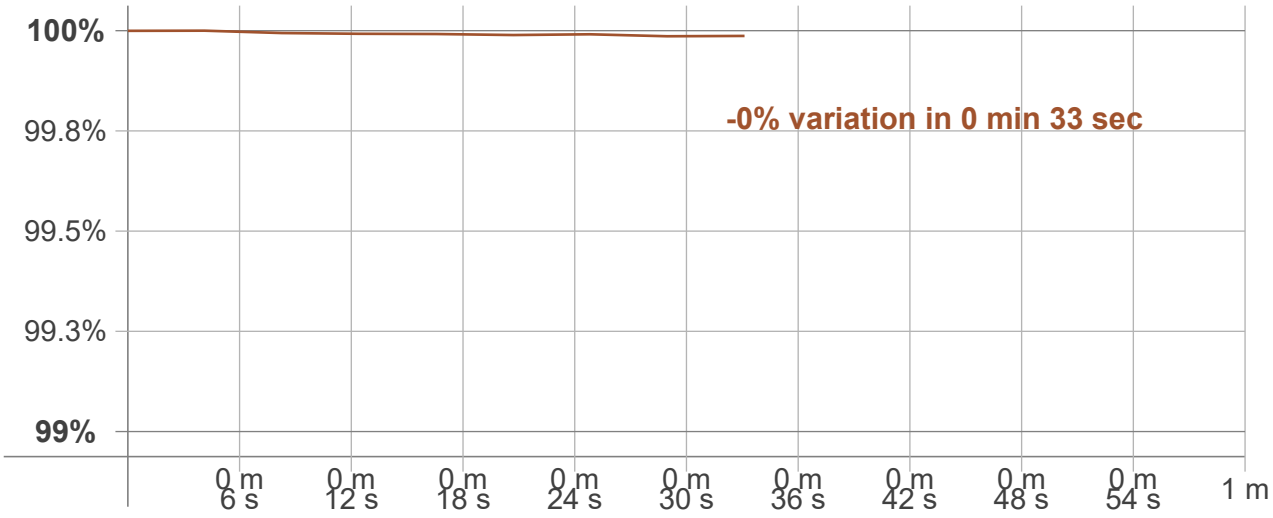

Photometric Test Report

FL50-G2-XXX-3083-30L-INF-XXXXX-X

IESNA TM-15-07 LUMINIARE CLASSIFICATION SYSTEM FOR OUTDOOR LUMINAIRES

Forward Light			
Low (0-30°)	1700.5	lm	49.2%
Medium (30-60°)	27.6	lm	0.8%
High (60-80°)	0	lm	0%
Very High (80-90°)	0	lm	0%
Back Light			
Low (0-30°)	1700.5	lm	49.2%
Medium (30-60°)	27.7	lm	0.8%
High (60-80°)	0	lm	0%
Very High (80-90°)	0	lm	0%
Uplight			
Low (90-100°)	0	lm	0%
High (100-180°)	0	lm	0%
Total			
Sum	3456.4	lm	100%
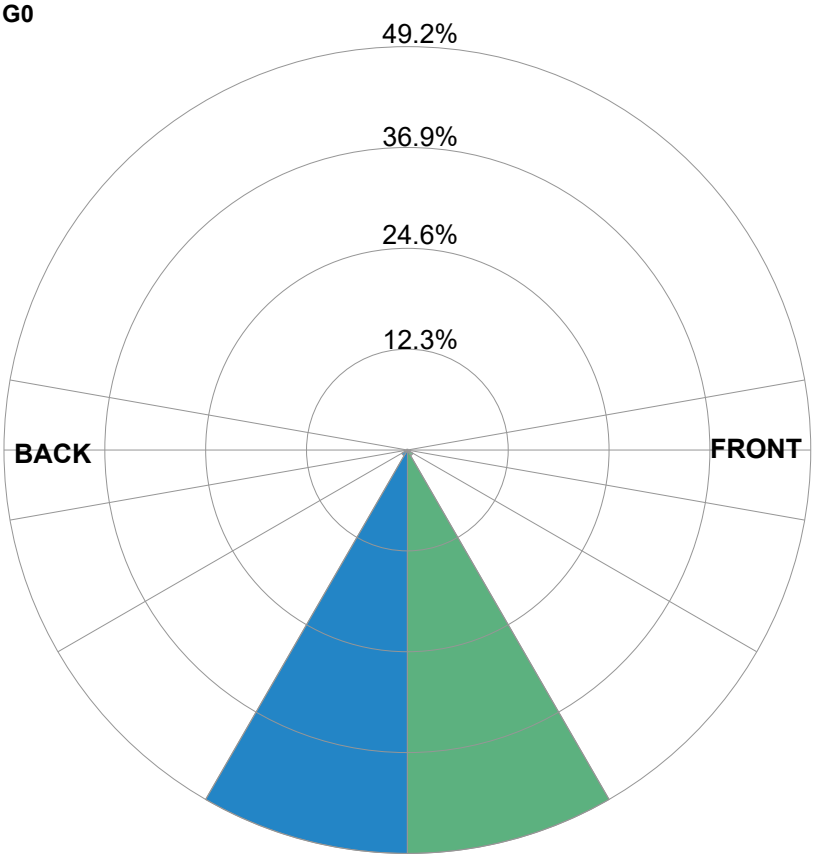
BUG RATING B3 U0 G0