Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Laboratory and Equipment

Test lab	Viso LabSpion - serial: 2007279764 sensor
Spectrometer Manufacturer and Model	LabSpion – Type C, horizontal
Measurement serial number	PH-GVA-2025.Nov.25-6029-VO
Measurement date	2025-11-25

Measurement Conditions

Tested c-planes	72 planes – 5°
Tested gamma resolution	1.5°
Input Power	52.3 W

Electrical Data

Input Power	52.3 W
Input Voltage	379 V DC
Input Current	0.138 A
Power Factor	1.0

Tested Light Source

Product family	FL50-G2
Luminaire configuration	FL50-G2-XXX-3083-6030-INF-XXXXX-X
Manufacturer	GVA Lighting, Inc
Size (width x length x height)	0 mm 0 mm x 10 mm

Main Light Measurement

Output – Total Lumen (Up% / Down%)	5535 lm – 0% / 100%
Efficiency	106 lm/W
Peak Intensity	8923 cd
Correlated Color Temperature, CCT	2960 K
Color Rendering Index	CRI 82.5
Beam Angle (FWHM) | C0/180	30.8°
Beam Angle (FWHM) | C90/270	59.1°
Field Angle (10%) | C0/180	57.9°Unit: 0-100% of peak intensity
Field Angle (10%) | C90/270	94.3°
Optical Power	16.6 mW
Peak Wavelength	604 nm
Dominant Wavelength	584 nm

Polar Light Distribution Diagram
Unit: 0-100% of peak intensity

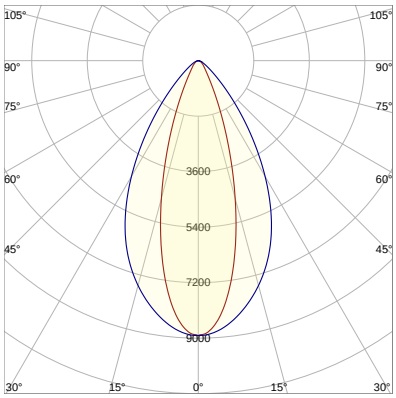

C0 - C180
C90 - C270
η = 100.0%

Linear distribution Diagram

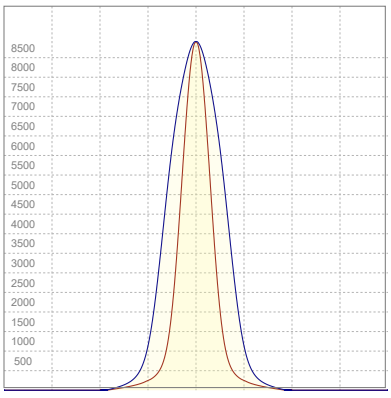

Spectral Distribution

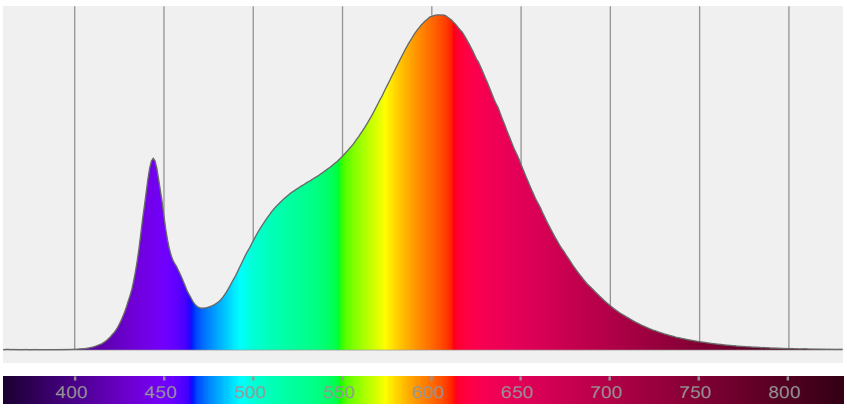

Color Temperature

2960 K

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Luminous Intensity diagram

Unit: 0-100% of peak intensity

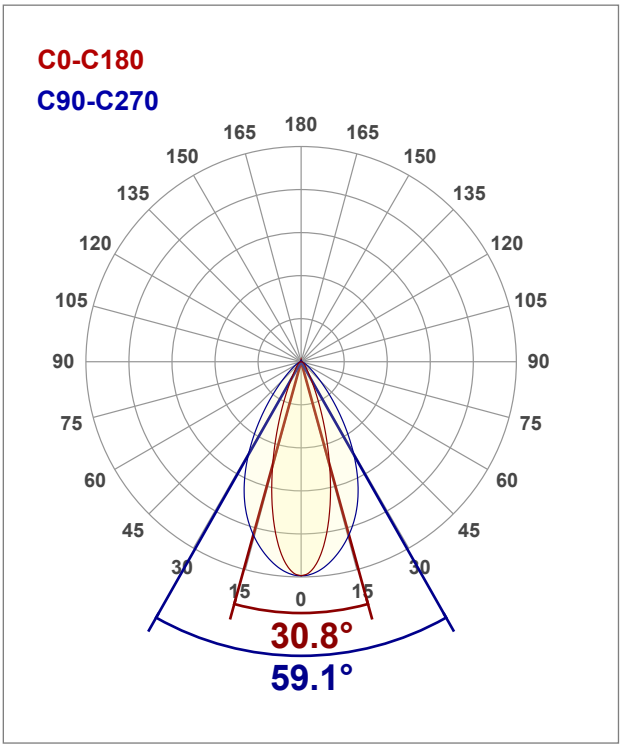

Main Values

Output (total Lumen)	5535 lm
Lumen Up% / Down%	0% / 100%
Peak Intensity	8923 cd
Beam Angle (50%-FWHM)	38.65°

EU Ecodesign parameters

Directionality (DLS or NDLS)	DLS
Ecodesign Useful Luminous	4978 lm
Ecodesign Energy Class	E

Intensity Ratio

In 120° cone	96.9%
In 90° cone	89.9%

Angular Distribution

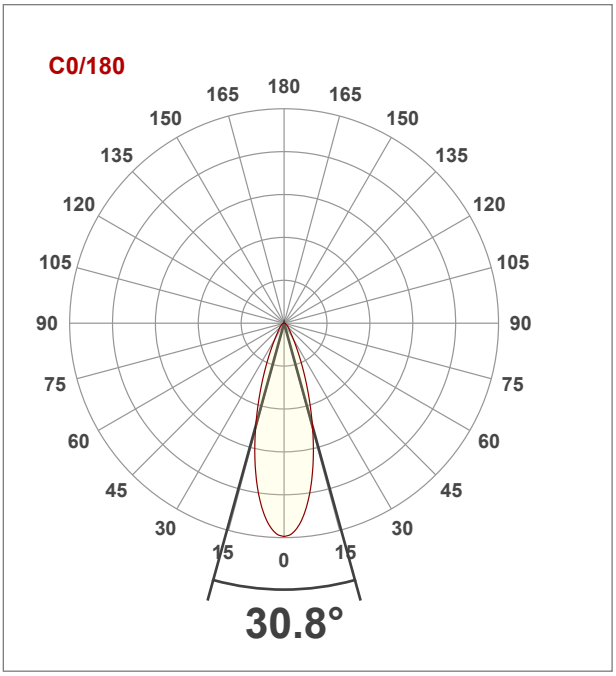

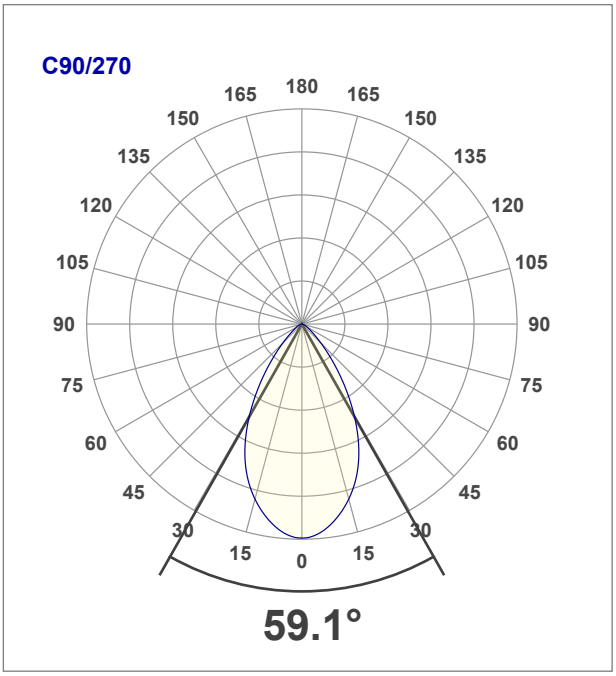

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Iso-intensity Diagram (Iso-candela)

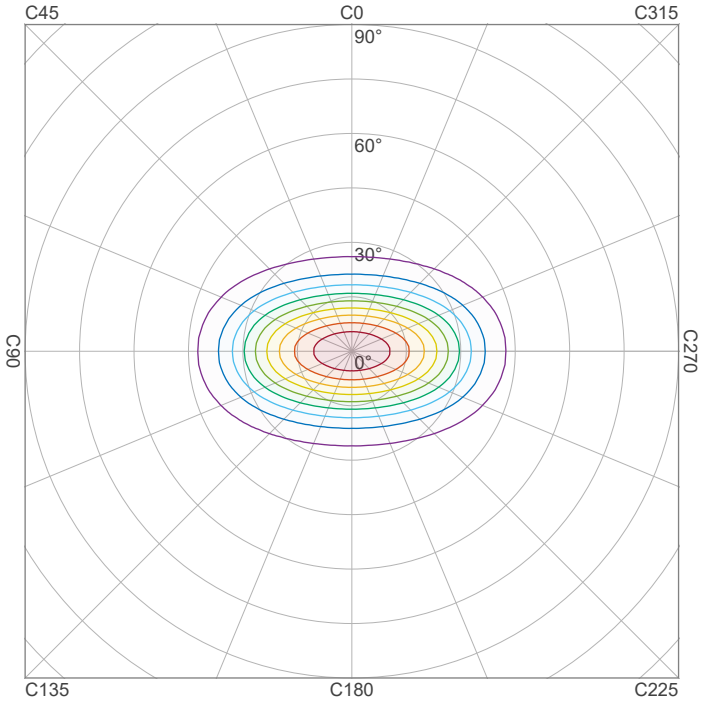

90 %	8023.9 cd
80 %	7132.3 cd
70 %	6240.8 cd
60 %	5349.2 cd
50 %	4457.7 cd
40 %	3566.2 cd
30 %	2674.6 cd
20 %	1783.1 cd
10 %	891.5 cd

Peak intensity: 8915.4 cd
Number of c-planes: 72

Iso-illuminance Diagram (Iso-lux)

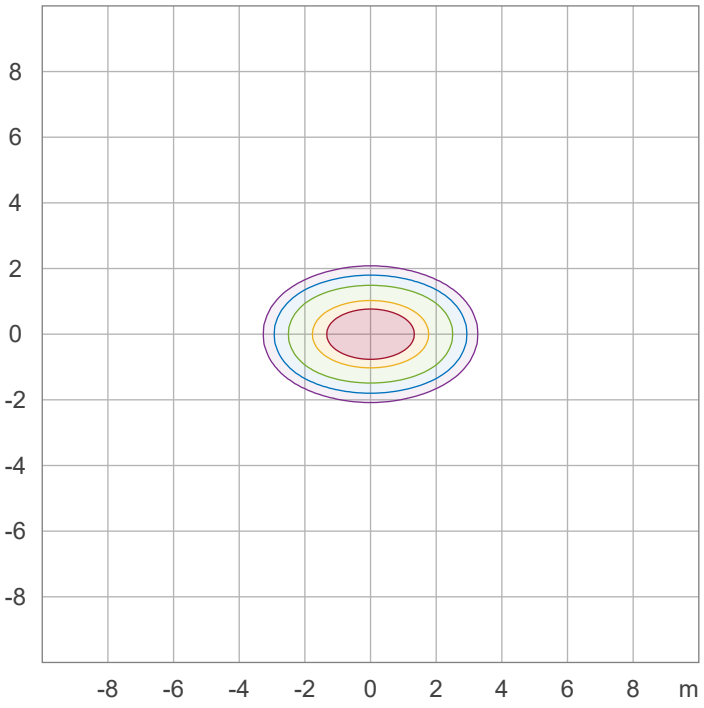

50.0 %	495.3 lx
30.0 %	297.2 lx
10.0 %	99.1 lx
5.0 %	49.5 lx
3.0 %	29.7 lx

Peak illuminance: 990.6 lx
Mounting height: 3.0 m
Number of c-planes: 72

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Color details

Correlated Color Temperature, Target	CCT = 2960 K	MacAdam Steps	SDCM = n/a
Correlated Color Temperature, Measured	CCT = 2960 K	Color deviation from BBL	Duv = -0.0007
Color Rendering Index	CRI 82.5	Color coordinates CIE 1931	(x;y) = (0.439;0.403)
Color Rendering Index, R9 (red)	R9 = 3.1	Color coordinate CIEs 1960	(u;v) = (0.252;0.347)
Color Rendering TM30-18	Rf 83.4	Color coordinate CIEs 1976	(u';v') = (0.252;0.521)
	Rg 98.6	Color Quality Scale	CQS = 81.2

CIE 1931 Chromaticity diagram

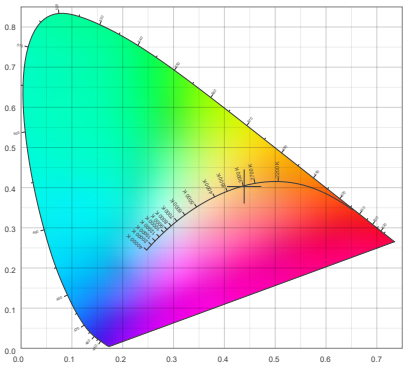

Spectral power distribution

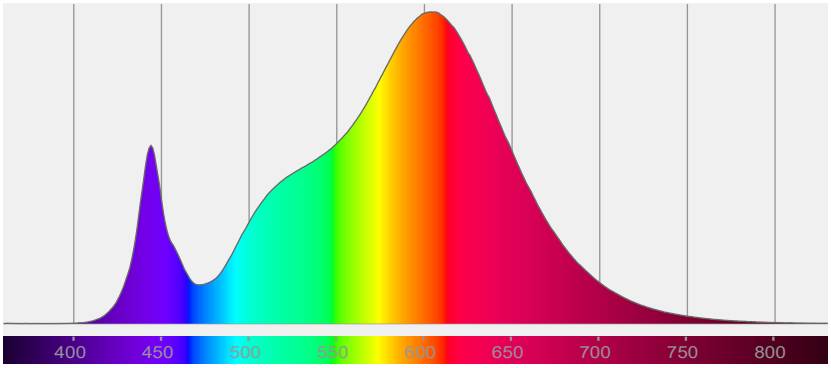

CIE 1931 Chromaticity - zoomed

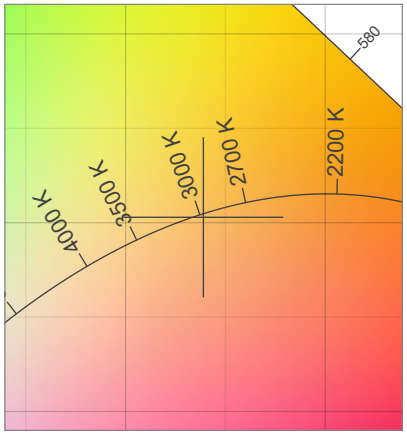

Color Rendering Index per reference color (CIE 1995)

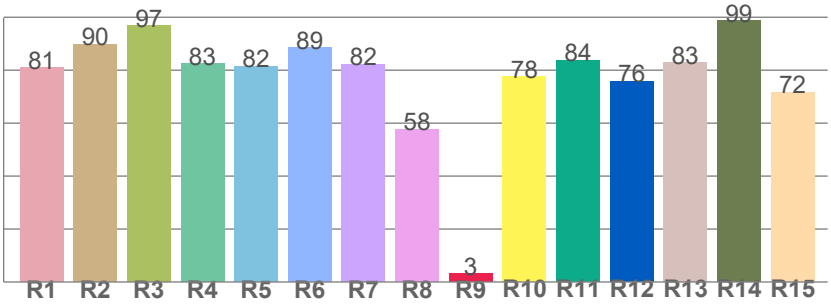

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.9	89.8	96.9	82.6	81.5	88.6	82.3	57.8	3.1	77.6	83.7	75.9	82.9	98.6	71.8

CIE 1931 Chromaticity - SDCM

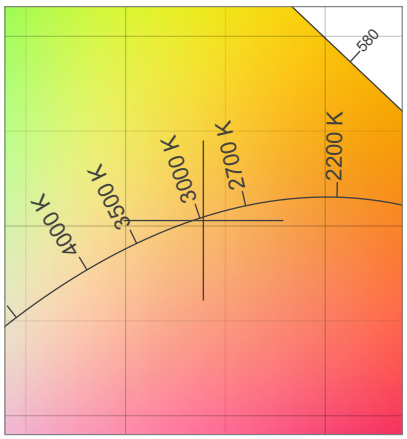

TM30-18 Rf-values per hue bin

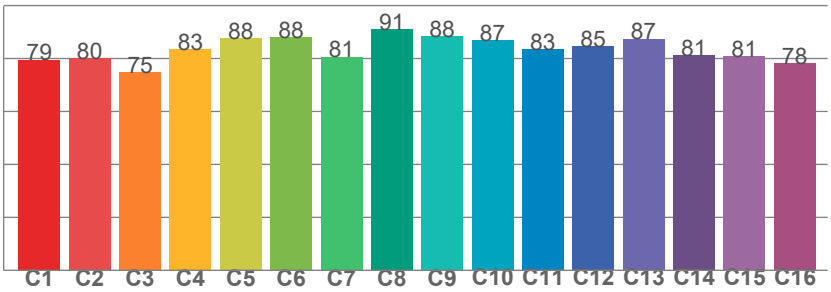

TM30-18 Rf-values per hue bin

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.5	80.0	74.7	83.3	87.7	87.9	80.6	91.0	88.3	87.0	83.5	84.6	87.5	81.3	80.8	78.3

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Color details - ANSI/IES TM-30-18 Color Rendition Report

Color Vector Graphic

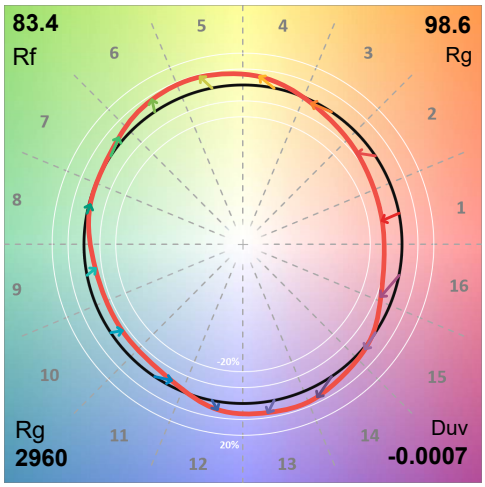

Color Distortion Graphic

Gamut Index vs. Fidelity Index

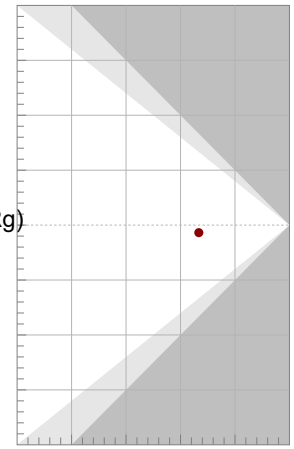

Gamut index (Rg)

Fidelity index (Rf)

Color Rendition by Color Evaluation Sample (CES)

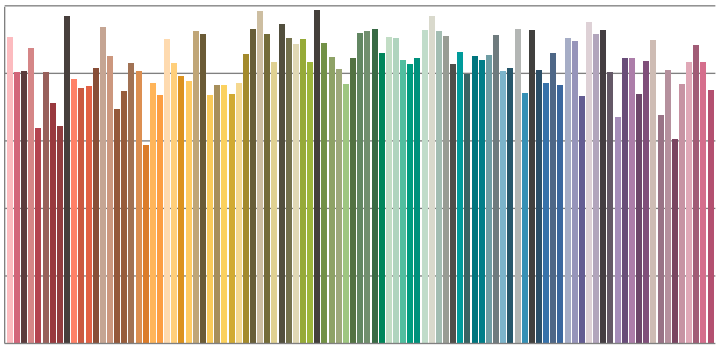

Color evaluation sample CES01 through CES99

Local Color Fidelity (per hue bin)

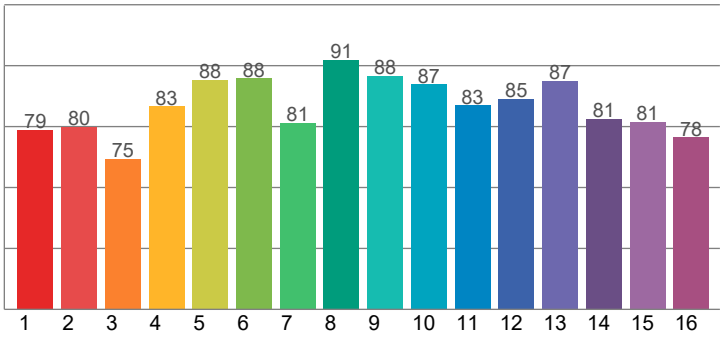

Hue angle bin (j)

Local Chroma Shift (per hue bin)

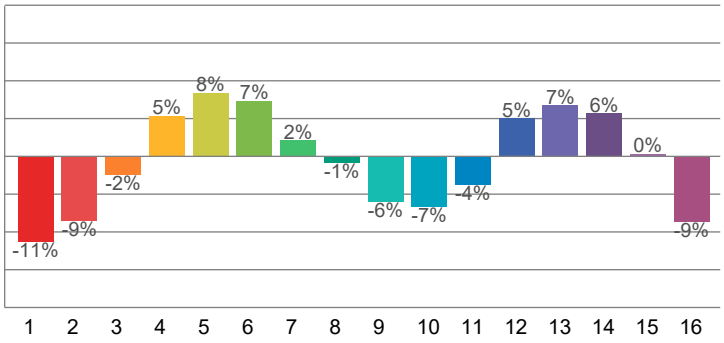

Hue angle bin (j)

CIE x	0.439
CIE y	0.439
CIE u'	0.252
CIE v'	0.521

CIE	13.3-1995
Ra	82.5
R9	3.1

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Beam details

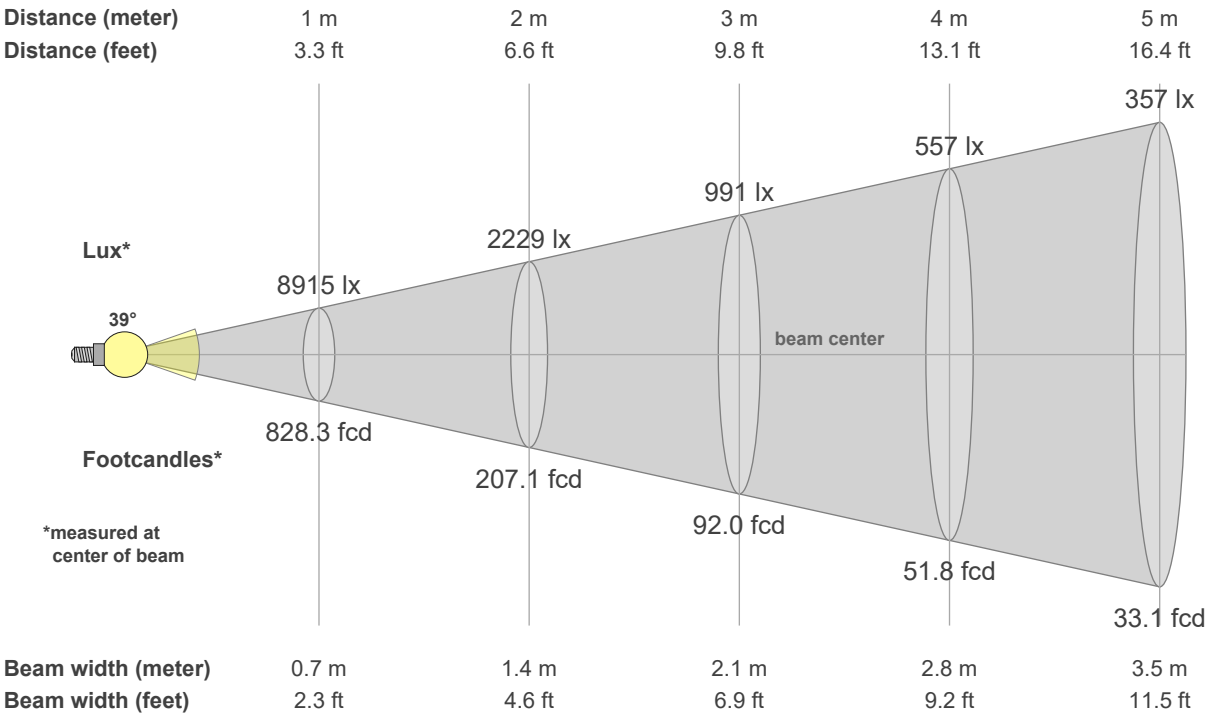

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
8915	2229	991	557	357	248	182	139	110	89	74	62	53	45	40	35	31	28	25	22	lux
828.3	207.1	92	51.8	33.1	23	16.9	12.9	10.2	8.3	6.8	5.8	4.9	4.2	3.7	3.2	2.9	2.6	2.3	2.1	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
8915	8800	8491	8012	7379	6644	5852	5030	4225	3461	2774	2184	1687	1298	1004	784	628	517	434	374	cd
100%	99%	95%	90%	83%	75%	66%	56%	47%	39%	31%	24%	19%	15%	11%	9%	7%	6%	5%	4%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
8915	8881	8792	8645	8453	8229	7974	7695	7390	7052	6683	6279	5833	5355	4852	4333	3810	3297	2808	2352	cd
100%	100%	99%	97%	95%	92%	89%	86%	83%	79%	75%	70%	65%	60%	54%	49%	43%	37%	31%	26%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
8915	8800	8491	8012	7379	6644	5852	5030	4225	3461	2774	2184	1687	1298	1004	784	628	517	434	374	cd
100%	99%	95%	90%	83%	75%	66%	56%	47%	39%	31%	24%	19%	15%	11%	9%	7%	6%	5%	4%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
8915	8881	8792	8645	8453	8229	7974	7695	7390	7052	6683	6279	5833	5355	4852	4333	3810	3297	2808	2352	cd
100%	100%	99%	97%	95%	92%	89%	86%	83%	79%	75%	70%	65%	60%	54%	49%	43%	37%	31%	26%	of 0°val

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

Power details

Input power	
Frequency of input power	0 Hz
Power feed to light source	52.3 W
RMS Input voltage feed V,RMS	379 V
RMS Input current feed I,RMS	0.138 A
Volt-Amp or apparent power = V,RMS*I,RMS	52.3 VA
Displacement factor of AC power feed	0.7
Power factor of AC current feed	1.0
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve

Efficiency

Radiated power efficiency	31.8%
Lumen efficiency	106 lm/W

Stabilization details

Warmup Conditions		Color Temperature Change	
Stable period	15 min	CCT start	2960 K
Stable change max	2.0%	CCT shift	0 K
Minimum time	15 min	CCT end	2960 K
Warmup Result		**Output Change**	
Total warmup time	Not completed	Output start	5535 lm
Warmup variation	+0.0%	Output change	+ lm
		Output end	5535 lm

Stabilization Curve

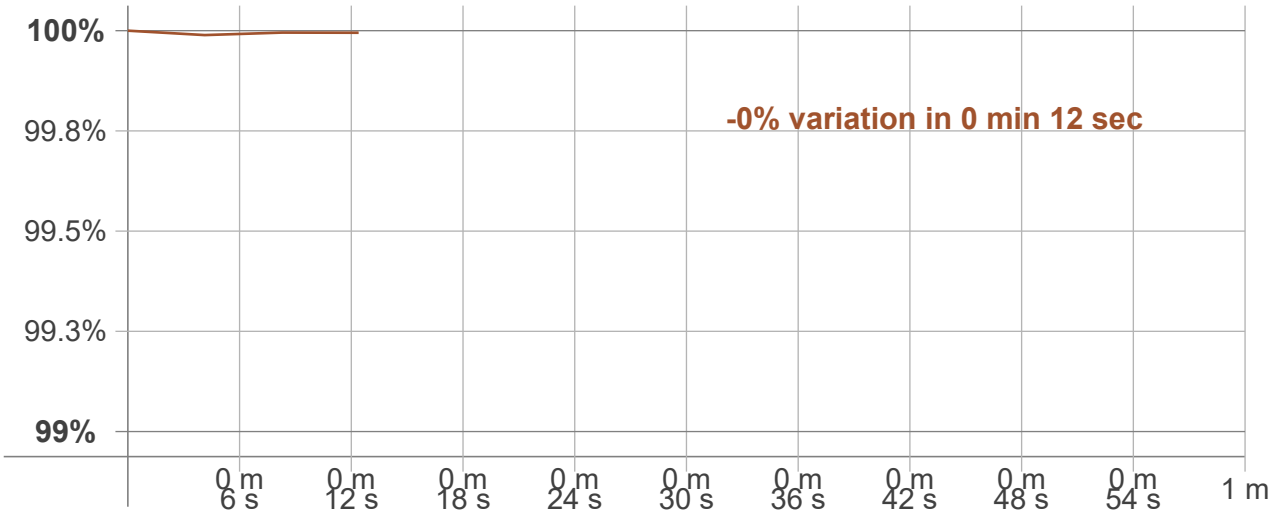

Photometric Test Report

FL50-G2-XXX-3083-6030-INF-XXXXX-X

IESNA TM-15-07 LUMINIARE CLASSIFICATION SYSTEM FOR OUTDOOR LUMINAIRES

Forward Light			
Low (0-30°)	1938.5	lm	35%
Medium (30-60°)	738.7	lm	13.3%
High (60-80°)	83.5	lm	1.5%
Very High (80-90°)	3.1	lm	0.1%
Back Light			
Low (0-30°)	1938.5	lm	35%
Medium (30-60°)	738.7	lm	13.3%
High (60-80°)	83.5	lm	1.5%
Very High (80-90°)	3.1	lm	0.1%
Uplight			
Low (90-100°)	0	lm	0%
High (100-180°)	0	lm	0%
Total			
Sum	5535.4	lm	100%
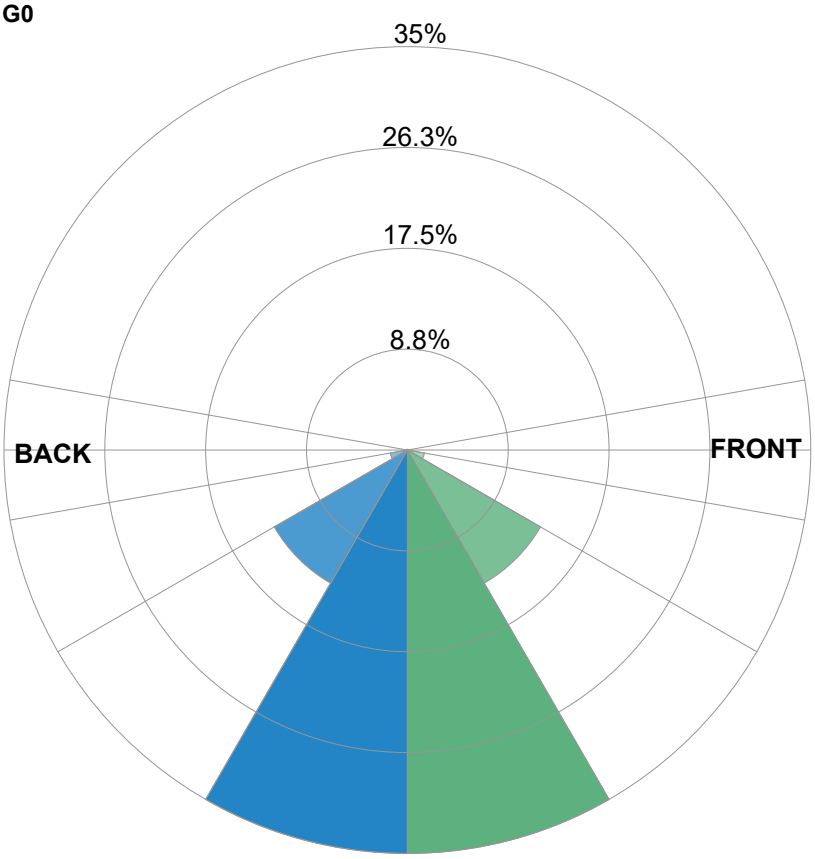
BUG RATING B3 U0 G0