



PRODUCT INFORMATION

MEASUREMENT SERIAL NUMBER:	PH-GVA-2024.Jan.03-2326-VO
DATE OF MEASUREMENT:	1/3/2024
MANUFACTURER:	GVA LIGHTING, INC.
PRODUCT NAME:	HIGHLIGHTER SERIES, HL-GEN4
SIZE (width x length x height):	23.3 mm x 300 mm x 42 mm
LOT:	GP-5-G/HR-4-L/RO-4-L/U73GY1
PROFILE LEGEND:	DLN – NICHE, DL – CLAMPING, CM – CLEAR MATTE, BM – BLACK MATTE, COVE-F – COVE FIXED, COVE-OD – COVE OUTDOOR, INF – INFINITY 380 V DC. ELV – 48 V DC.
	DLN – NICHE, DL – CLAMPING, F – FLAT, R – ROUND, SW – SATIN WHITE, B – BLACK, (RGBW) – ALL CHANNELS ON, (R) – RED, (G) – GREEN, (B) – BLUE, (W) – WHITE

ANGULAR DISTRIBUTION AT C0/180

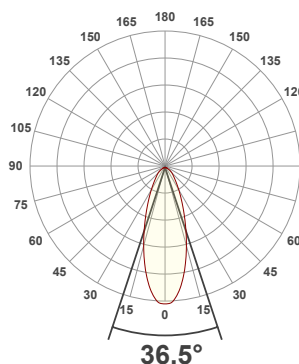

ANGULAR DISTRIBUTION AT C90/270

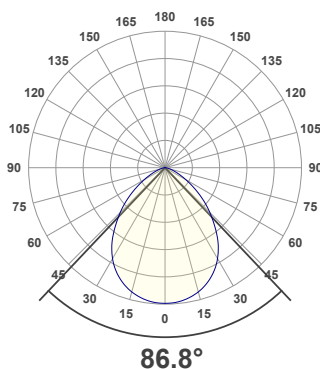


LIGHT OUTPUT DATA

TOTAL LUMEN OUTPUT:	408 lm
EFFICACY:	87 lm/W
PEAK INTENSITY:	360 cd
COLOR RENDERING INDEX (CRI):	82.2
COLOR TEMPERATURE (CCT):	3133K
FIDELITY INDEX (TM30Rf):	84.5
GAMUT INDEX (TM30Rg):	95.8

BEAM OUTPUT DATA

BEAM ANGLE (FWHM) C0/180:	36.5°
BEAM ANGLE (FWHM) C90/270:	86.8°
FIELD ANGLE (10%) C0/180:	86.2°
FIELD ANGLE (10%) C90/270:	132.7°
NUMBER OF PLANES MEASURED:	36


ISOCANDELA DIAGRAM

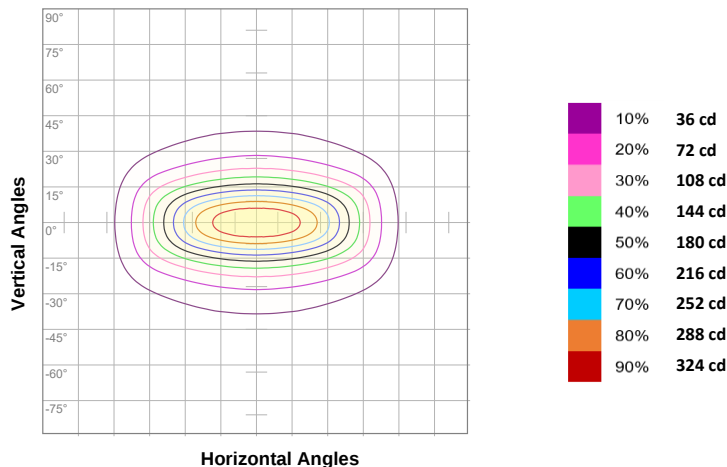


POWER OUTPUT DATA

INPUT POWER:	4.7 W
INPUT VOLTAGE:	380 V DC
INPUT CURRENT:	0.012 A
POWER FACTOR:	1.0
OPTICAL POWER:	1.22 mW
PEAK WAVELENGTH:	601 nm
DOMINANT WAVELENGTH:	583 nm


CIE 1931

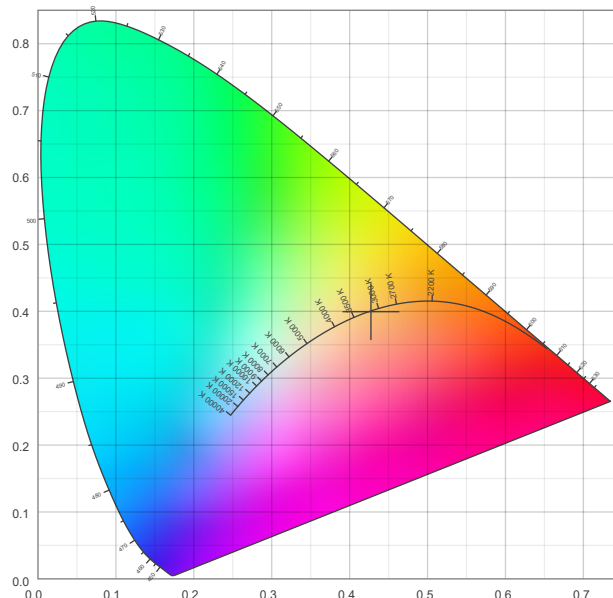


SPECTRAL DISTRIBUTION

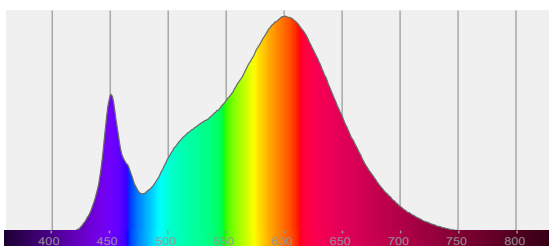

CIE 1931 ZOOM



BEAM DETAILS

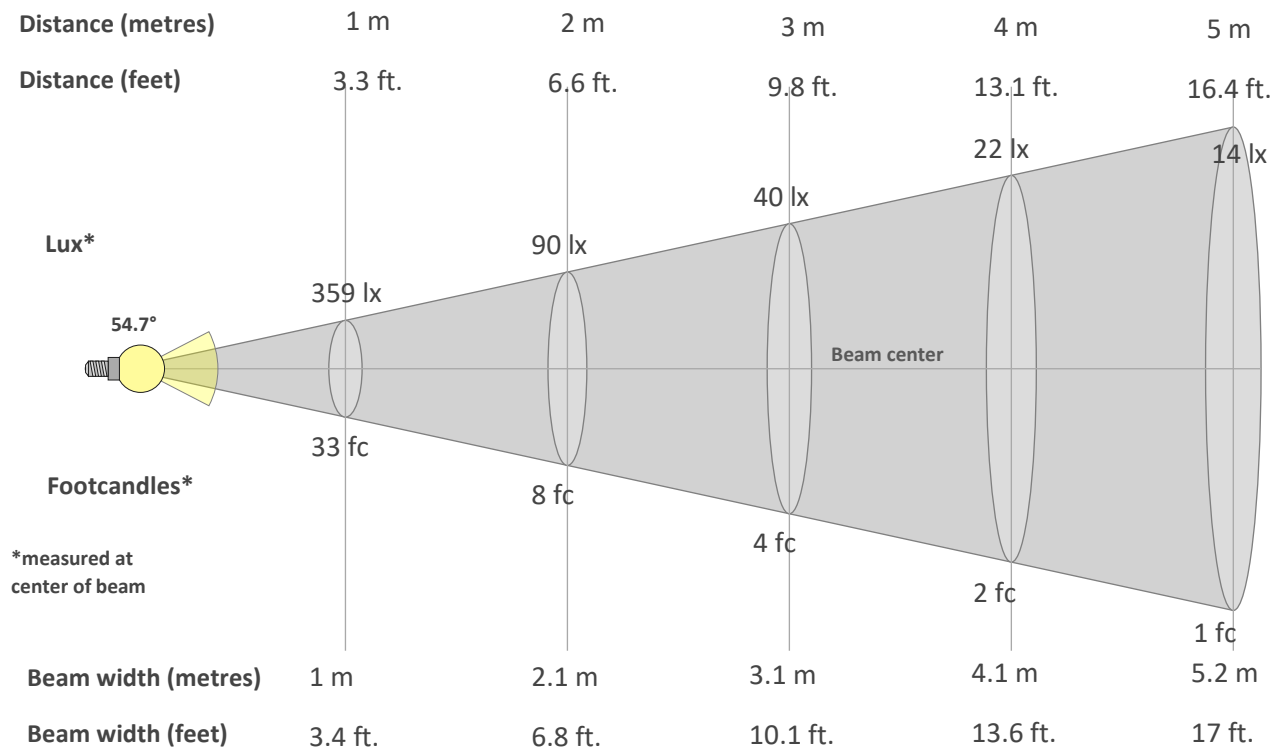

Beam intensity from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
359lx	90lx	40lx	22lx	14lx	10lx	7lx	6lx	4lx	4lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
33.4fc	8.3fc	3.7fc	2.1fc	1.3fc	0.9fc	0.7fc	0.5fc	0.4fc	0.3fc	0.3fc	0.2fc	0.2fc	0.2fc	0.1fc	0.1fc	0.1fc	0.1fc	0.1fc	0.1fc

Intensity in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
359	339	285	219	158	111	79	57	42	32	26	21	16	11	7	4	3	1	0	0
100%	94%	79%	61%	44%	31%	22%	16%	12%	9%	7%	6%	4%	3%	2%	1%	1%	0%	0%	0%

Intensity in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
359	358	351	341	325	305	278	245	206	168	131	95	64	41	25	14	7	3	1	0
100%	99%	98%	95%	90%	85%	77%	68%	57%	47%	36%	26%	18%	11%	7%	4%	2%	1%	0%	0%

Intensity in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
359	339	285	219	158	111	79	57	42	32	26	21	16	11	7	4	3	1	0	0
100%	94%	79%	61%	44%	31%	22%	16%	12%	9%	7%	6%	4%	3%	2%	1%	1%	0%	0%	0%

Intensity in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
359	358	351	341	325	305	278	245	206	168	131	95	64	41	25	14	7	3	1	0
100%	99%	98%	95%	90%	85%	77%	68%	57%	47%	36%	26%	18%	11%	7%	4%	2%	1%	0%	0%