





PRODUCT INFORMATION

MEASUREMENT SERIAL NUMBER:	PH-GVA-2024.Feb.26-2700-VO
DATE OF MEASUREMENT:	2/26/2024
MANUFACTURER:	GVA LIGHTING, INC.
PRODUCT NAME:	STR10 ARCHITECTURAL
SIZE (width x length x height):	49 mm x 300 mm x 61 mm
LOT:	sm303D300L2R8000
PROFILE LEGEND:	PIXEL RESOLUTION: R150/200/300 – PIXEL SIZE 150/200/300 mm
CM – CLEAR MATTE, BM – BLACK MATTE, CU – CUSTOM COLOR	VOLTAGE LEGEND: INF – INFINITY 380 V DC, ELV – 48 V DC
INTERNAL ACCESSORIES: NL – NO LOUVER, ML – MICRO LOUVER	

ANGULAR DISTRIBUTION AT C0/180

ANGULAR DISTRIBUTION AT C90/270

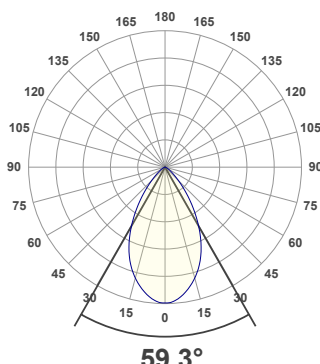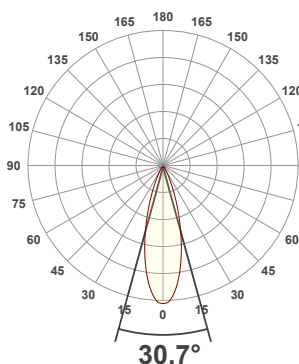

LIGHT OUTPUT DATA


TOTAL LUMEN OUTPUT:	1003 lm
EFFICACY:	51 lm/W
PEAK INTENSITY:	1637 cd
COLOR RENDERING INDEX (CRI):	84.6
COLOR TEMPERATURE (CCT):	3053K
FIDELITY INDEX (TM30Rf):	84.7
GAMUT INDEX (TM30Rg):	95.6

BEAM OUTPUT DATA

BEAM ANGLE (FWHM) C0/180:	30.7°
BEAM ANGLE (FWHM) C90/270:	59.3°
FIELD ANGLE (10%) C0/180:	58.1°
FIELD ANGLE (10%) C90/270:	96.2°
NUMBER OF PLANES MEASURED:	36

ISOCANDELA DIAGRAM


POWER OUTPUT DATA

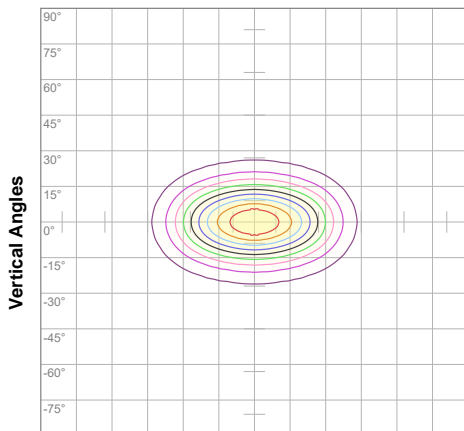

10%	163 cd
20%	327 cd
30%	490 cd
40%	653 cd
50%	817 cd
60%	980 cd
70%	1143 cd
80%	1307 cd
90%	1470 cd


INPUT POWER:	19.9 W
INPUT VOLTAGE:	380 V DC
INPUT CURRENT:	0.052 A
POWER FACTOR:	1.0
OPTICAL POWER:	3.08 mW
PEAK WAVELENGTH:	452 nm
DOMINANT WAVELENGTH:	583 nm

CIE 1931

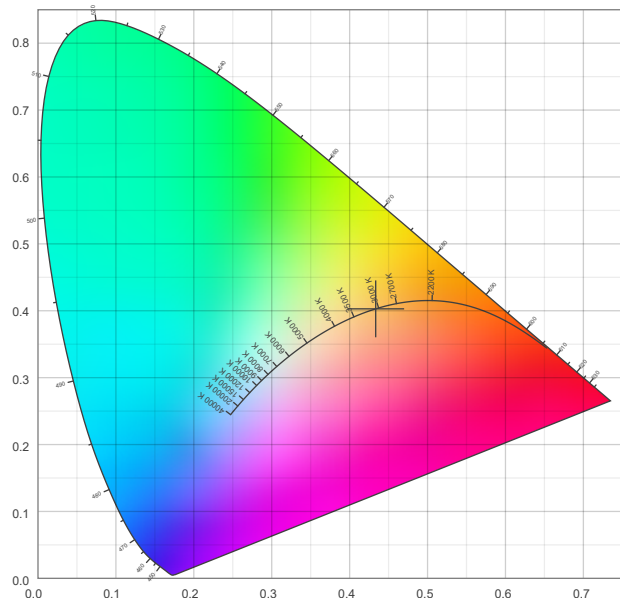

SPECTRAL DISTRIBUTION

CIE 1931 ZOOM

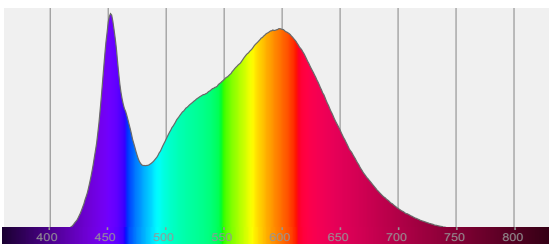

x:	0.433
y:	0.403
u:	0.249
v:	0.347
Δuv:	-0.0027



ZONAL LUMEN SUMMARY

0°-10° 141 lm	10°-20° 299 lm	20°-30° 263 lm	30°-40° 159 lm	40°-50° 78.4 lm	50°-60° 38.2 lm	60°-70° 18.6 lm	70°-80° 5.79 lm	80°-90° 0.204 lm
90°-100° 0.000 lm	100°-110° 0.000 lm	110°-120° 0.000 lm	120°-130° 0.000 lm	130°-140° 0.000 lm	140°-150° 0.000 lm	150°-160° 0.000 lm	160°-170° 0.000 lm	170°-180° 0.000 lm

COLOR DETAILS

TM30: 84.7

CRI: 84.6 (R1-R8)

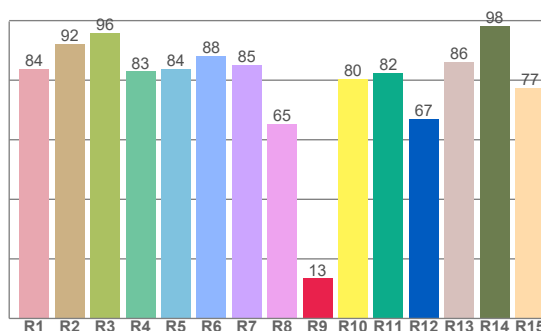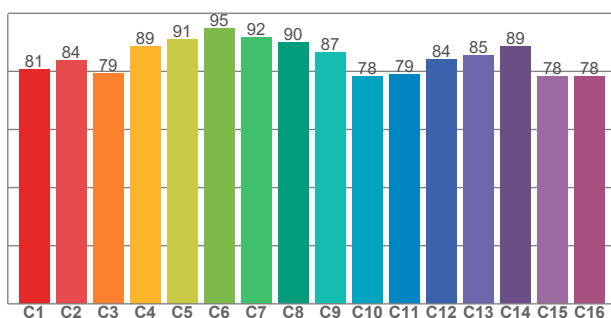


TM30 C values, 16 binned values out of total of 99 C values

CRI R values, only R1-R8 are used to calculate final CRI value

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80.6	83.7	79.3	88.6	90.9	94.7	91.6	89.9	86.7	78.4	79.1	84.3	85.5	88.6	78.3	78.4


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83.7	92.1	95.8	83.0	83.8	88.2	85.0	65.2	13.4	80.5	82.3	67.0	86.2	98.3	77.4

TM30 COLOR EVALUATION SAMPLE

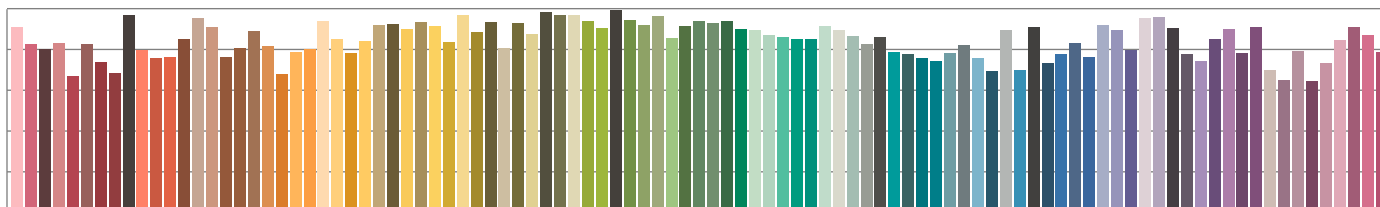

TM30 DETAILS

Bin	Color	Rf	Chroma Shift
R1	Red	84	82
R2	Orange	92	98
R3	Yellow	96	80
R4	Green	83	76
R5	Teal	84	81
R6	Blue	88	84
R7	Purple	85	86
R8	Pink	65	89
R9	Red	13	98
R10	Yellow	80	89
R11	Green	82	85
R12	Blue	67	83
R13	Orange	86	83
R14	Yellow	98	73
R15	Orange	77	76

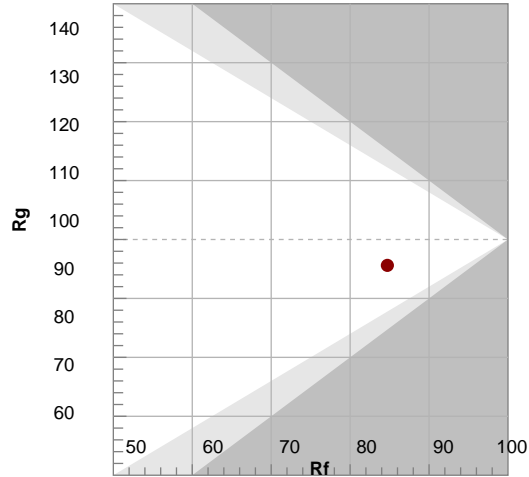

FIDELITY INDEX


Rf 84.7

GAMUT INDEX


Rg 95.6

Approx. limits for sources on the Planckian locus.
 Approx. limits for practical light sources.


TM30 OVER 50

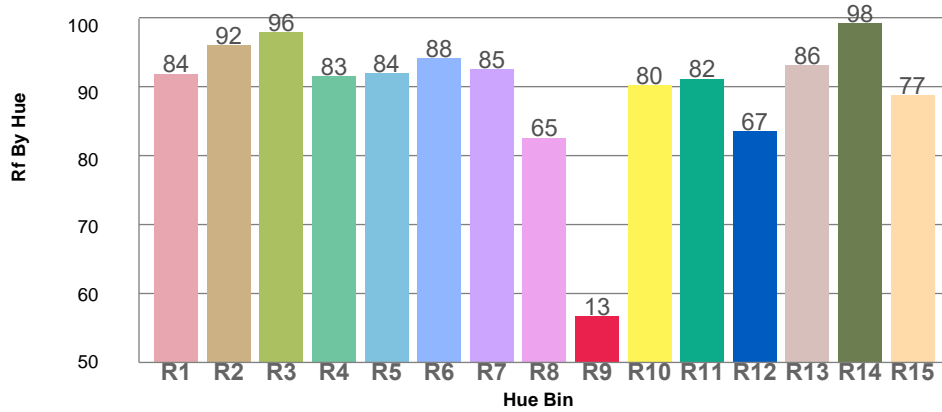

COLOR VECTOR GRAPHICS

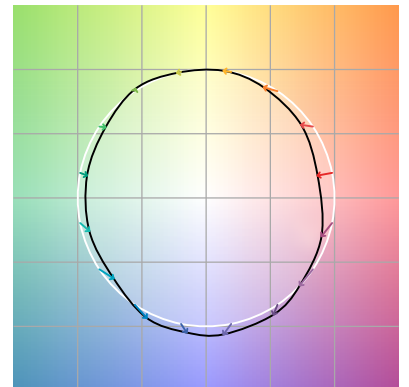


TM30 CHROMA SHIFT

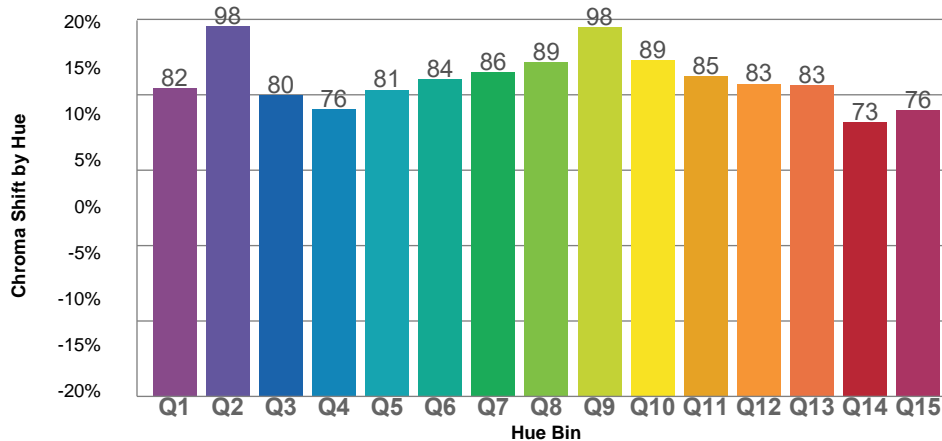

COLOR DISTORTION GRAPHICS



BEAM DETAILS

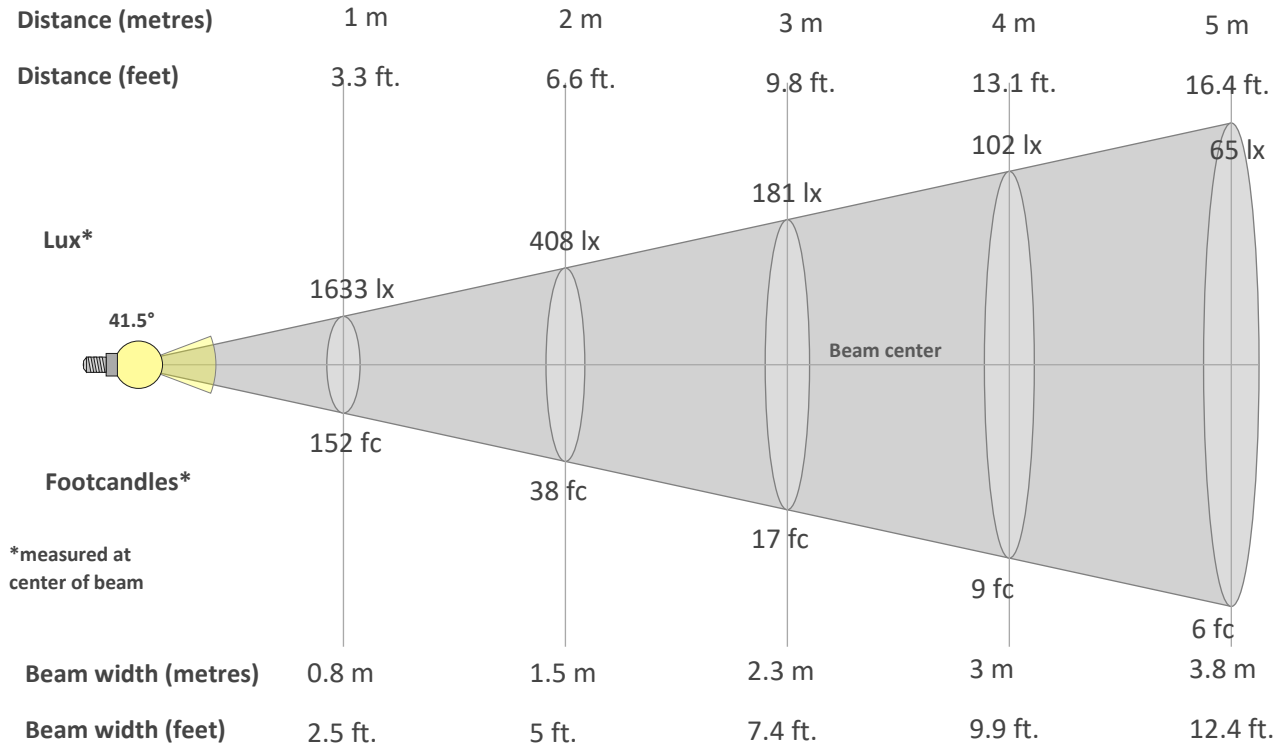

Beam intensity from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1633lx	408lx	181lx	102lx	65lx	45lx	33lx	26lx	20lx	16lx	13lx	11lx	10lx	8lx	7lx	6lx	6lx	5lx	5lx	4lx
151.7fc	37.9fc	16.9fc	9.5fc	6.1fc	4.2fc	3.1fc	2.4fc	1.9fc	1.5fc	1.3fc	1.1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc	0.4fc

Intensity in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1633	1612	1553	1458	1339	1204	1059	908	762	626	502	394	307	239	186	146	117	96	81	70
100%	99%	95%	89%	82%	74%	65%	56%	47%	38%	31%	24%	19%	15%	11%	9%	7%	6%	5%	4%

Intensity in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1633	1626	1608	1580	1545	1503	1456	1404	1347	1286	1218	1145	1064	979	890	799	708	619	533	453
100%	100%	98%	97%	95%	92%	89%	86%	83%	79%	75%	70%	65%	60%	54%	49%	43%	38%	33%	28%

Intensity in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1633	1612	1553	1458	1339	1204	1059	908	762	626	502	394	307	239	186	146	117	96	81	70
100%	99%	95%	89%	82%	74%	65%	56%	47%	38%	31%	24%	19%	15%	11%	9%	7%	6%	5%	4%

Intensity in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1633	1626	1608	1580	1545	1503	1456	1404	1347	1286	1218	1145	1064	979	890	799	708	619	533	453
100%	100%	98%	97%	95%	92%	89%	86%	83%	79%	75%	70%	65%	60%	54%	49%	43%	38%	33%	28%