





PRODUCT INFORMATION

SERIAL NUMBER: LL-20190826-545-BMS

DATE OF MEASUREMENT: 2019-08-26

SIZE (dia. x h): 298 mm x 59.5 mm

ANGULAR DISTRIBUTION AT C0/180 | ANGULAR DISTRIBUTION AT C90/270 | LIGHT OUTPUT DATA

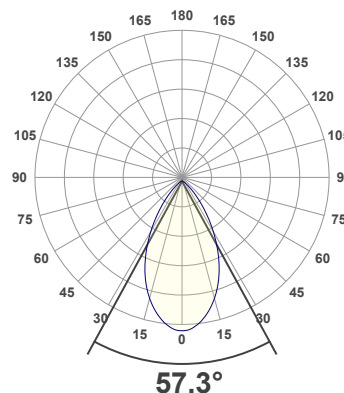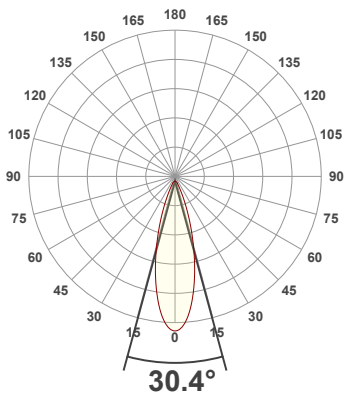


TOTAL LUMEN OUTPUT:	405 lm
EFFICACY:	21 lm/W
PEAK INTENSITY:	666 cd
COLOR RENDERING INDEX (CRI):	N/A
COLOR TEMPERATURE (CCT):	N/A
FIDELITY INDEX (TM30Rf):	N/A
GAMUT INDEX (TM30Rg):	N/A

BEAM OUTPUT DATA

BEAM ANGLE (FWHM) C0/180:	30.4°
BEAM ANGLE (FWHM) C90/270:	57.3°
FIELD ANGLE (10%) C0/180:	57.9°
FIELD ANGLE (10%) C90/270:	95.4°
NUMBER OF PLANES MEASURED:	36


ISOCANDELA DIAGRAM

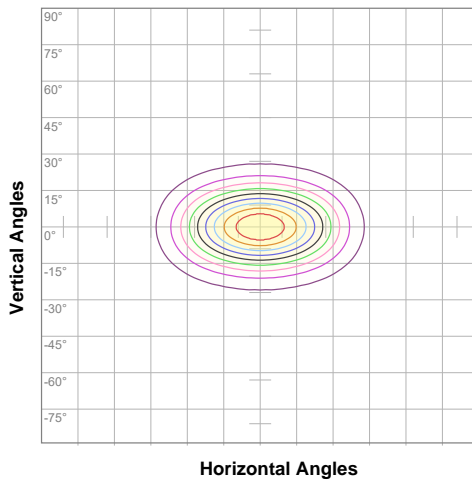


10%	67 cd
20%	133 cd
30%	200 cd
40%	266 cd
50%	333 cd
60%	399 cd
70%	466 cd
80%	532 cd
90%	599 cd

INPUT POWER:	19.2 W
POWER FACTOR:	1.0
OPTICAL POWER:	0.849 mW
PEAK WAVELENGTH:	522 nm
DOMINANT WAVELENGTH:	528 nm


CIE 1931

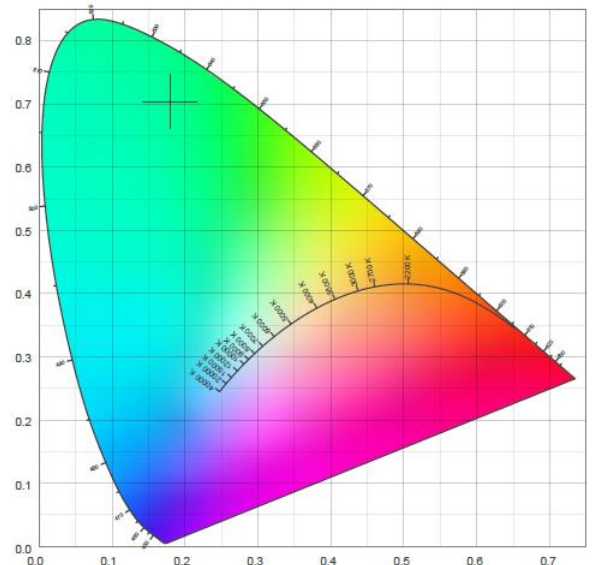


SPECTRAL DISTRIBUTION

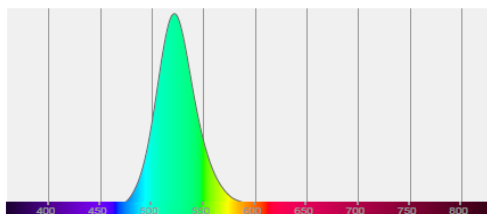

CIE 1931 ZOOM



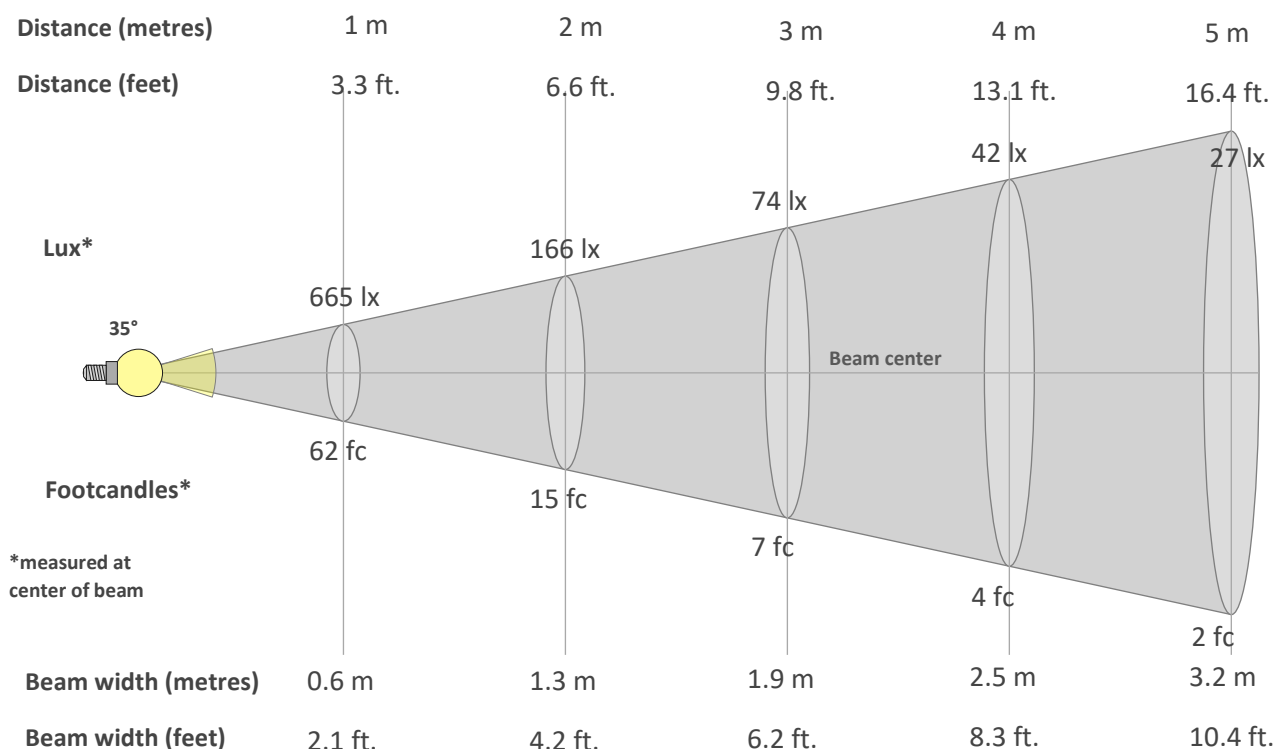BEAM DETAILS

Beam intensity from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
665lx	166lx	74lx	42lx	27lx	18lx	14lx	10lx	8lx	7lx	5lx	5lx	4lx	3lx	3lx	3lx	2lx	2lx	2lx	2lx
61.8fc	15.4fc	6.9fc	3.9fc	2.5fc	1.7fc	1.3fc	1fc	0.8fc	0.6fc	0.5fc	0.4fc	0.4fc	0.3fc	0.3fc	0.2fc	0.2fc	0.2fc	0.2fc	0.2fc

Intensity in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
665	658	633	595	546	490	430	369	309	254	204	161	125	96	75	59	47	38	32	27
100%	99%	95%	89%	82%	74%	65%	55%	47%	38%	31%	24%	19%	14%	11%	9%	7%	6%	5%	4%

Intensity in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
665	662	654	642	627	608	587	563	538	510	480	448	414	379	343	308	272	238	205	173
100%	100%	98%	97%	94%	91%	88%	85%	81%	77%	72%	67%	62%	57%	52%	46%	41%	36%	31%	26%

Intensity in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
665	658	633	595	546	490	430	369	309	254	204	161	125	96	75	59	47	38	32	27
100%	99%	95%	89%	82%	74%	65%	55%	47%	38%	31%	24%	19%	14%	11%	9%	7%	6%	5%	4%

Intensity in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
665	662	654	642	627	608	587	563	538	510	480	448	414	379	343	308	272	238	205	173
100%	100%	98%	97%	94%	91%	88%	85%	81%	77%	72%	67%	62%	57%	52%	46%	41%	36%	31%	26%