

Light efficiency:

34 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:


0 K

Output: 3350 lm

Peak: 54059 cd

Power: 98.4 W

PF: 1.0

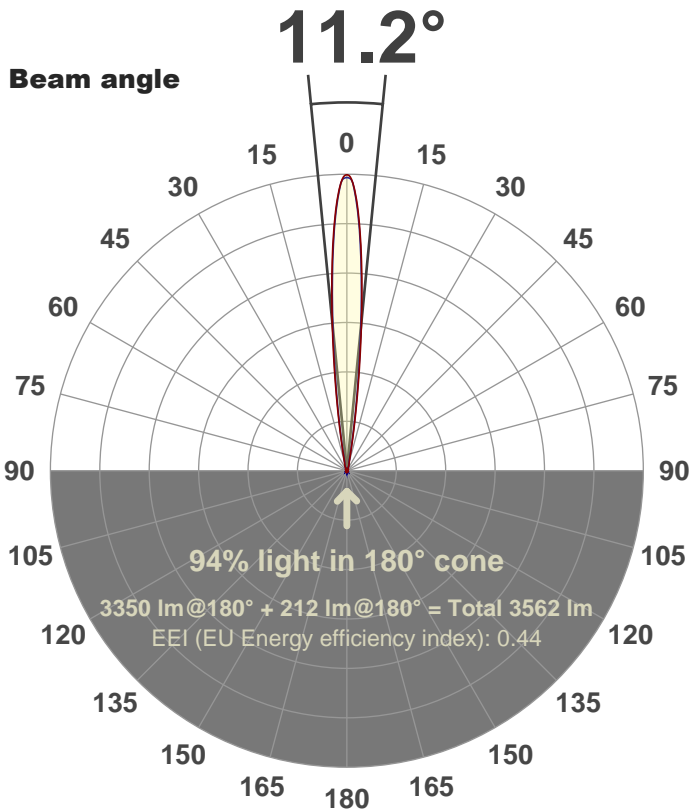

Product name:

FL100-CM-RGBW65K-IM-10-ELV-SM-GREEN

Date and time:

15-May-18 4:15:12 PM

Additional Information:

LED: RGBW

FIXTURE: FL100

FILM: 250219 (10°)

COLOR-AMP: ON

STABILIZED: YES

COLOR (RGBW): GREEN

PERFORMED BY: ABDULLAH QURESHI

Color






CIE 1931

x: 0.158

y: 0.698

Spectra

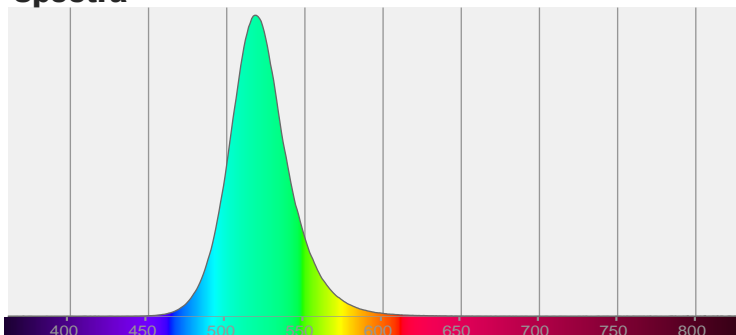

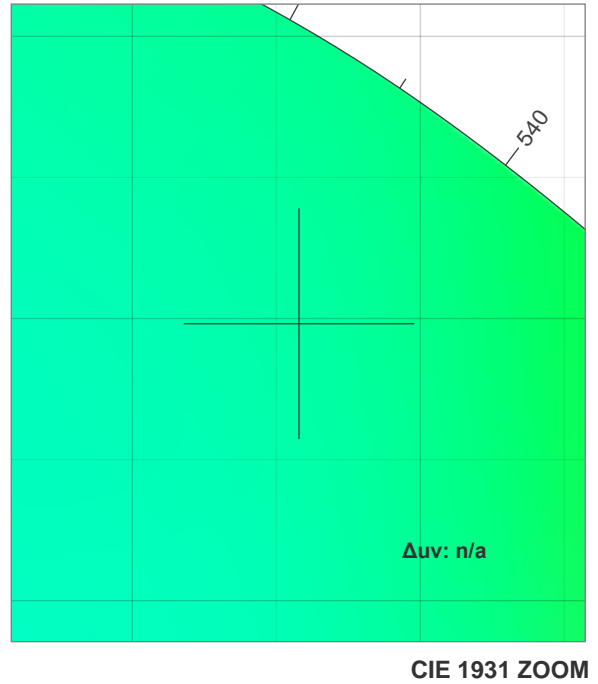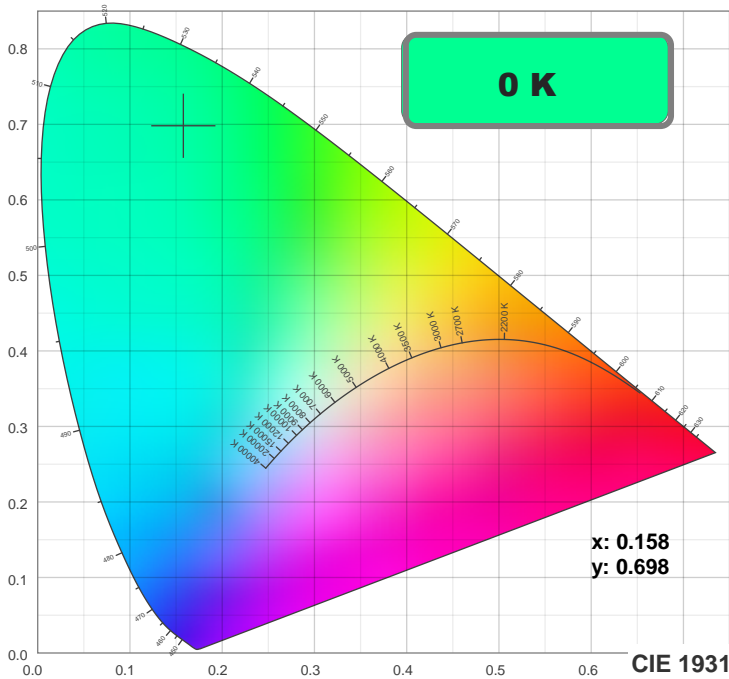

TM30: 0.0

CRI: 0.0 (R1-R8)



CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

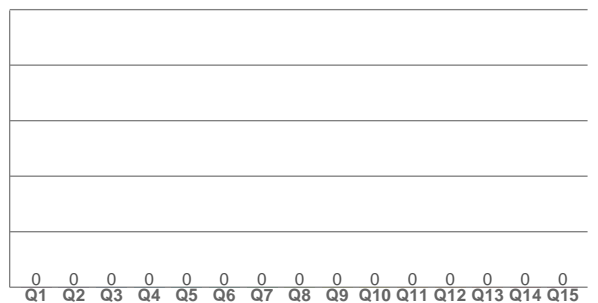

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.158	0.698	0.057	0.379	n/a

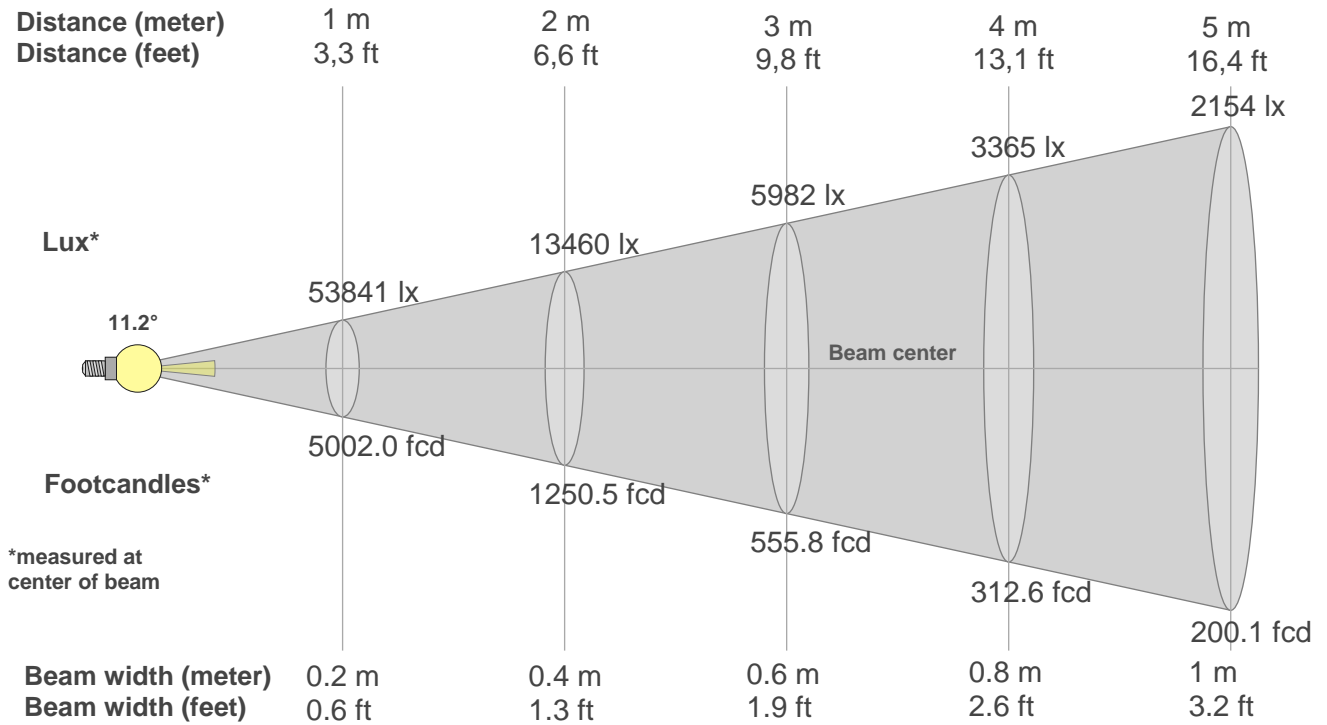

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
53841lx	13460lx	5982lx	3365lx	2154lx	1496lx	1099lx	841lx	665lx	538lx	445lx	374lx	319lx	275lx	239lx	210lx	186lx	166lx	149lx	135lx
5002fcd	1250.5fcd	555.8fcd	312.6fcd	200.1fcd	138.9fcd	102.1fcd	78.2fcd	61.8fcd	50fcd	41.3fcd	34.7fcd	29.6fcd	25.5fcd	22.2fcd	19.5fcd	17.3fcd	15.4fcd	13.9fcd	12.5fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
53.8K	52.9K	49.7K	44.6K	38.4K	31.5K	24.8K	18.8K	13.6K	9.6K	6.6K	4.6K	3.3K	2.5K	2.0K	1.7K	1.5K	1.4K	1.3K	1.2K
100%	98%	92%	83%	71%	59%	46%	35%	25%	18%	12%	9%	6%	5%	4%	3%	3%	3%	2%	2%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
53.8K	52.8K	49.2K	43.9K	37.4K	30.3K	23.4K	17.3K	12.3K	8.4K	5.6K	3.8K	2.7K	2.0K	1.7K	1.5K	1.4K	1.3K	1.2K	1.1K
100%	98%	91%	82%	69%	56%	44%	32%	23%	16%	10%	7%	5%	4%	3%	3%	3%	2%	2%	2%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
53.8K	52.9K	49.7K	44.6K	38.4K	31.5K	24.8K	18.8K	13.6K	9.6K	6.6K	4.6K	3.3K	2.5K	2.0K	1.7K	1.5K	1.4K	1.3K	1.2K
100%	98%	92%	83%	71%	59%	46%	35%	25%	18%	12%	9%	6%	5%	4%	3%	3%	3%	2%	2%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
53.8K	52.8K	49.2K	43.9K	37.4K	30.3K	23.4K	17.3K	12.3K	8.4K	5.6K	3.8K	2.7K	2.0K	1.7K	1.5K	1.4K	1.3K	1.2K	1.1K
100%	98%	91%	82%	69%	56%	44%	32%	23%	16%	10%	7%	5%	4%	3%	3%	3%	2%	2%	2%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
11.2°	20.7°	34.4°	88.2%	85.1%