

Light efficiency:



Light quality:



Color temperature:



Output: 1071 lm

Peak: 3437 cd


Power: 99.2 W

PF: 1.0



24.6°

Beam angle

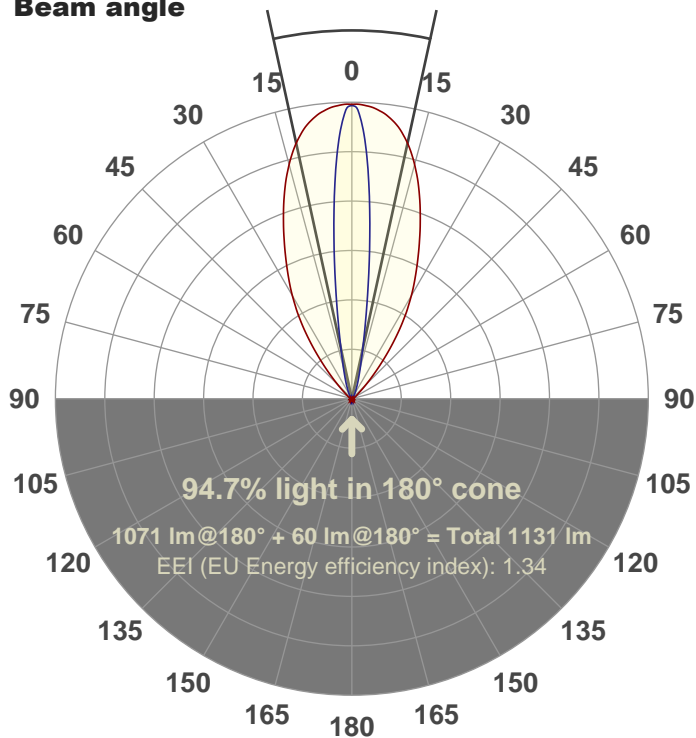

Product name:

FL100-CM-RGBW65K-IM-10X60-ELV-SM-BLUE

Date and time:

06-Jun-18 4:27:35 PM

Additional Information:

LED: RGBW

FIXTURE: FL100

FILM: 250228 (10°X60°)

COLOR-AMP: ON

STABILIZED: YES

COLOR (RGBW): BLUE

FWHM: 13.9°X52.5°

PERFORMED BY: ABDULLAH QURESHI

Color






CIE 1931

x: 0.150

y: 0.030



Spectra

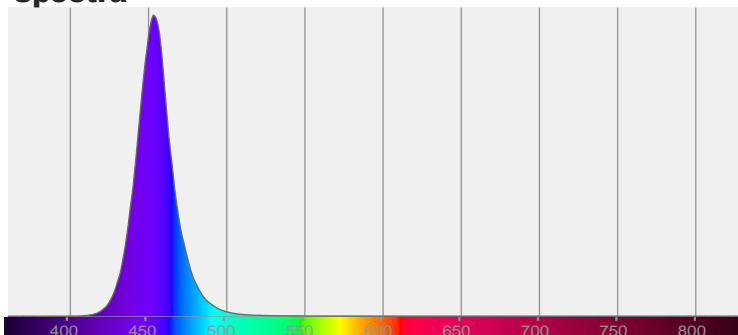

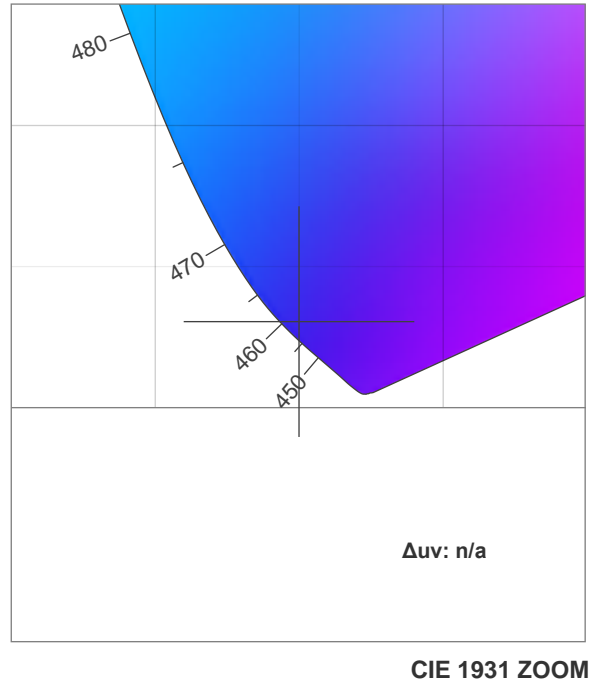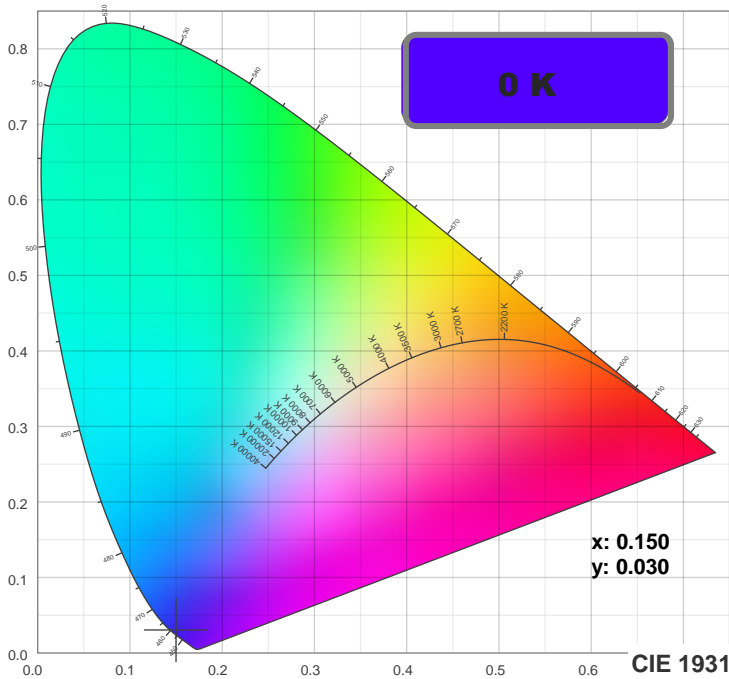

TM30: 0.0

CRI: 0.0 (R1-R8)

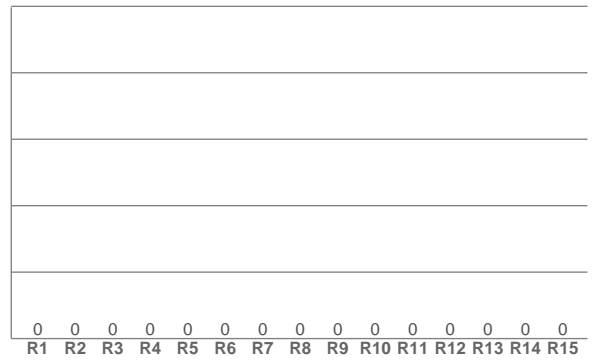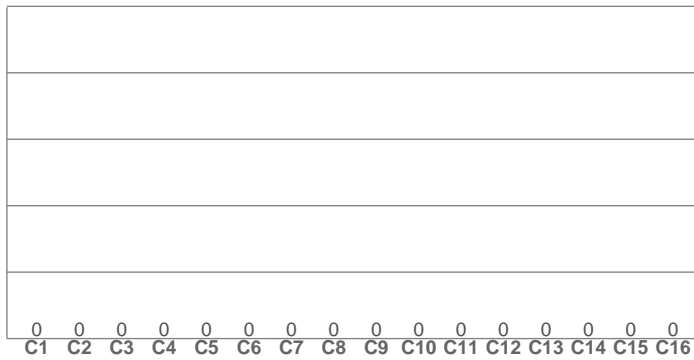

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

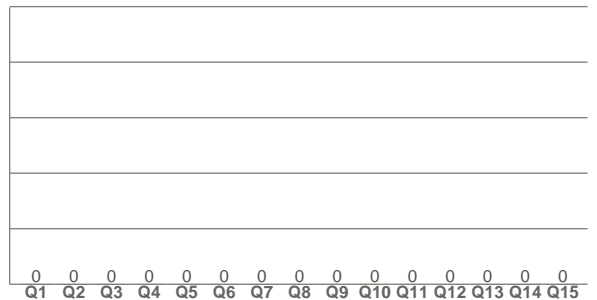

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.150	0.030	0.196	0.060	n/a

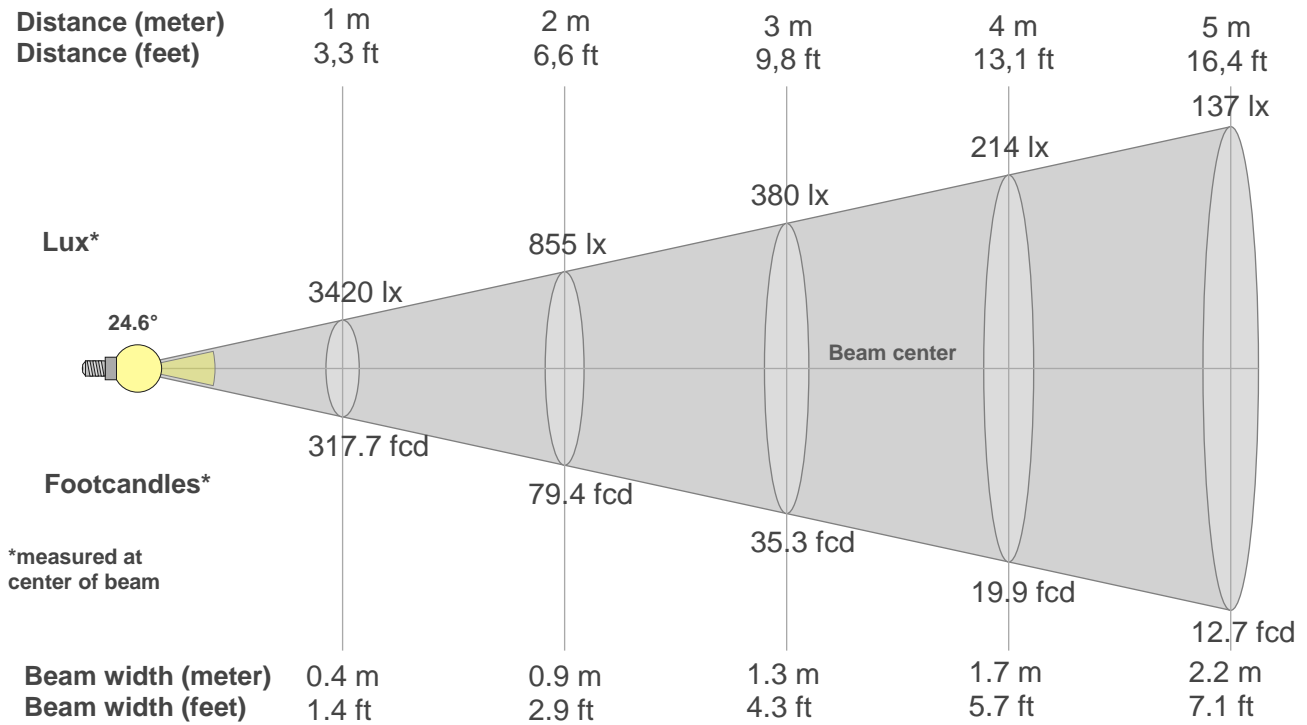

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3420lx	855lx	380lx	214lx	137lx	95lx	70lx	53lx	42lx	34lx	28lx	24lx	20lx	17lx	15lx	13lx	12lx	11lx	9lx	9lx
317.7fcd	79.4fcd	35.3fcd	19.9fcd	12.7fcd	8.8fcd	6.5fcd	5fcd	3.9fcd	3.2fcd	2.6fcd	2.2fcd	1.9fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	1fcd	0.9fcd	0.8fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3420	3430	3407	3362	3293	3199	3071	2915	2735	2539	2331	2125	1925	1736	1560	1387	1213	1029	842	666
100%	100%	100%	98%	96%	94%	90%	85%	80%	74%	68%	62%	56%	51%	46%	41%	35%	30%	25%	19%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3420	3220	2683	2007	1388	922	626	447	335	256	199	155	123	98	80	65	55	47	42	37
100%	94%	78%	59%	41%	27%	18%	13%	10%	7%	6%	5%	4%	3%	2%	2%	2%	1%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3420	3430	3407	3362	3293	3199	3071	2915	2735	2539	2331	2125	1925	1736	1560	1387	1213	1029	842	666
100%	100%	100%	98%	96%	94%	90%	85%	80%	74%	68%	62%	56%	51%	46%	41%	35%	30%	25%	19%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3420	3220	2683	2007	1388	922	626	447	335	256	199	155	123	98	80	65	55	47	42	37
100%	94%	78%	59%	41%	27%	18%	13%	10%	7%	6%	5%	4%	3%	2%	2%	2%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
24.6°	48.5°	74.8°	89.3%	84.2%