

**Light efficiency:**

**34 Lumen/Watt**

**Light quality:**

**CRI: 0.0**

**Color temperature:**

**0 K**

**Output: 3307 lm**

**Peak: 15421 cd**


**Power: 98.4 W**

**PF: 1.0**



**21.8°**

**Beam angle**

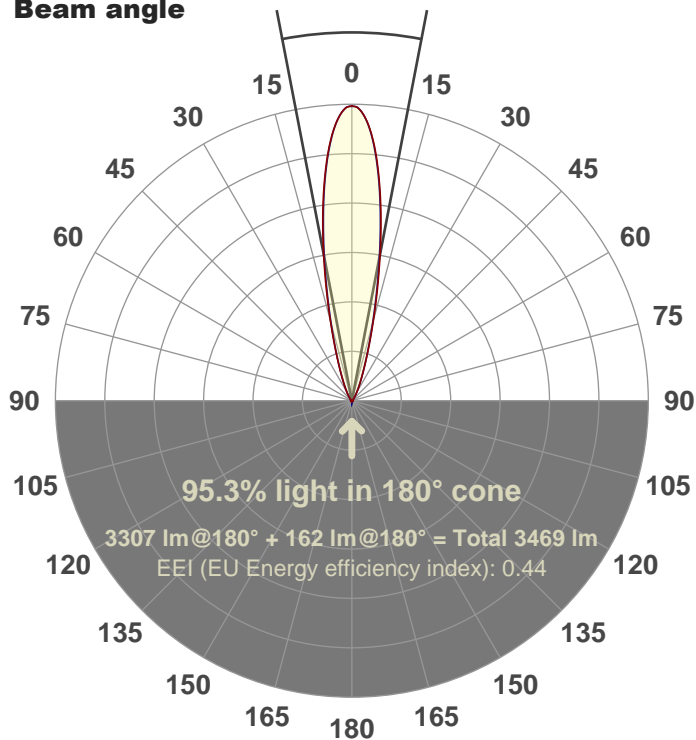

**Product name:**

**FL100-CM-RGBW65K-IM-20-ELV-SM-GREEN**

**Date and time:**

**12-Jun-18 1:50:14 PM**

**Additional Information:**

**LED: RGBW**

**FIXTURE: FL100**

**FILM: 250241 (20°)**

**COLOR-AMP: ON**

**STABILIZED: YES**

**COLOR (RGBW): GREEN**

**PERFORMED BY: ABDULLAH QURESHI**

**Color**






**CIE 1931**

**x: 0.157**

**y: 0.698**



**Spectra**

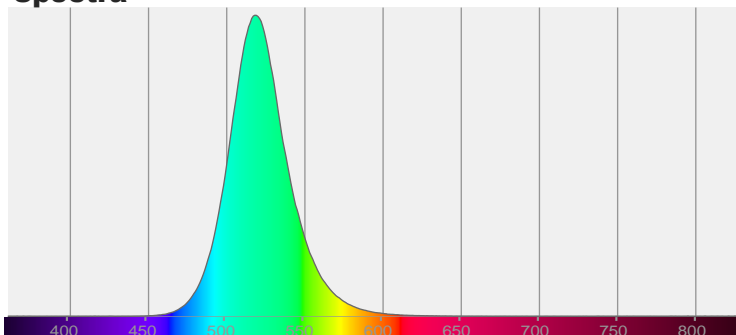

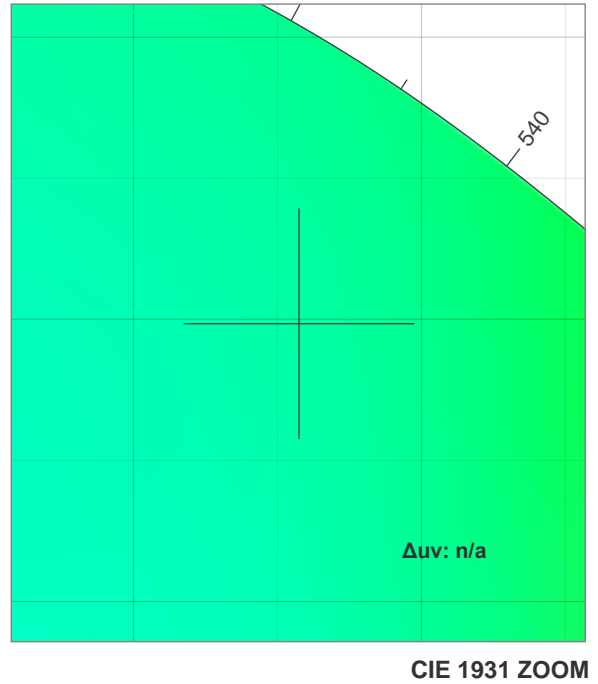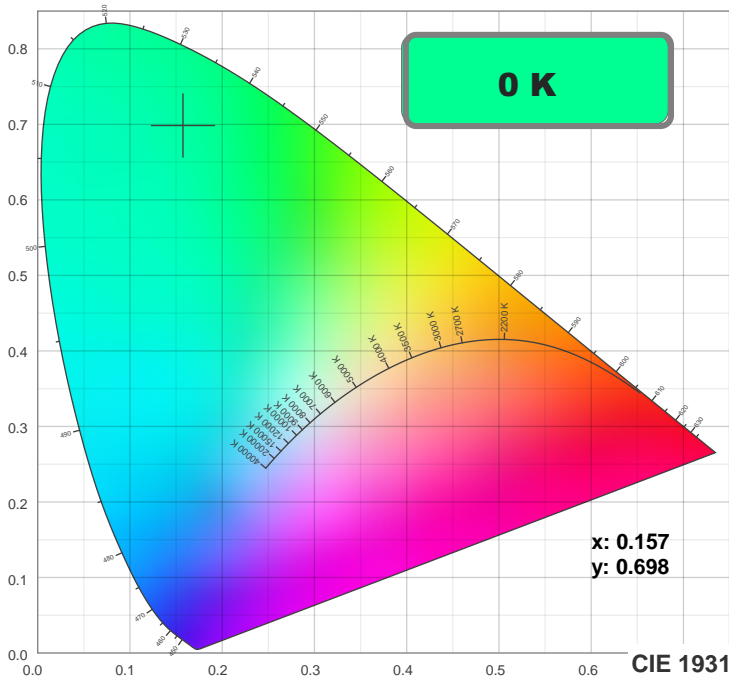

**TM30: 0.0**

**CRI: 0.0 (R1-R8)**

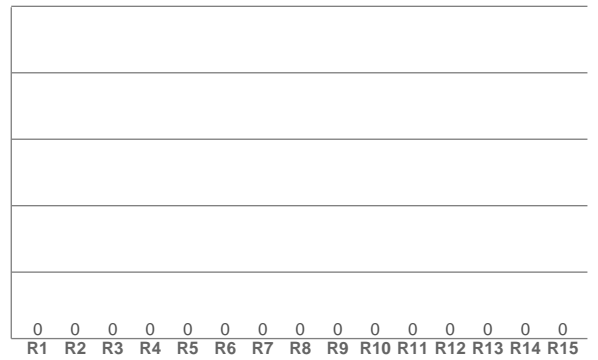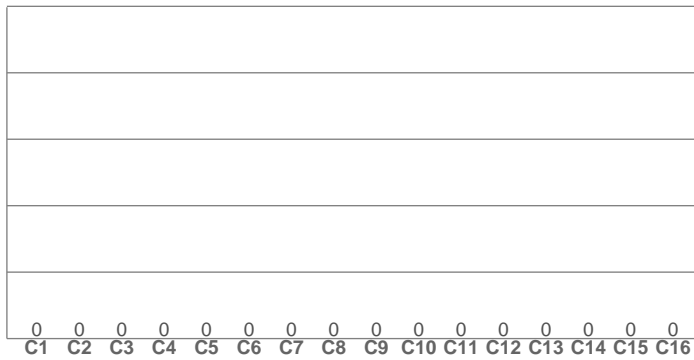

**CRI R values, only R1-R8 are used to calculate final CRI value**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


**TM30 C values, 16 binned values out of total of 99 C values**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS Q values**


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS: 0.0**

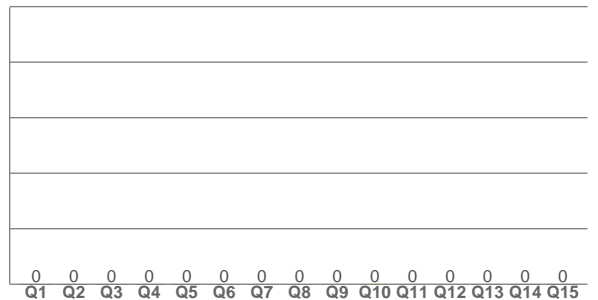

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
0 K	0.0	0.0	0.0	0.0	0.0	0.157	0.698	0.057	0.379	n/a

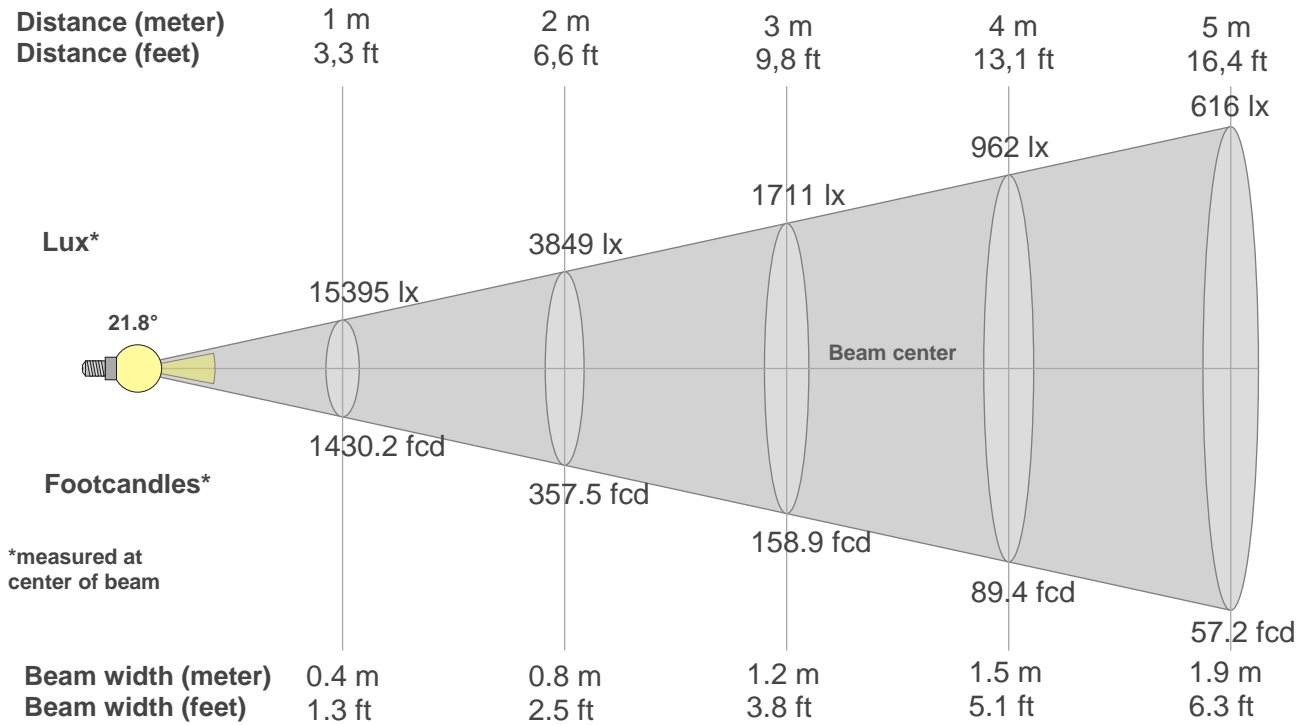

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
15395lx	3849lx	1711lx	962lx	616lx	428lx	314lx	241lx	190lx	154lx	127lx	107lx	91lx	79lx	68lx	60lx	53lx	48lx	43lx	38lx
1430.2fcd	357.5fcd	158.9fcd	89.4fcd	57.2fcd	39.7fcd	29.2fcd	22.3fcd	17.7fcd	14.3fcd	11.8fcd	9.9fcd	8.5fcd	7.3fcd	6.4fcd	5.6fcd	4.9fcd	4.4fcd	4fcd	3.6fcd

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
15.4K	15.1K	14.1K	12.6K	10.7K	8.7K	6.8K	5.1K	3.7K	2.7K	2.0K	1.5K	1.1K	0.9K	0.7K	0.5K	0.4K	0.3K	0.3K	0.2K
100%	98%	92%	82%	70%	56%	44%	33%	24%	18%	13%	10%	7%	6%	4%	3%	3%	2%	2%	1%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
15.4K	15.1K	14.0K	12.5K	10.6K	8.5K	6.5K	4.9K	3.6K	2.6K	1.9K	1.5K	1.1K	0.8K	0.6K	0.5K	0.4K	0.3K	0.2K	0.2K
100%	98%	91%	81%	69%	55%	43%	32%	23%	17%	13%	9%	7%	5%	4%	3%	2%	2%	2%	1%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
15.4K	15.1K	14.1K	12.6K	10.7K	8.7K	6.8K	5.1K	3.7K	2.7K	2.0K	1.5K	1.1K	0.9K	0.7K	0.5K	0.4K	0.3K	0.3K	0.2K
100%	98%	92%	82%	70%	56%	44%	33%	24%	18%	13%	10%	7%	6%	4%	3%	3%	2%	2%	1%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
15.4K	15.1K	14.0K	12.5K	10.6K	8.5K	6.5K	4.9K	3.6K	2.6K	1.9K	1.5K	1.1K	0.8K	0.6K	0.5K	0.4K	0.3K	0.2K	0.2K
100%	98%	91%	81%	69%	55%	43%	32%	23%	17%	13%	9%	7%	5%	4%	3%	2%	2%	2%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
21.8°	43.2°	64°	90.3%	86.9%