

Light efficiency:

33 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 3200 lm

Peak: 2939 cd


Power: 98.4 W

PF: 1.0



55.8°

Beam angle

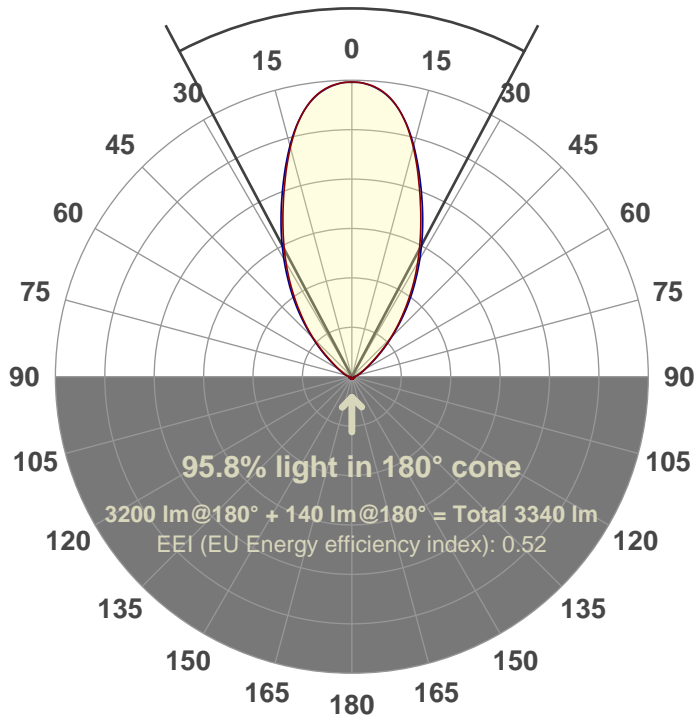

Product name:

FL100-CM-RGBW65K-IM-55-ELV-SM-GREEN

Date and time:

06-Jun-18 9:51:47 AM

Additional Information:

LED: RGBW

FIXTURE: FL100

FILM: 250244 (55°)

COLOR-AMP: ON

STABILIZED: YES

COLOR (RGBW): GREEN

PERFORMED BY: ABDULLAH QURESHI

Color






CIE 1931

x: 0.158

y: 0.698



Spectra

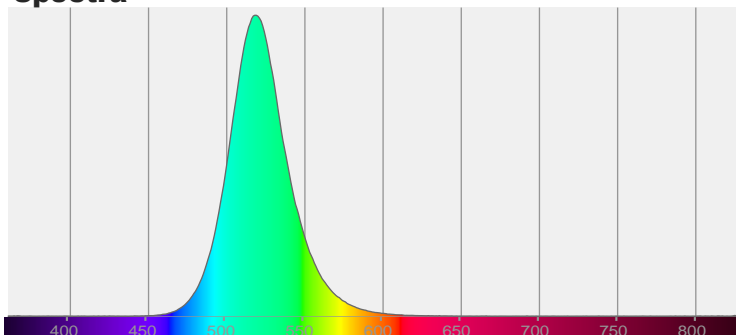

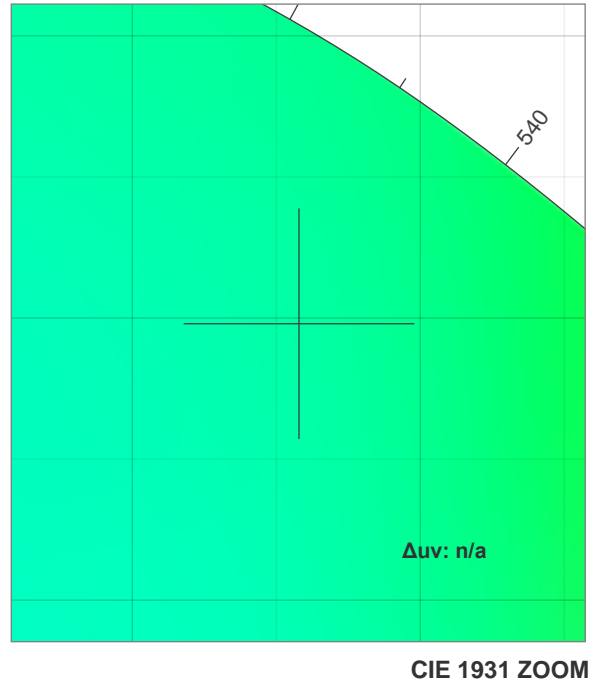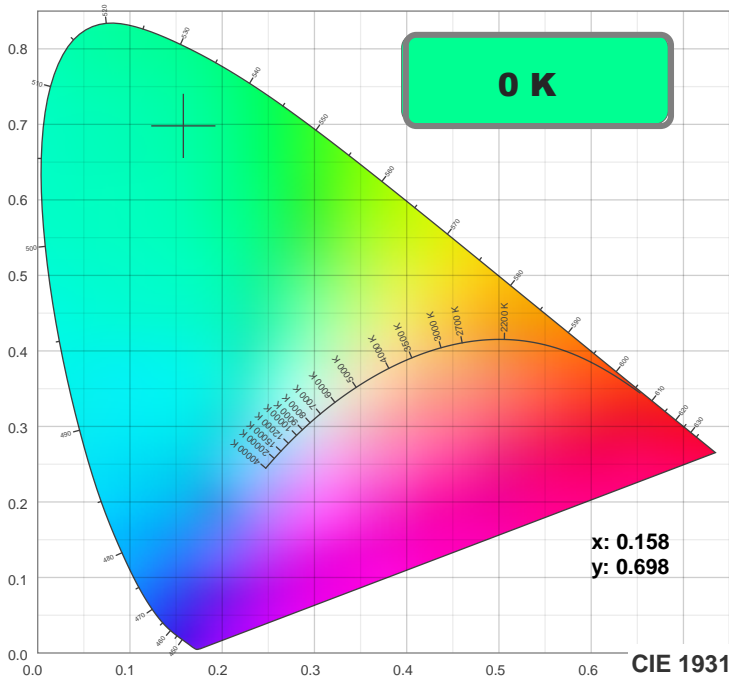

TM30: 0.0

CRI: 0.0 (R1-R8)

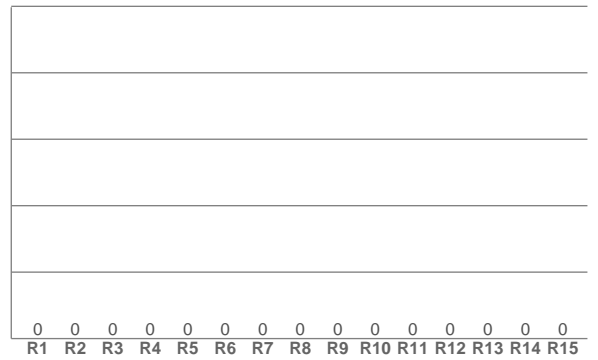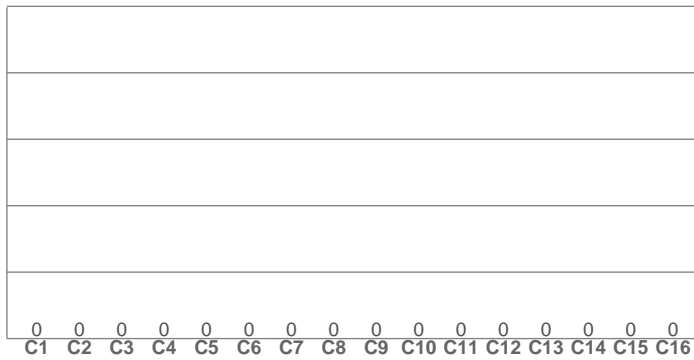

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

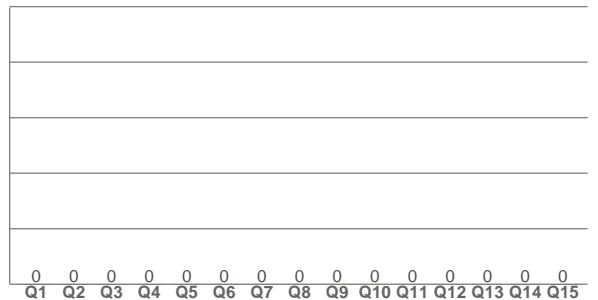

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.158	0.698	0.057	0.379	n/a

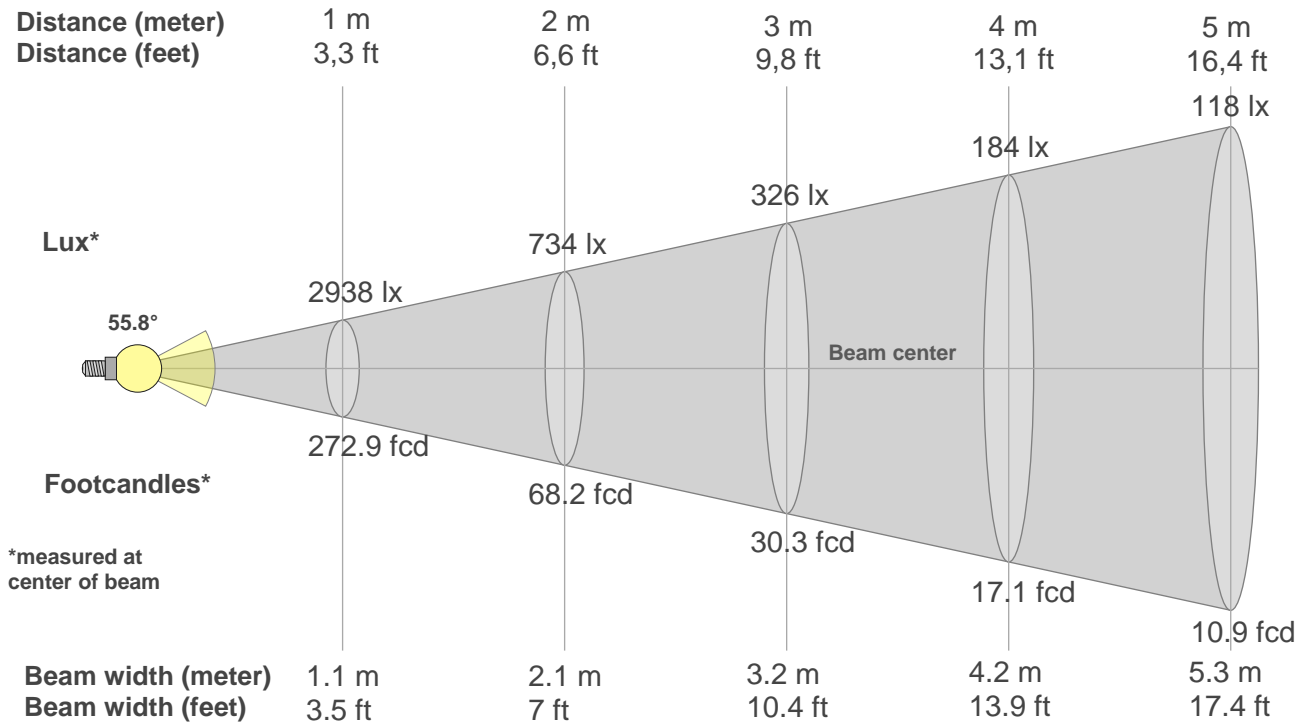

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2938lx	734lx	326lx	184lx	118lx	82lx	60lx	46lx	36lx	29lx	24lx	20lx	17lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx
272.9fcd	68.2fcd	30.3fcd	17.1fcd	10.9fcd	7.6fcd	5.6fcd	4.3fcd	3.4fcd	2.7fcd	2.3fcd	1.9fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.8fcd	0.7fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2938	2890	2705	2369	1976	1625	1313	1026	769	546	352	223	151	109	80	59	42	29	24	0
100%	98%	92%	81%	67%	55%	45%	35%	26%	19%	12%	8%	5%	4%	3%	2%	1%	1%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2938	2884	2704	2385	2014	1671	1356	1066	800	563	375	239	158	113	82	60	43	29	24	0
100%	98%	92%	81%	69%	57%	46%	36%	27%	19%	13%	8%	5%	4%	3%	2%	1%	1%	1%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2938	2890	2705	2369	1976	1625	1313	1026	769	546	352	223	151	109	80	59	42	29	24	0
100%	98%	92%	81%	67%	55%	45%	35%	26%	19%	12%	8%	5%	4%	3%	2%	1%	1%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2938	2884	2704	2385	2014	1671	1356	1066	800	563	375	239	158	113	82	60	43	29	24	0
100%	98%	92%	81%	69%	57%	46%	36%	27%	19%	13%	8%	5%	4%	3%	2%	1%	1%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
55.8°	104.7°	143.6°	89.5%	77.6%