


Light efficiency:



Light quality:



Color temperature:




Output: 1868 lm

Peak: 30033 cd

Power: 205 W

PF: 1.0

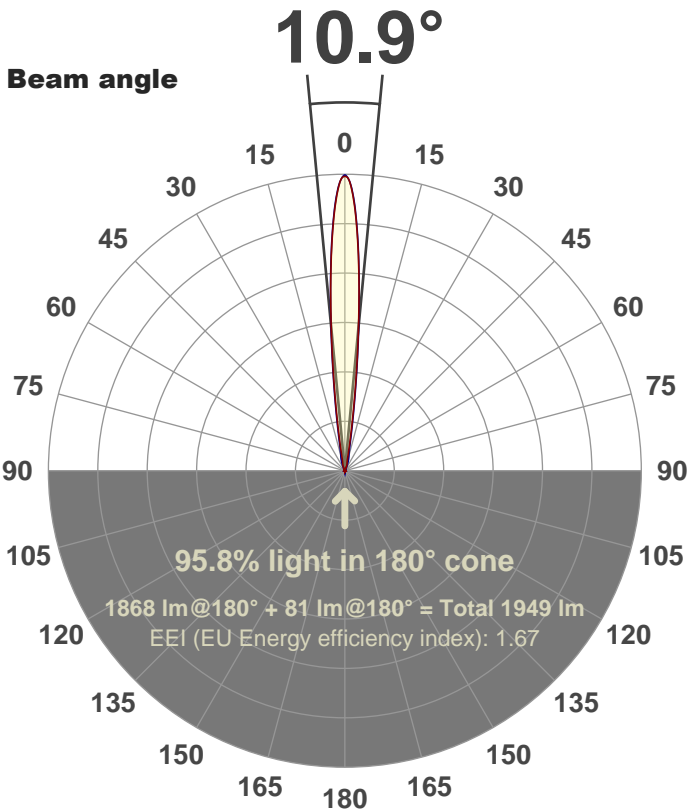

Product name:

FL200-CM-RGBW-IM-10-ELV-SM-BLUE

Date and time:

27-Aug-18 4:55:38 PM

Additional Information:

LED: RGBW

FIXTURE: FL200

FILM: 250270 (10°)

COLOR-AMP: ON

STABILIZED: YES

COLOR (RGBW): BLUE

PERFORMED BY: ABDULLAH QURESHI

Color






CIE 1931

x: 0.150

y: 0.029



Spectra

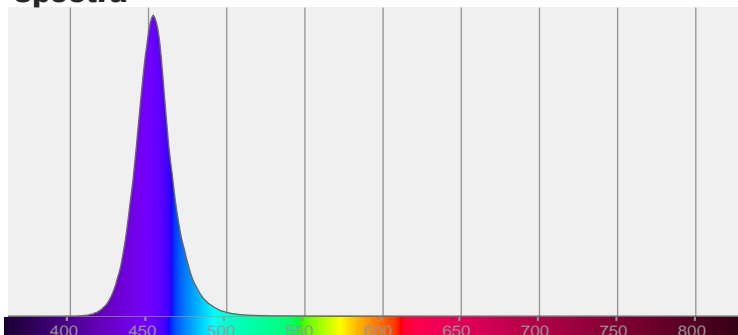

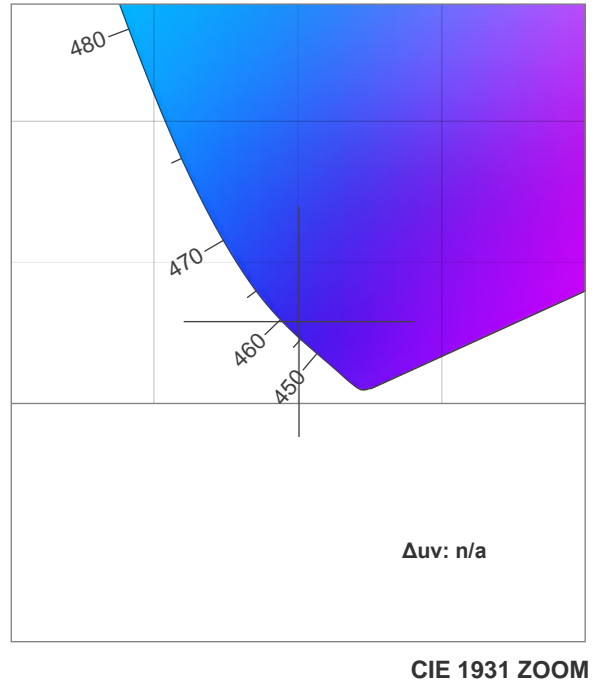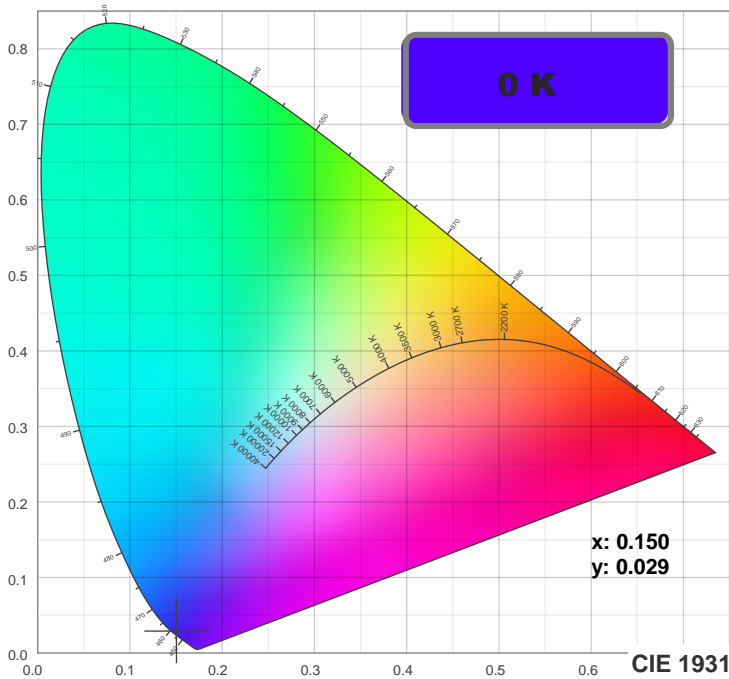

TM30: 0.0

CRI: 0.0 (R1-R8)

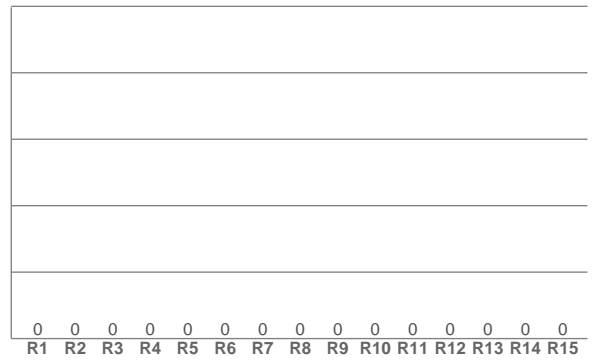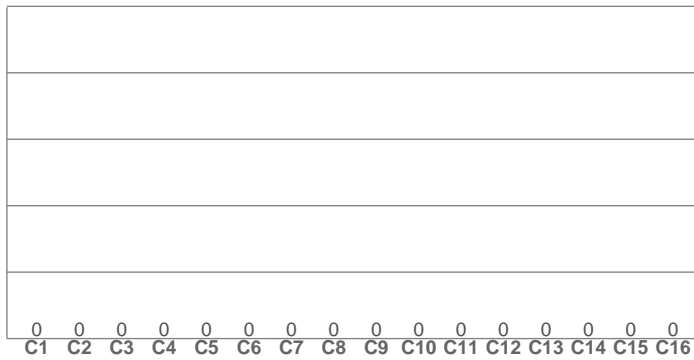

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

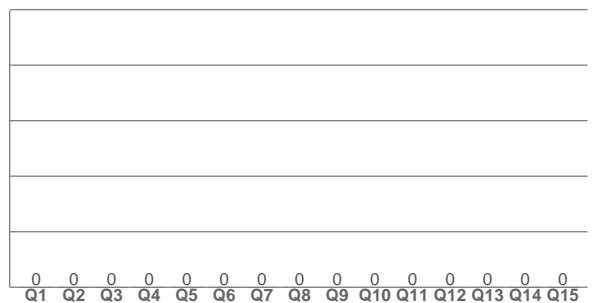

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.150	0.029	0.197	0.057	n/a

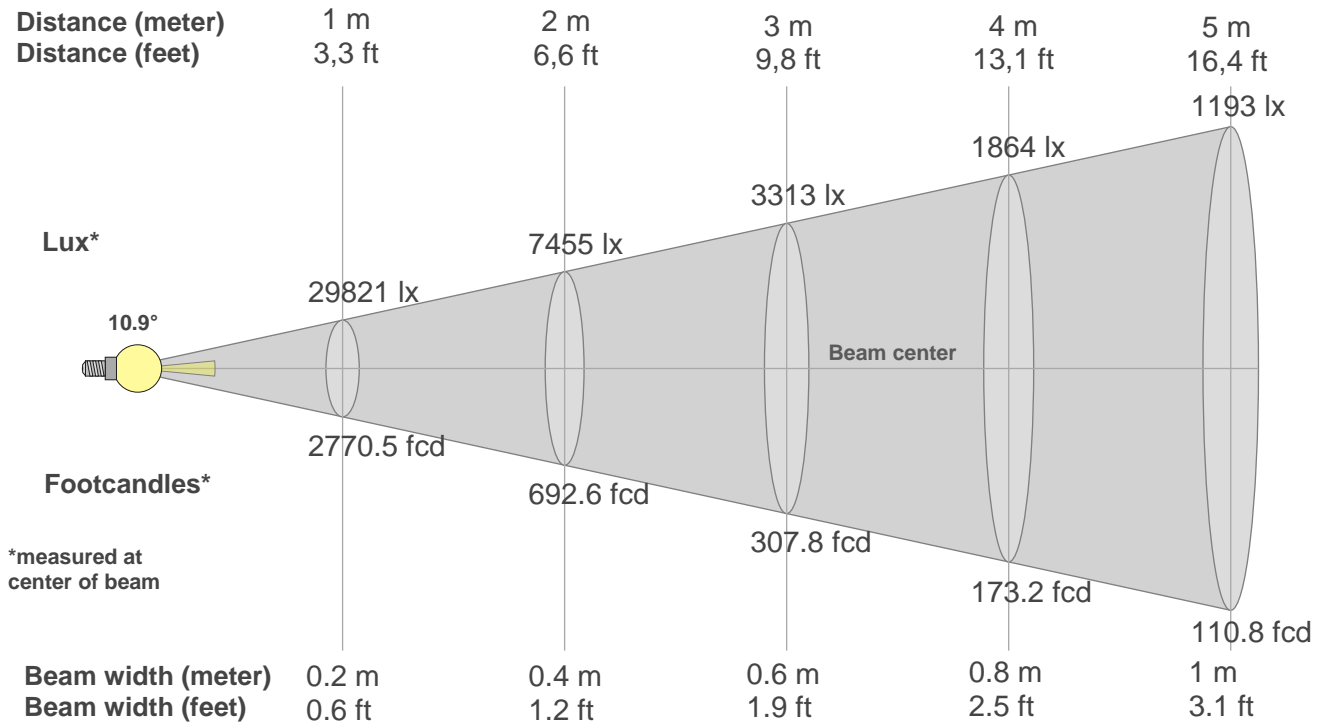

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
29821lx	7455lx	3313lx	1864lx	1193lx	828lx	609lx	466lx	368lx	298lx	246lx	207lx	176lx	152lx	133lx	116lx	103lx	92lx	83lx	75lx
2770.5fcd	692.6fcd	307.8fcd	173.2fcd	110.8fcd	77fcd	56.5fcd	43.3fcd	34.2fcd	27.7fcd	22.9fcd	19.2fcd	16.4fcd	14.1fcd	12.3fcd	10.8fcd	9.6fcd	8.6fcd	7.7fcd	6.9fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.8K	29.2K	27.2K	24.1K	20.4K	16.4K	12.6K	9.2K	6.4K	4.3K	2.9K	2.0K	1.5K	1.1K	1.0K	0.9K	0.8K	0.7K	0.7K	0.6K
100%	98%	91%	81%	68%	55%	42%	31%	22%	14%	10%	7%	5%	4%	3%	3%	3%	3%	2%	2%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.8K	29.3K	27.4K	24.3K	20.6K	16.6K	12.9K	9.7K	7.0K	5.1K	3.8K	2.9K	2.3K	2.0K	1.7K	1.6K	1.5K	1.3K	1.2K	1.1K
100%	98%	92%	82%	69%	56%	43%	32%	24%	17%	13%	10%	8%	7%	6%	5%	5%	5%	4%	4%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.8K	29.2K	27.2K	24.1K	20.4K	16.4K	12.6K	9.2K	6.4K	4.3K	2.9K	2.0K	1.5K	1.1K	1.0K	0.9K	0.8K	0.7K	0.7K	0.6K
100%	98%	91%	81%	68%	55%	42%	31%	22%	14%	10%	7%	5%	4%	3%	3%	3%	3%	2%	2%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.8K	29.3K	27.4K	24.3K	20.6K	16.6K	12.9K	9.7K	7.0K	5.1K	3.8K	2.9K	2.3K	2.0K	1.7K	1.6K	1.5K	1.3K	1.2K	1.1K
100%	98%	92%	82%	69%	56%	43%	32%	24%	17%	13%	10%	8%	7%	6%	5%	5%	5%	4%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
10.9°	20.4°	37.1°	89.4%	85.6%