

**Light efficiency:**

**9 Lumen/Watt**

**Light quality:**

**CRI: 0.0**

**Color temperature:**


**0 K**

**Output: 1837 lm**

**Peak: 11470 cd**

**Power: 206 W**

**PF: 1.0**

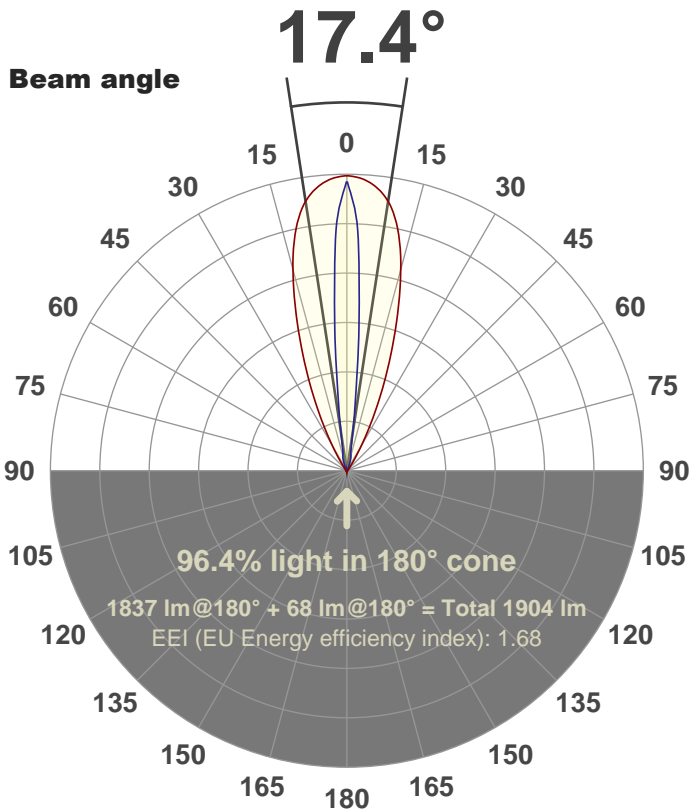

**Color**



**CIE 1931**  
**x: 0.704**  
**y: 0.295**

**Product name:**

**FL200-CM-RGBW-IM-10X40-ELV-SM-RED**

**Date and time:**

**27-Aug-18 5:33:22 PM**

**Additional Information:**

**LED: RGBW**

**FIXTURE: FL200**

**FILM: 250283 (1°X40°)**

**COLOR-AMP: ON**


**STABILIZED: YES**



**COLOR (RGBW): RED**

**FWHM: 9.8°X38.3°**

**PERFORMED BY: ABDULLAH QURESHI**


**Spectra**

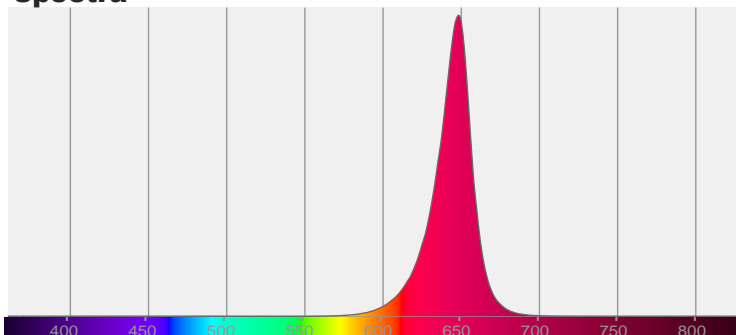

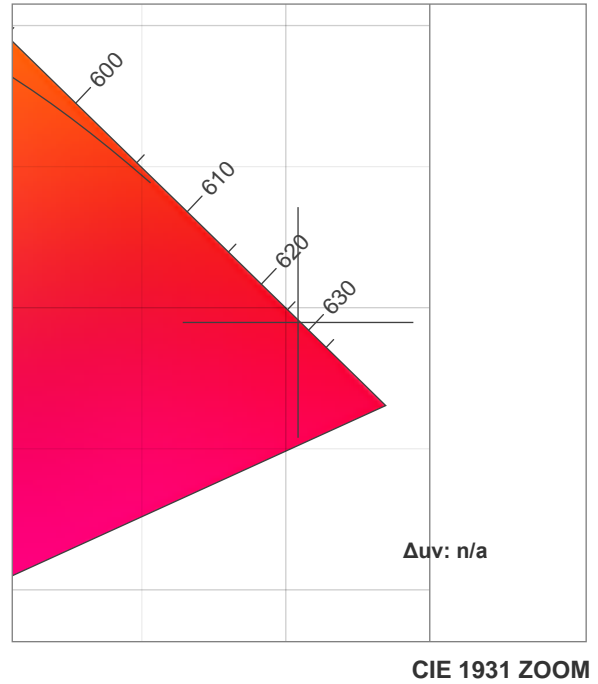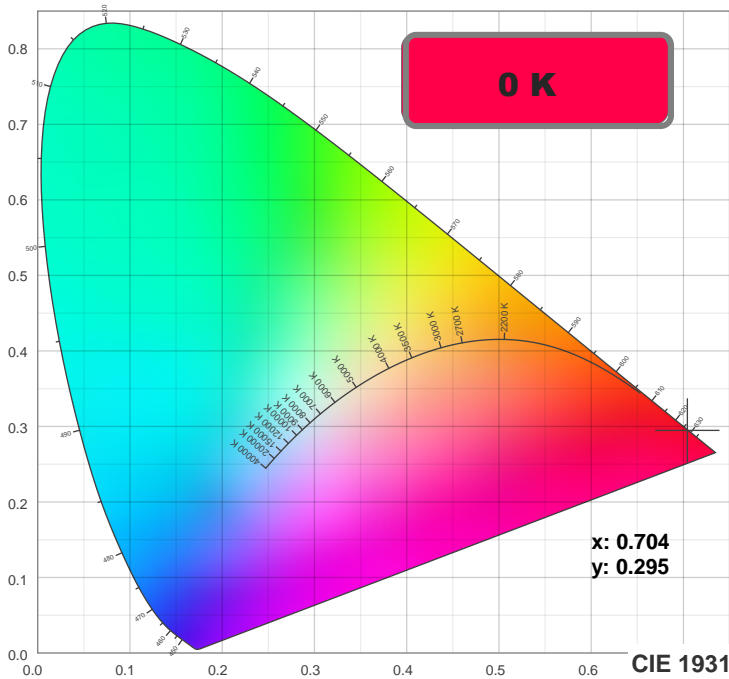

**TM30: 0.0**

**CRI: 0.0 (R1-R8)**

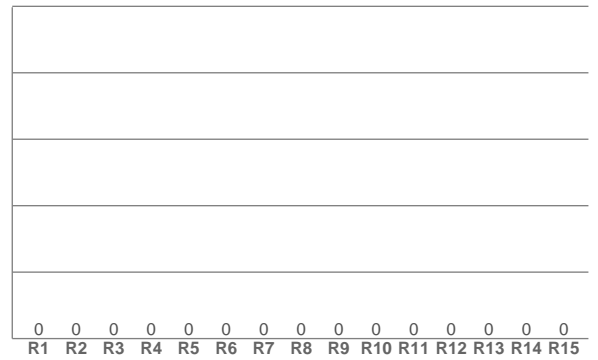

**CRI R values, only R1-R8 are used to calculate final CRI value**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


**TM30 C values, 16 binned values out of total of 99 C values**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS Q values**


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS: 0.0**

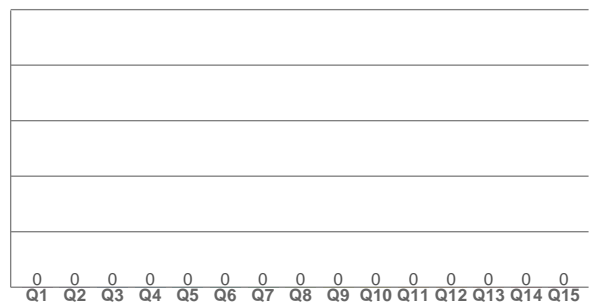

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.704	0.295	0.549	0.345	n/a

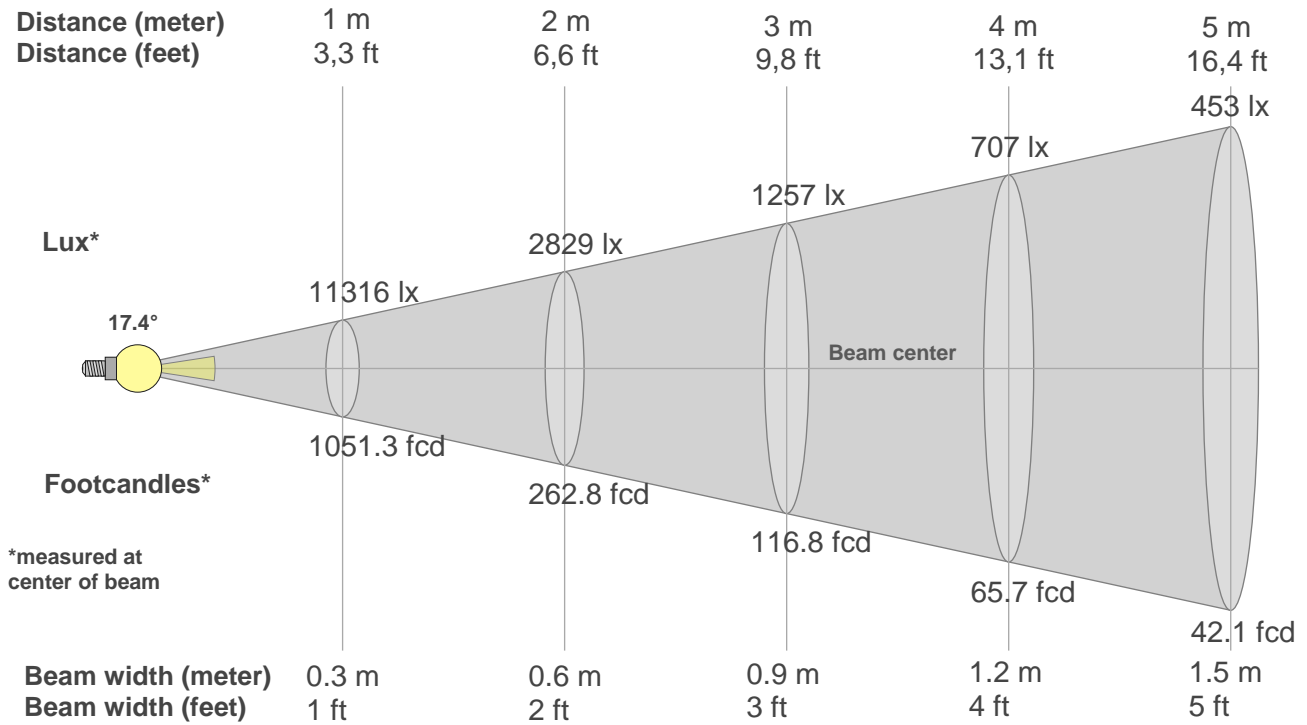

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
11316lx	2829lx	1257lx	707lx	453lx	314lx	231lx	177lx	140lx	113lx	94lx	79lx	67lx	58lx	50lx	44lx	39lx	35lx	31lx	28lx
1051.3fcd	262.8fcd	116.8fcd	65.7fcd	42.1fcd	29.2fcd	21.5fcd	16.4fcd	13fcd	10.5fcd	8.7fcd	7.3fcd	6.2fcd	5.4fcd	4.7fcd	4.1fcd	3.6fcd	3.2fcd	2.9fcd	2.6fcd

### Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
11.3K	11.5K	11.4K	11.4K	11.3K	11.2K	11.1K	10.9K	10.7K	10.5K	10.3K	9.9K	9.6K	9.1K	8.6K	8.1K	7.5K	7.0K	6.4K	5.8K
100%	101%	101%	101%	100%	99%	98%	97%	95%	93%	91%	88%	84%	80%	76%	72%	67%	62%	56%	51%

### Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
11.3K	10.6K	9.8K	8.7K	7.0K	5.4K	4.0K	2.7K	2.0K	1.4K	1.1K	0.9K	0.8K	0.7K	0.6K	0.6K	0.6K	0.5K	0.5K	0.4K
100%	93%	87%	77%	62%	47%	36%	24%	18%	12%	10%	8%	7%	6%	6%	5%	5%	5%	4%	4%

### Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
11.3K	11.5K	11.4K	11.4K	11.3K	11.2K	11.1K	10.9K	10.7K	10.5K	10.3K	9.9K	9.6K	9.1K	8.6K	8.1K	7.5K	7.0K	6.4K	5.8K
100%	101%	101%	101%	100%	99%	98%	97%	95%	93%	91%	88%	84%	80%	76%	72%	67%	62%	56%	51%

### Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
11.3K	10.6K	9.8K	8.7K	7.0K	5.4K	4.0K	2.7K	2.0K	1.4K	1.1K	0.9K	0.8K	0.7K	0.6K	0.6K	0.6K	0.5K	0.5K	0.4K
100%	93%	87%	77%	62%	47%	36%	24%	18%	12%	10%	8%	7%	6%	6%	5%	5%	5%	4%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
17.4°	31.9°	55.1°	91.5%	88.0%