

Light efficiency:

9 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 1748 lm

Peak: 2577 cd


Power: 204 W

PF: 1.0



43.2°

Beam angle

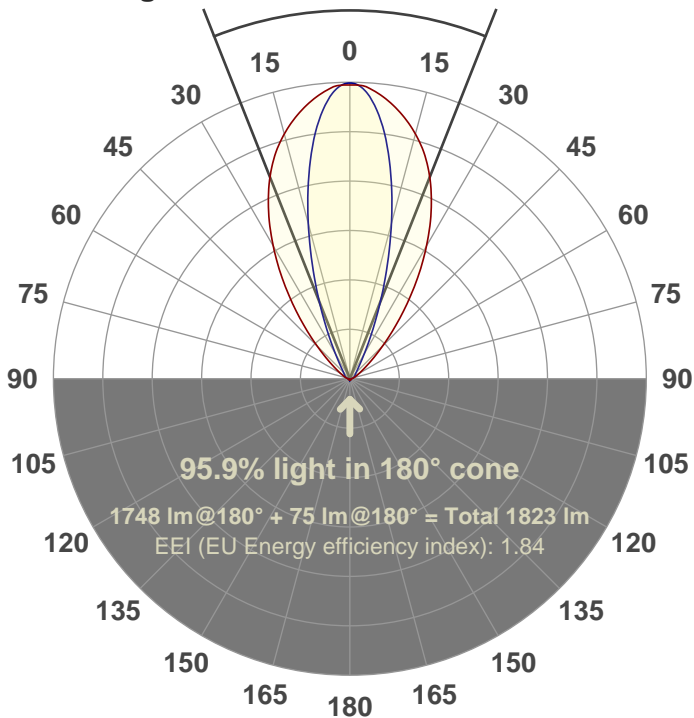

Color



CIE 1931
x: 0.150
y: 0.029

Product name:

FL200-CM-RGBW-IM-30X60-ELV-SM-BLUE

Date and time:

24-Aug-18 4:28:41 PM

Additional Information:

LED: RGBW

FIXTURE: FL200

FILM: 250281 (30°X60°)

COLOR-AMP: ON


STABILIZED: YES



COLOR (RGBW): BLUE

FWHM: 32.1°X61.6°

PERFORMED BY: ABDULLAH QURESHI



Spectra

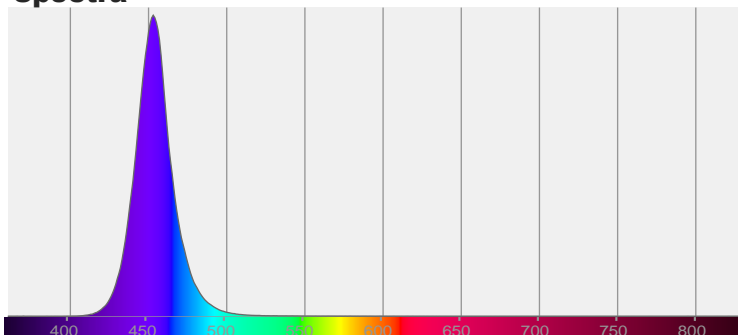

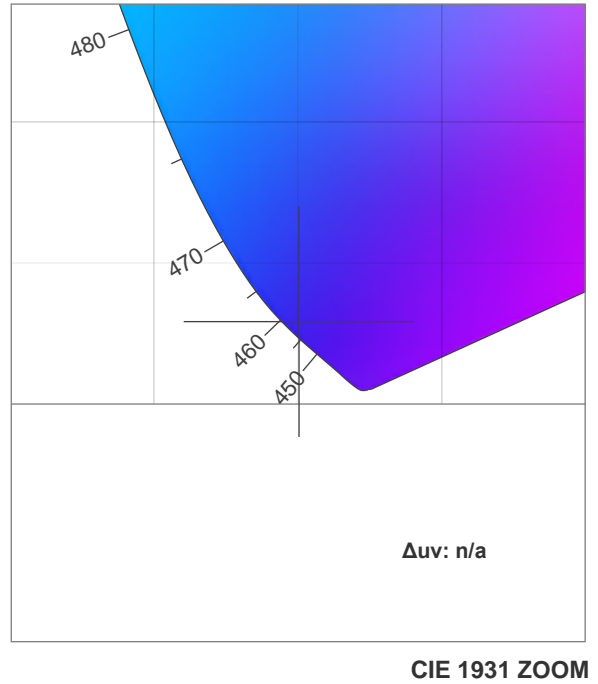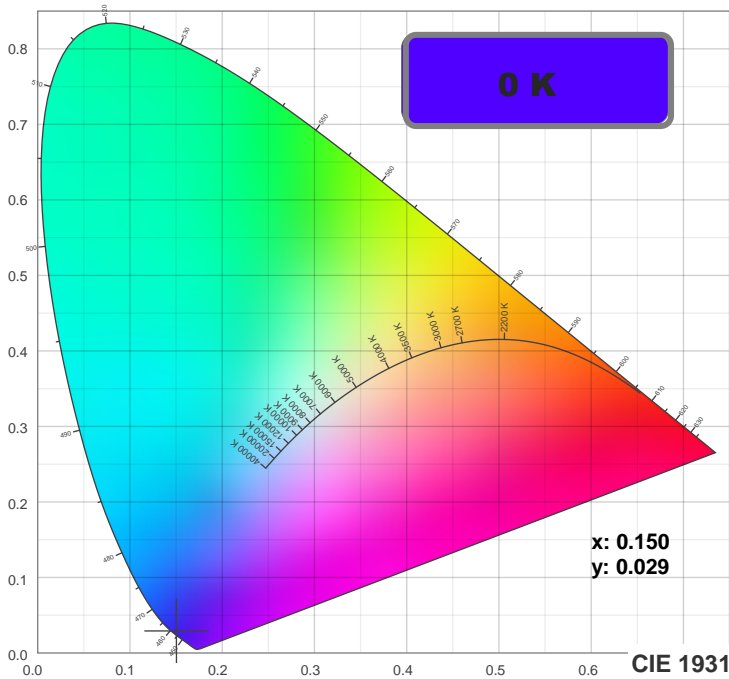

TM30: 0.0

CRI: 0.0 (R1-R8)

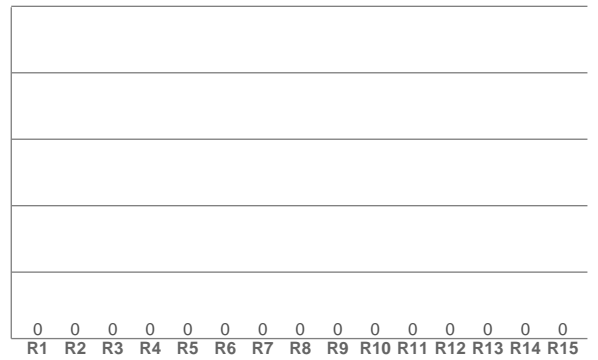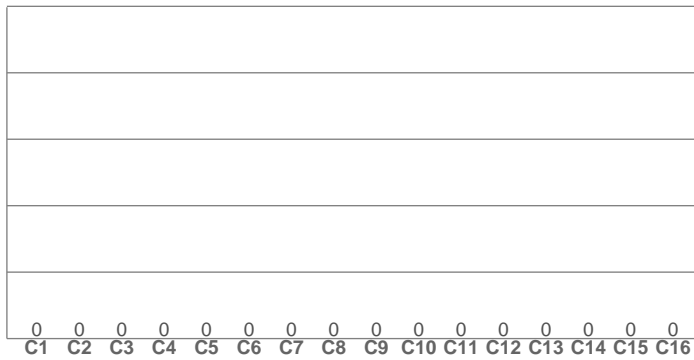

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

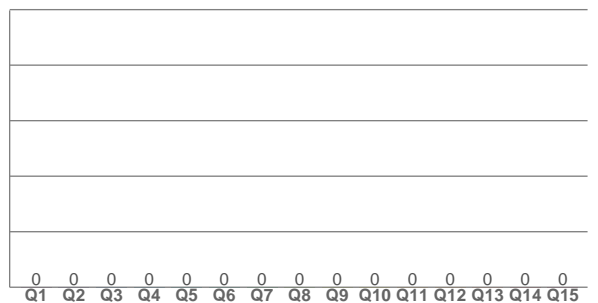

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.150	0.029	0.197	0.057	n/a

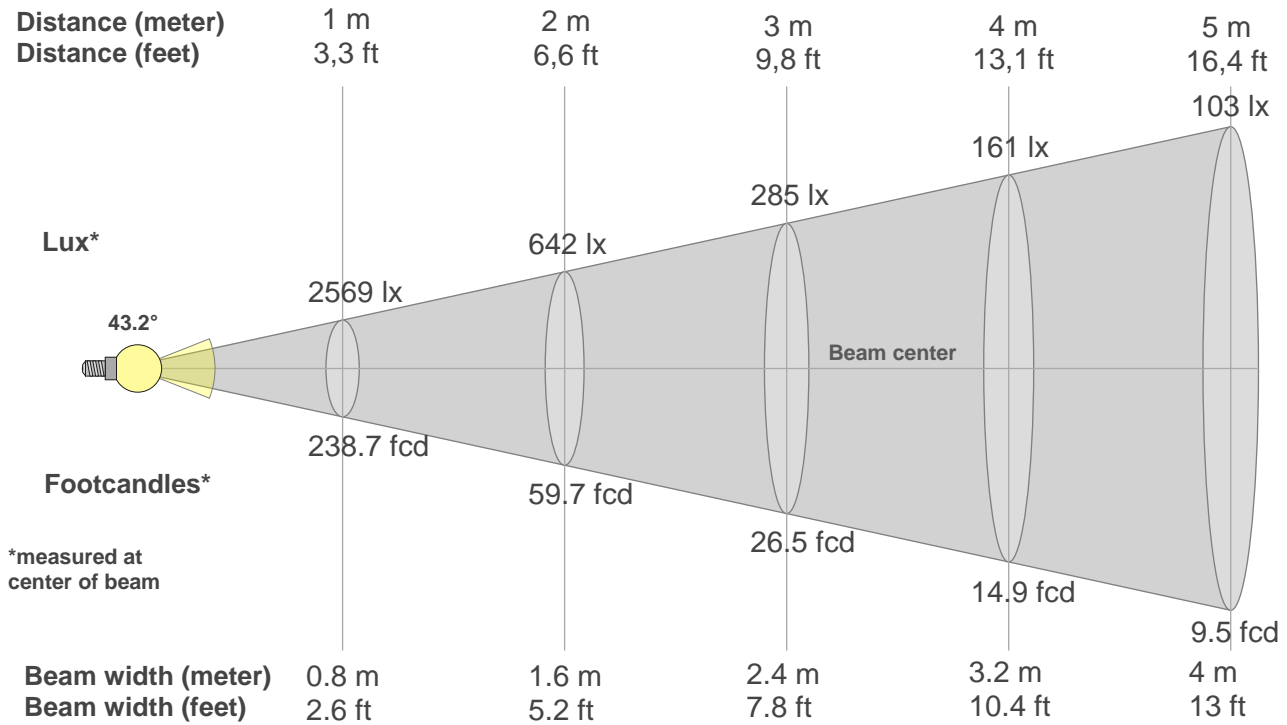

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2569lx	642lx	285lx	161lx	103lx	71lx	52lx	40lx	32lx	26lx	21lx	18lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx
238.7fcd	59.7fcd	26.5fcd	14.9fcd	9.5fcd	6.6fcd	4.9fcd	3.7fcd	2.9fcd	2.4fcd	2fcd	1.7fcd	1.4fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.7fcd	0.6fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2569	2565	2538	2497	2447	2389	2324	2252	2173	2086	1984	1872	1749	1619	1481	1339	1196	1054	912	782
100%	100%	99%	97%	95%	93%	90%	88%	85%	81%	77%	73%	68%	63%	58%	52%	47%	41%	36%	30%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2569	2549	2467	2337	2170	1965	1745	1518	1292	1074	874	694	542	419	325	254	203	166	139	119
100%	99%	96%	91%	84%	76%	68%	59%	50%	42%	34%	27%	21%	16%	13%	10%	8%	6%	5%	5%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2569	2565	2538	2497	2447	2389	2324	2252	2173	2086	1984	1872	1749	1619	1481	1339	1196	1054	912	782
100%	100%	99%	97%	95%	93%	90%	88%	85%	81%	77%	73%	68%	63%	58%	52%	47%	41%	36%	30%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2569	2549	2467	2337	2170	1965	1745	1518	1292	1074	874	694	542	419	325	254	203	166	139	119
100%	99%	96%	91%	84%	76%	68%	59%	50%	42%	34%	27%	21%	16%	13%	10%	8%	6%	5%	5%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
43.2°	76.2°	114.1°	90.2%	82.9%