

**Light efficiency:**

**9 Lumen/Watt**

**Light quality:**

**CRI: 0.0**

**Color temperature:**

**0 K**

**Output: 1737 lm**

**Peak: 1505 cd**


**Power: 204 W**

**PF: 1.0**



**58.1°**

**Beam angle**

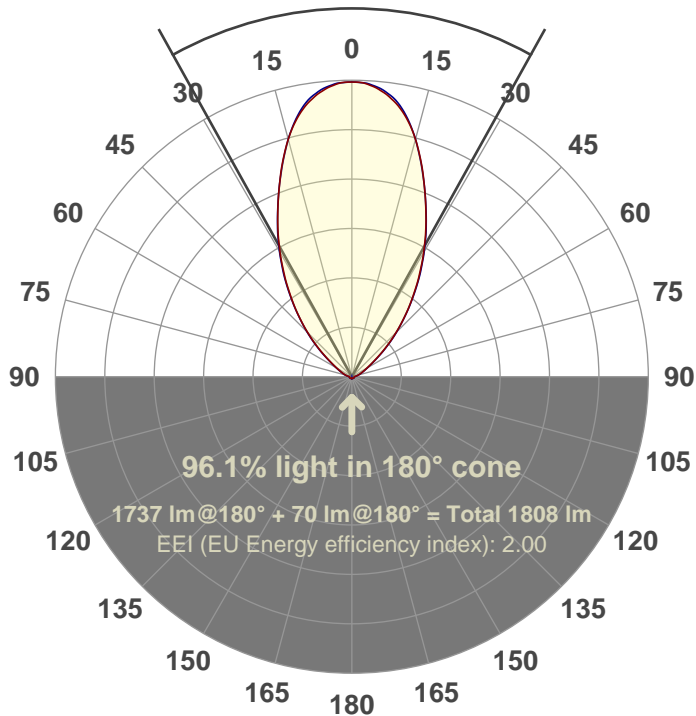

**Product name:**

**FL200-CM-RGBW-IM-60-ELV-SM-BLUE**

**Date and time:**

**27-Aug-18 1:48:27 PM**

**Additional Information:**

**LED: RGBW**

**FIXTURE: FL200**

**FILM: 250277 (60°)**

**COLOR-AMP: ON**

**STABILIZED: YES**

**COLOR (RGBW): BLUE**

**PERFORMED BY: ABDULLAH QURESHI**

**Color**





**CIE 1931**

**x: 0.150**



**y: 0.029**

**Spectra**

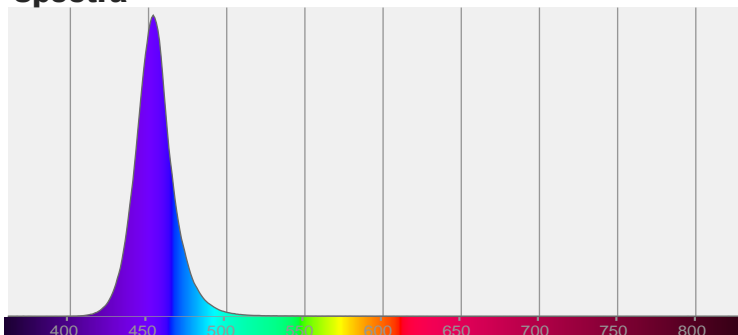

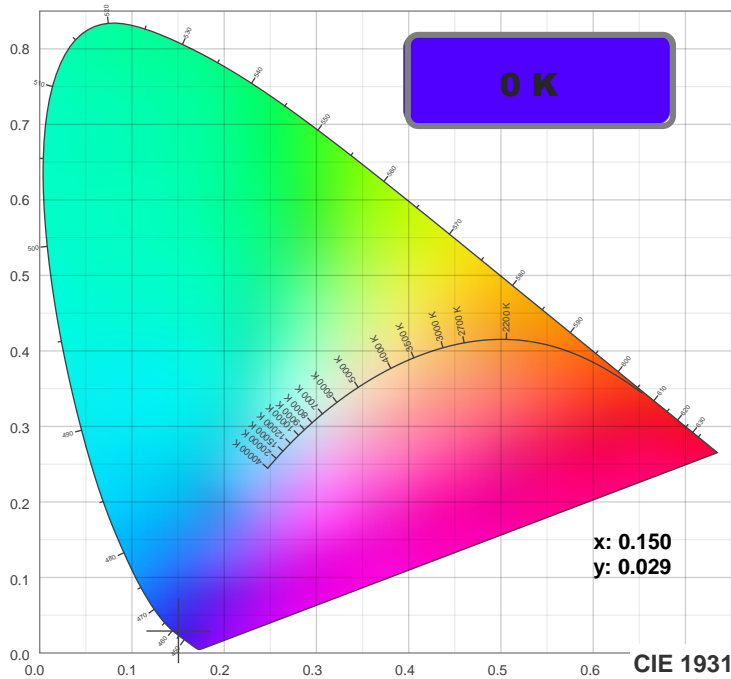


**TM30: 0.0**

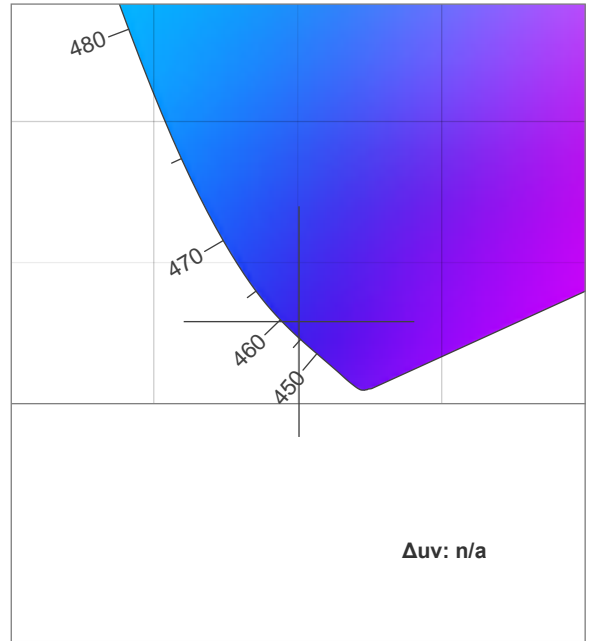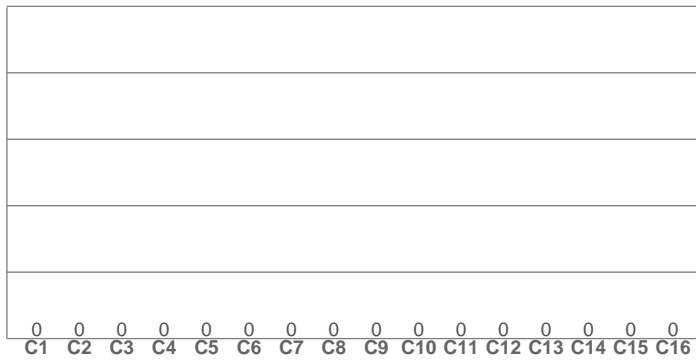


**Δuv: n/a**

**CIE 1931 ZOOM**

**CRI: 0.0 (R1-R8)**

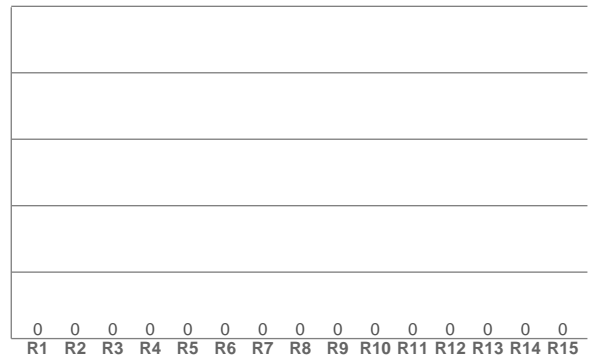

**CQS: 0.0**

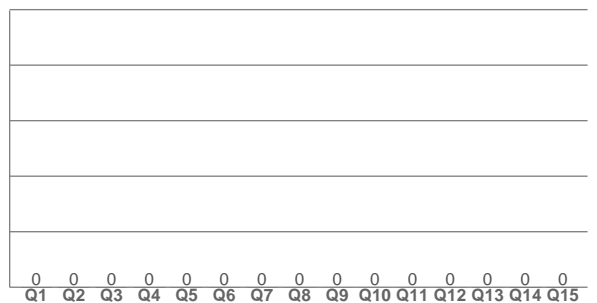

**CRI R values, only R1-R8 are used to calculate final CRI value**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**TM30 C values, 16 binned values out of total of 99 C values**


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS Q values**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.150	0.029	0.197	0.057	n/a

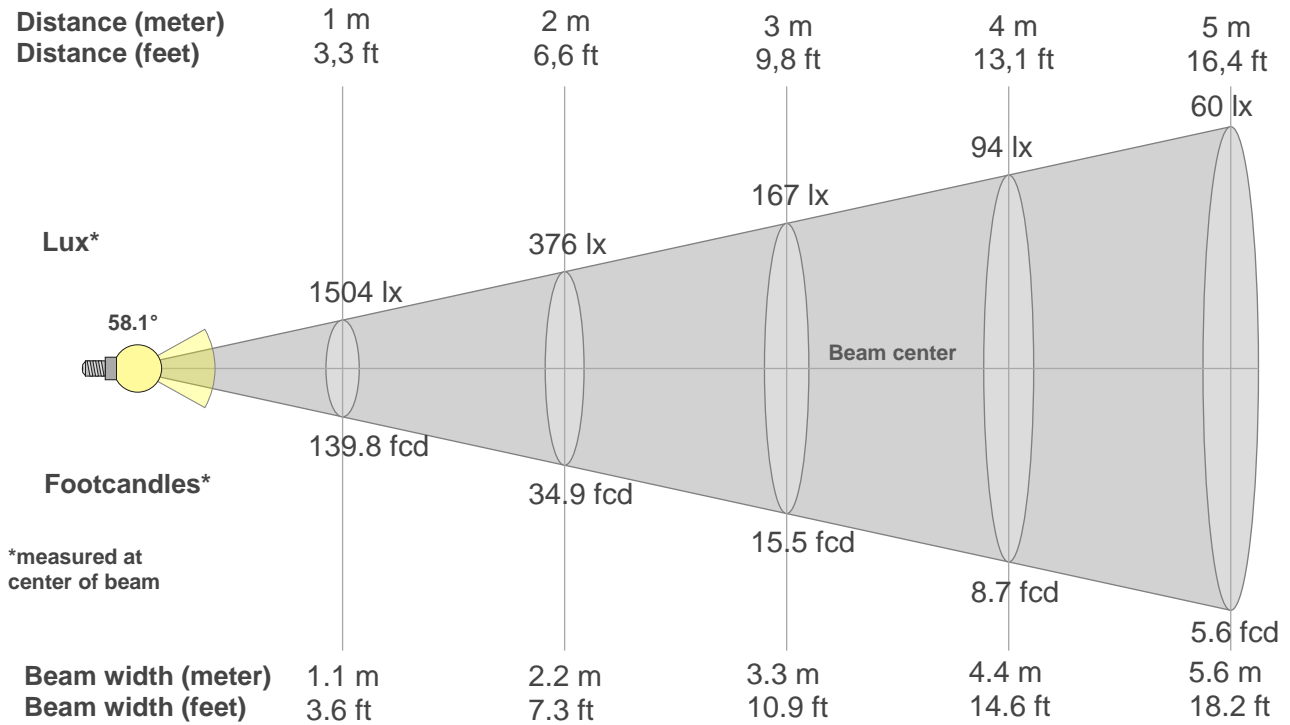

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1504lx	376lx	167lx	94lx	60lx	42lx	31lx	24lx	19lx	15lx	12lx	10lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx
139.8fcd	34.9fcd	15.5fcd	8.7fcd	5.6fcd	3.9fcd	2.9fcd	2.2fcd	1.7fcd	1.4fcd	1.2fcd	1fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1504	1478	1396	1255	1072	896	734	581	443	319	214	136	90	64	47	34	24	16	12	0
100%	98%	93%	83%	71%	60%	49%	39%	29%	21%	14%	9%	6%	4%	3%	2%	2%	1%	1%	0%

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1504	1485	1407	1255	1071	898	739	586	444	323	219	138	92	65	48	35	24	16	13	0
100%	99%	94%	83%	71%	60%	49%	39%	30%	21%	15%	9%	6%	4%	3%	2%	2%	1%	1%	0%

### Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1504	1478	1396	1255	1072	896	734	581	443	319	214	136	90	64	47	34	24	16	12	0
100%	98%	93%	83%	71%	60%	49%	39%	29%	21%	14%	9%	6%	4%	3%	2%	2%	1%	1%	0%

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1504	1485	1407	1255	1071	898	739	586	444	323	219	138	92	65	48	35	24	16	13	0
100%	99%	94%	83%	71%	60%	49%	39%	30%	21%	15%	9%	6%	4%	3%	2%	2%	1%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
58.1°	107.7°	147°	89.5%	76.7%