

Light efficiency:

38 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:


0 K

Output: 933 lm

Peak: 5443 cd

Power: 24.7 W

PF: 1.0

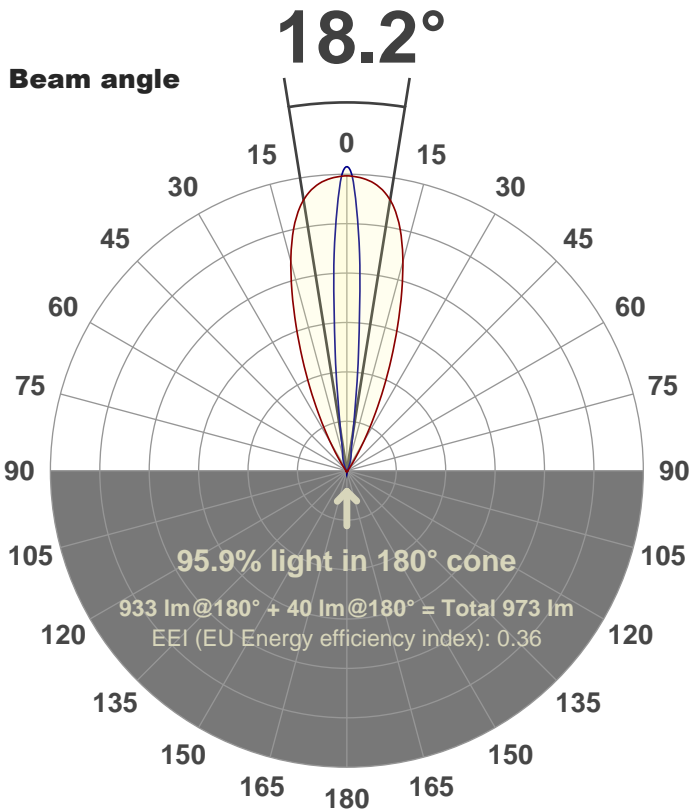

Product name:

FL25-CM-RGBW65K-IM-10x40-ELV-SM120-GREEN

Date and time:

13-Aug-18 9:15:26 AM

Additional Information:

LED: RGBW (6500K)

FIXTURE: FL25

FILM: 250264 (10°X40°)

COLOR-AMP: ON

STABILIZED: YES

COLOR (RGBW): GREEN

FWHM: 10°X39.5°

PERFORMED BY: ABDULLAH QURESHI

Color






CIE 1931

x: 0.159

y: 0.707



Spectra

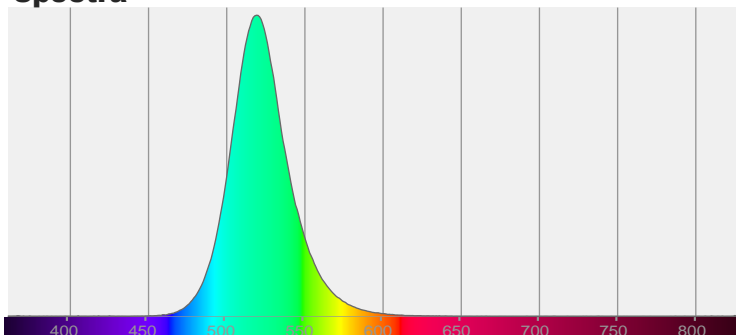

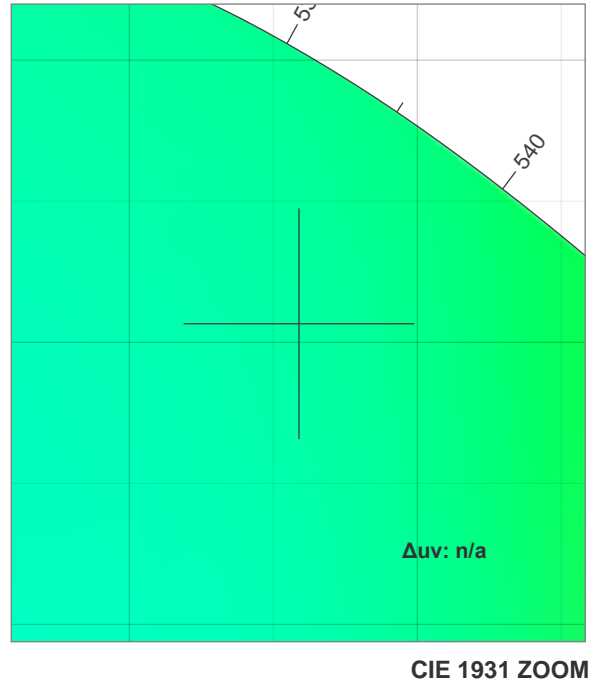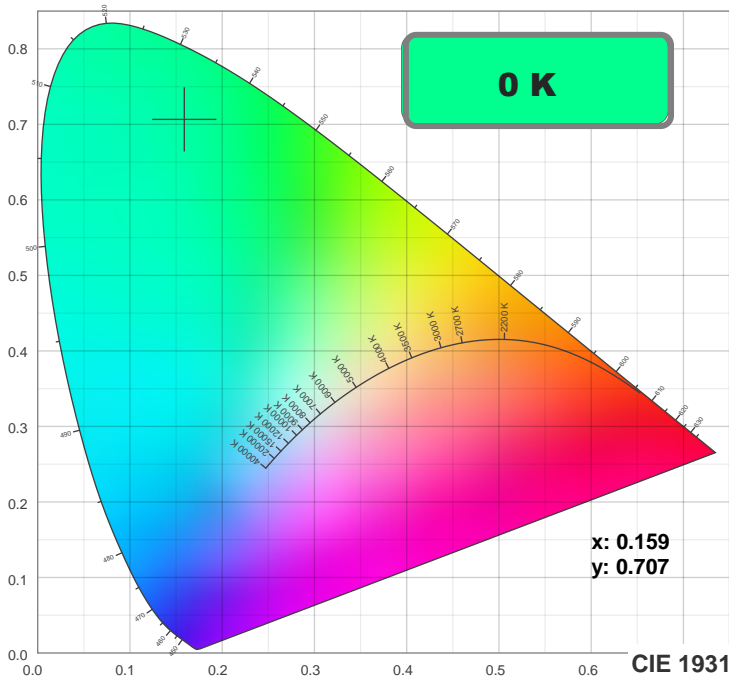

TM30: 0.0

CRI: 0.0 (R1-R8)

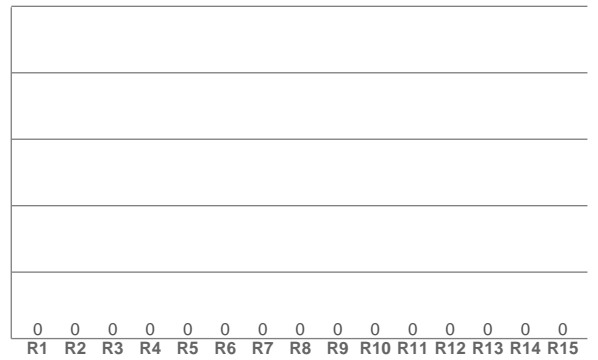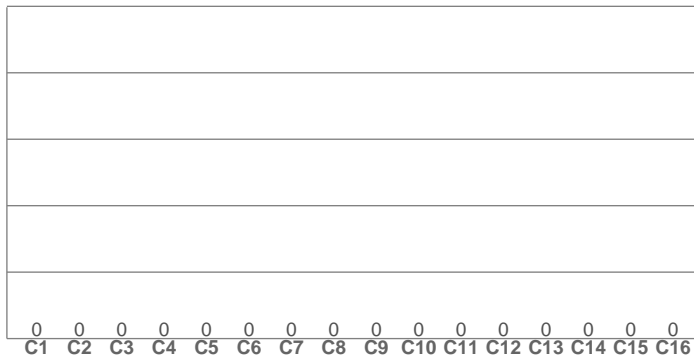

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

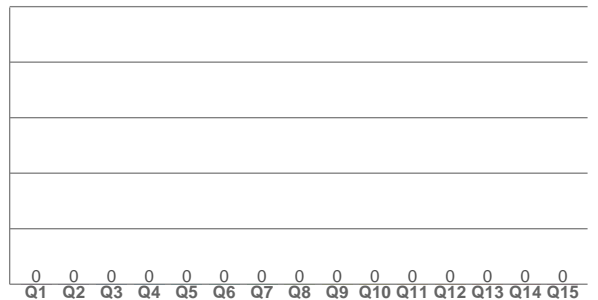

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.159	0.707	0.057	0.380	n/a

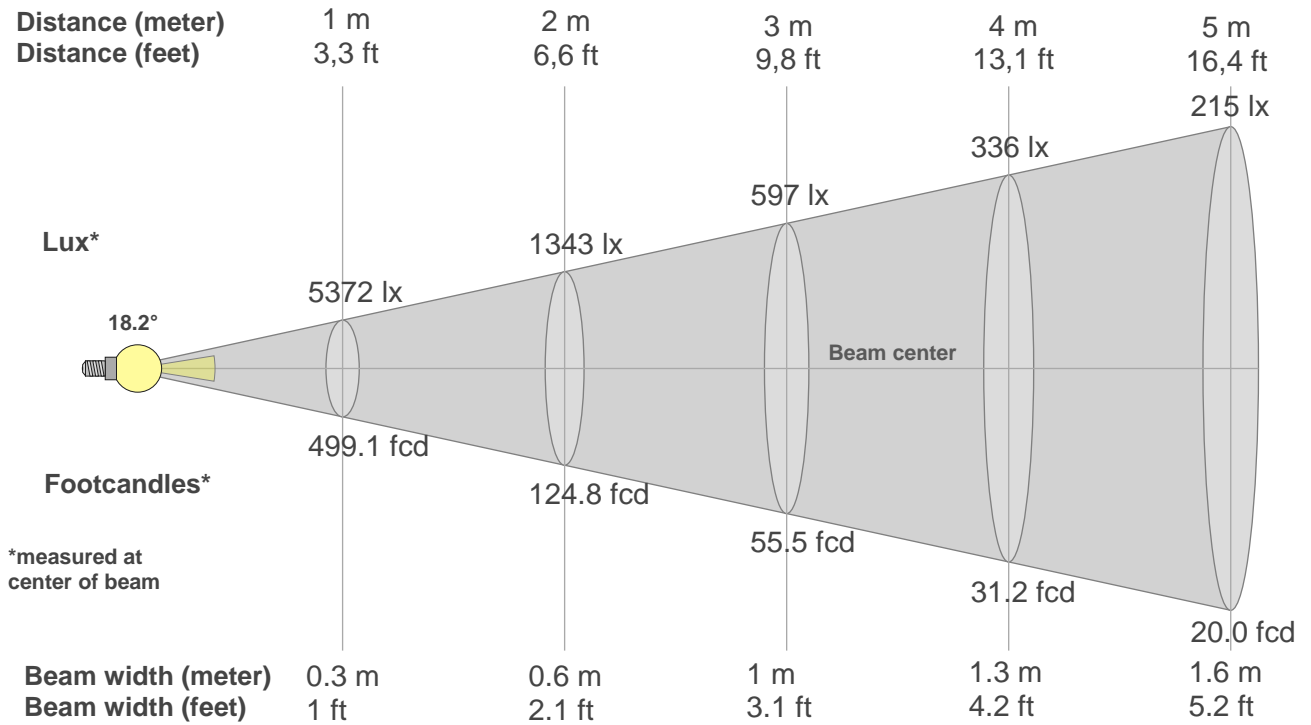

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
5372lx	1343lx	597lx	336lx	215lx	149lx	110lx	84lx	66lx	54lx	44lx	37lx	32lx	27lx	24lx	21lx	19lx	17lx	15lx	13lx
499.1fcd	124.8fcd	55.5fcd	31.2fcd	20fcd	13.9fcd	10.2fcd	7.8fcd	6.2fcd	5fcd	4.1fcd	3.5fcd	3fcd	2.5fcd	2.2fcd	1.9fcd	1.7fcd	1.5fcd	1.4fcd	1.2fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
5372	5440	5425	5410	5380	5346	5297	5234	5163	5059	4956	4801	4641	4446	4227	3995	3733	3471	3197	2923
100%	101%	101%	101%	100%	100%	99%	97%	96%	94%	92%	89%	86%	83%	79%	74%	69%	65%	60%	54%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
5372	5438	4848	4232	3500	2703	2003	1492	990	783	575	469	404	355	329	304	281	258	235	212
100%	101%	90%	79%	65%	50%	37%	28%	18%	15%	11%	9%	8%	7%	6%	6%	5%	5%	4%	4%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
5372	5440	5425	5410	5380	5346	5297	5234	5163	5059	4956	4801	4641	4446	4227	3995	3733	3471	3197	2923
100%	101%	101%	101%	100%	100%	99%	97%	96%	94%	92%	89%	86%	83%	79%	74%	69%	65%	60%	54%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
5372	5438	4848	4232	3500	2703	2003	1492	990	783	575	469	404	355	329	304	281	258	235	212
100%	101%	90%	79%	65%	50%	37%	28%	18%	15%	11%	9%	8%	7%	6%	6%	5%	5%	4%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
18.2°	33.3°	57.5°	91.3%	87.9%