

**Light efficiency:**



**Light quality:**



**Color temperature:**



**Output: 893 lm**

**Peak: 1325 cd**


**Power: 24.7 W**

**PF: 1.0**



**43.2°**

**Beam angle**

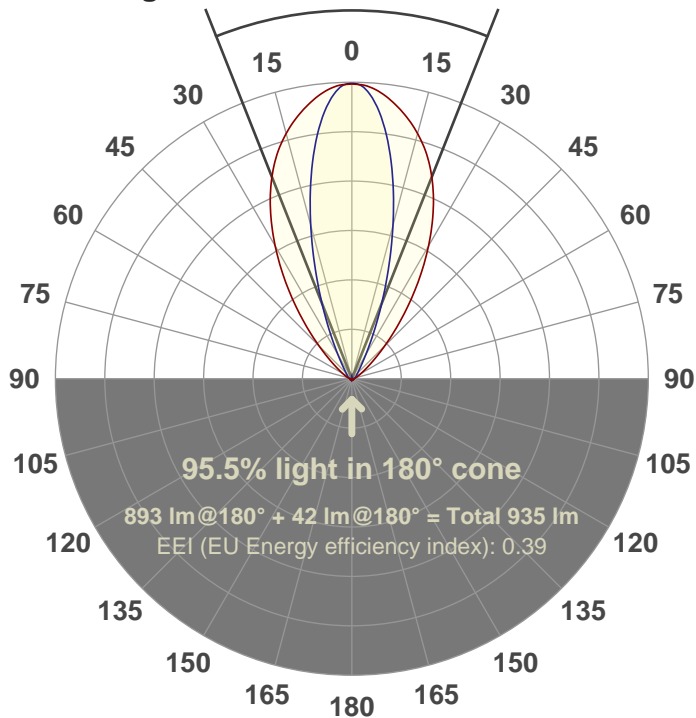

**Product name:**

**FL25-CM-RGBW65K-IM-30x60-ELV-SM120-GREEN**

**Date and time:**

**10-Aug-18 10:17:46 AM**

**Additional Information:**

**LED: RGBW (6500K)**

**FIXTURE: FL25**

**FILM: 250262 (30°X60°)**

**COLOR-AMP: ON**

**STABILIZED: YES**

**COLOR (RGBW): GREEN**

**FWHM: 31.7°X61.3°**

**PERFORMED BY: ABDULLAH QURESHI**

**Color**






**CIE 1931**

**x: 0.162**

**y: 0.705**


**Spectra**

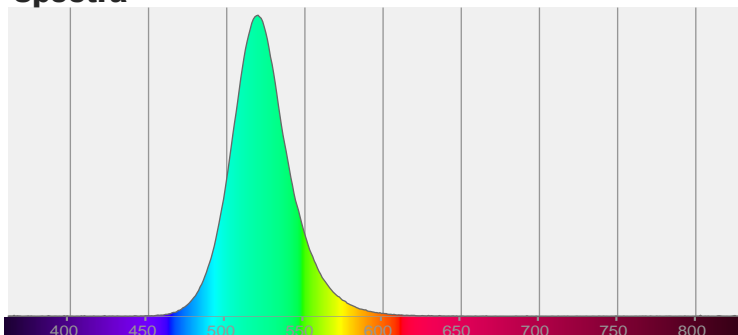

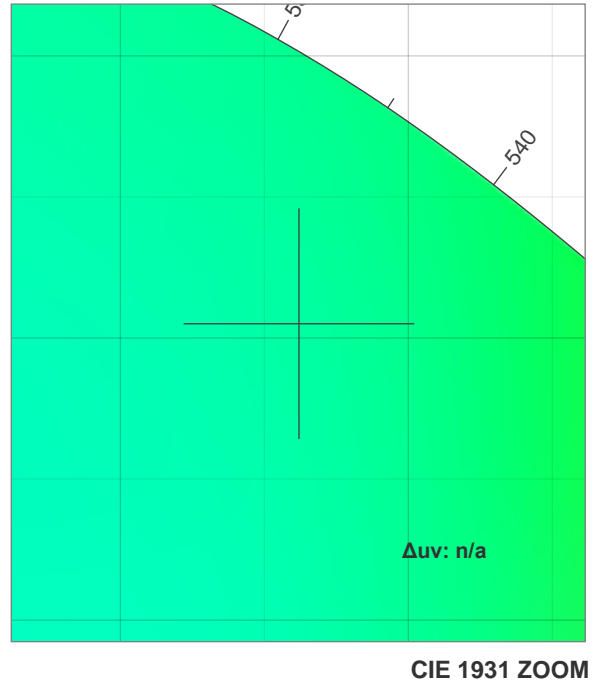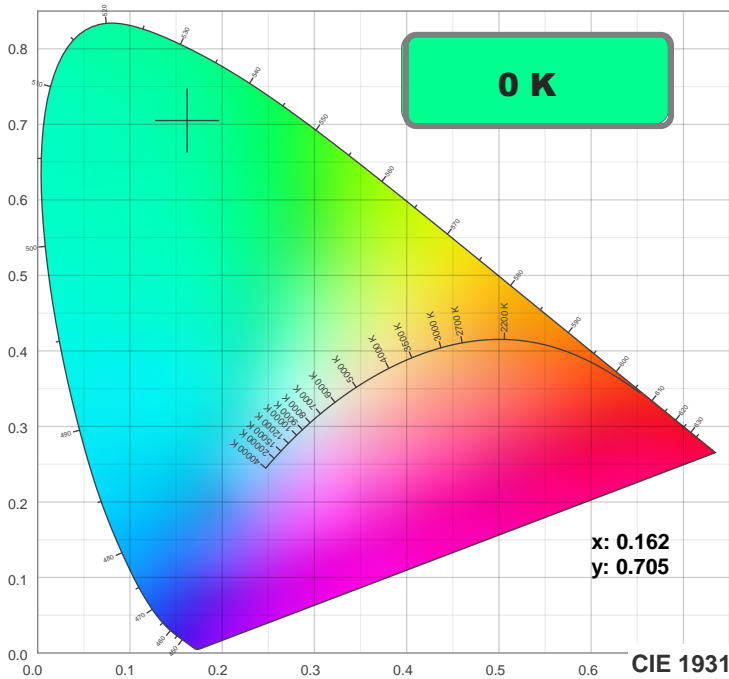

**TM30: 0.0**

**CRI: 0.0 (R1-R8)**

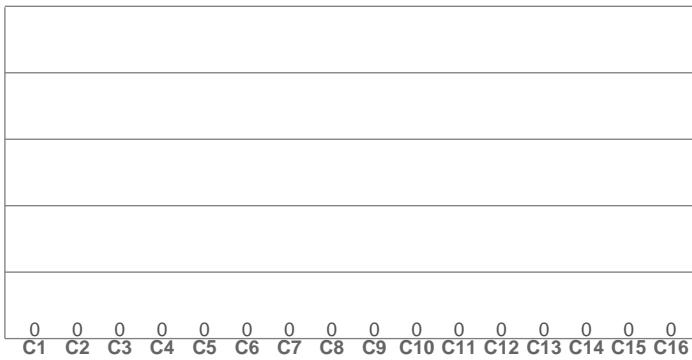

**CRI R values, only R1-R8 are used to calculate final CRI value**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


**TM30 C values, 16 binned values out of total of 99 C values**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS Q values**


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**CQS: 0.0**

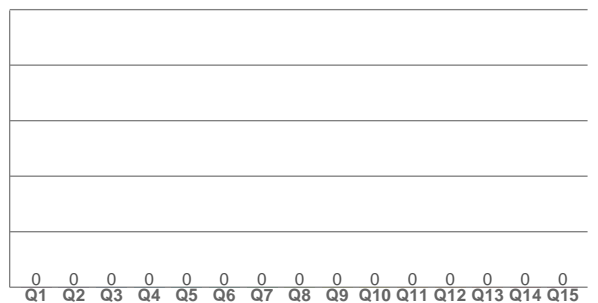

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
<b>CCT</b>	<b>CRI</b>	<b>CRI R9</b>	<b>TM30 Rf</b>	<b>TM30 Rg</b>	<b>CQS</b>	<b>x</b>	<b>y</b>	<b>u</b>	<b>v</b>	<b>Δuv</b>
<b>0 K</b>	<b>0.0</b>	<b>0.0</b>	<b>0.0</b>	<b>0.0</b>	<b>0.0</b>	<b>0.162</b>	<b>0.705</b>	<b>0.058</b>	<b>0.380</b>	<b>n/a</b>

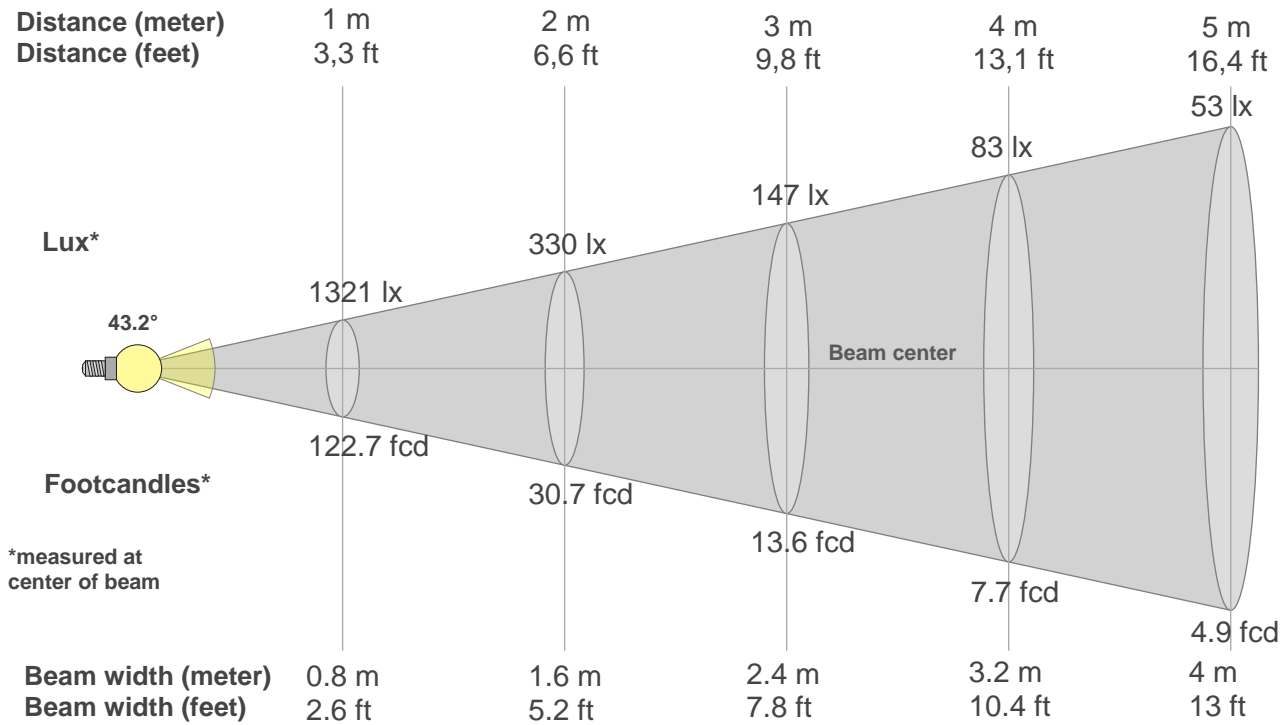

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1321lx	330lx	147lx	83lx	53lx	37lx	27lx	21lx	16lx	13lx	11lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx
122.7fcd	30.7fcd	13.6fcd	7.7fcd	4.9fcd	3.4fcd	2.5fcd	1.9fcd	1.5fcd	1.2fcd	1fcd	0.9fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1321	1319	1307	1287	1261	1230	1196	1159	1118	1072	1020	962	899	832	761	688	614	541	470	401
100%	100%	99%	97%	95%	93%	91%	88%	85%	81%	77%	73%	68%	63%	58%	52%	46%	41%	36%	30%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1321	1309	1267	1198	1108	1003	889	772	655	543	440	350	272	210	161	125	100	81	68	58
100%	99%	96%	91%	84%	76%	67%	58%	50%	41%	33%	26%	21%	16%	12%	9%	8%	6%	5%	4%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1321	1319	1307	1287	1261	1230	1196	1159	1118	1072	1020	962	899	832	761	688	614	541	470	401
100%	100%	99%	97%	95%	93%	91%	88%	85%	81%	77%	73%	68%	63%	58%	52%	46%	41%	36%	30%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1321	1309	1267	1198	1108	1003	889	772	655	543	440	350	272	210	161	125	100	81	68	58
100%	99%	96%	91%	84%	76%	67%	58%	50%	41%	33%	26%	21%	16%	12%	9%	8%	6%	5%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
43.2°	76.1°	111.4°	90.2%	83.1%