

Light efficiency:

17 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:


0 K

Output: 429 lm

Peak: 2399 cd

Power: 24.9 W

PF: 1.0

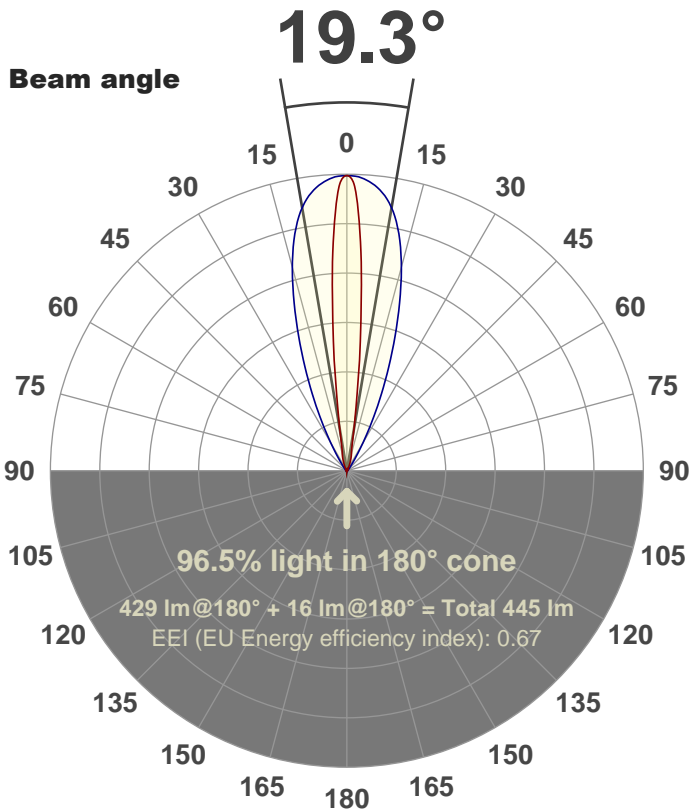

Product name:

FL25-CM-RGBW65K-IM-40X10-ELV-SM120-RED

Date and time:

10-Aug-18 2:37:15 PM

Additional Information:

LED: RGBW (6500K)

FIXTURE: FL25

FILM: 250269 (40°X10°)

COLOR-AMP: ON

STABILIZED: YES

COLOR (RGBW): RED

FWHM: 38.8°X11.2°

PERFORMED BY: ABDULLAH QURESHI

Color





CIE 1931

x: 0.702



y: 0.297

Spectra

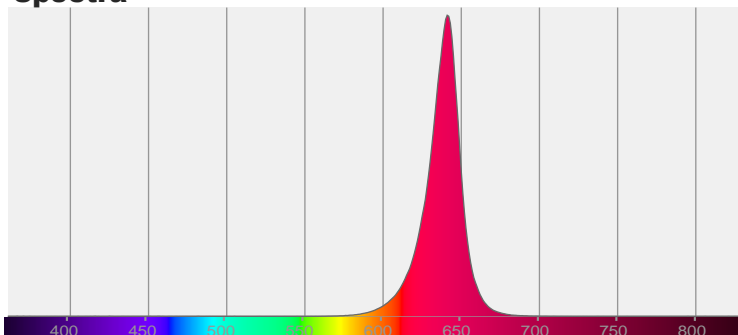

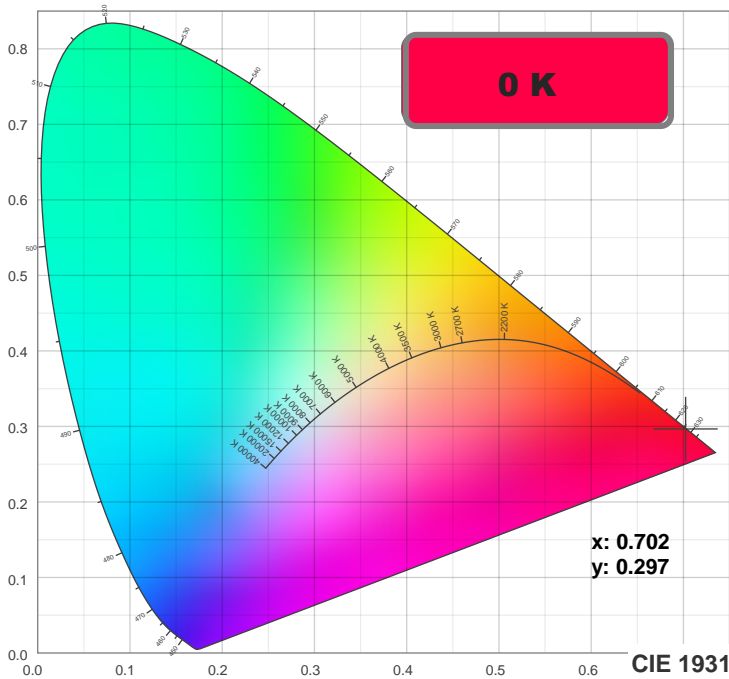


TM30: 0.0

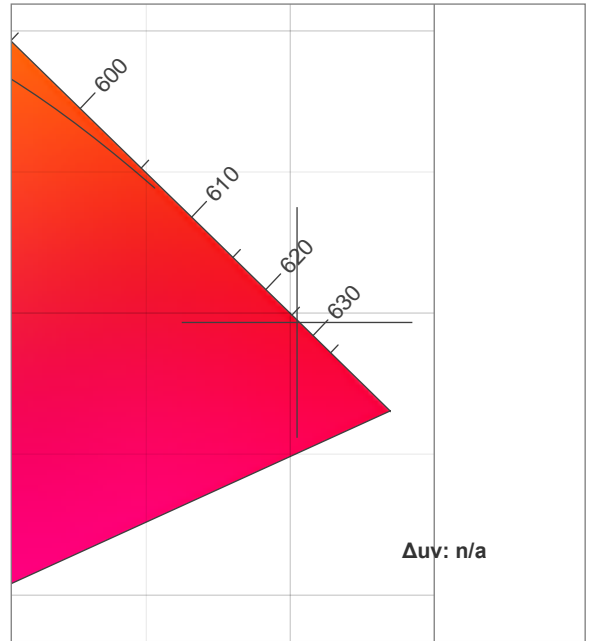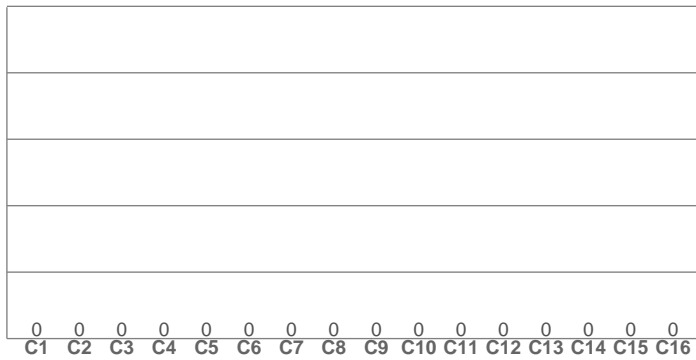


$\Delta uv: n/a$

CIE 1931 ZOOM

CRI: 0.0 (R1-R8)

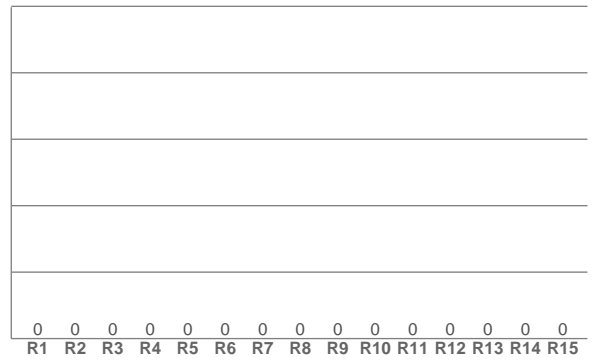

CQS: 0.0

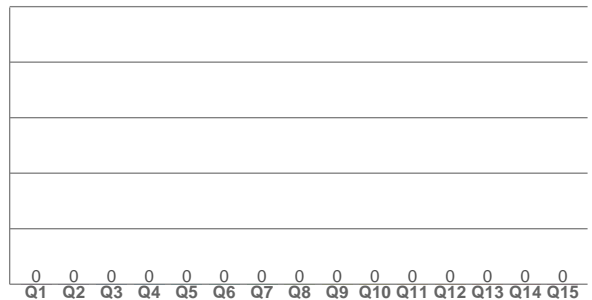

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.702	0.297	0.545	0.345	n/a

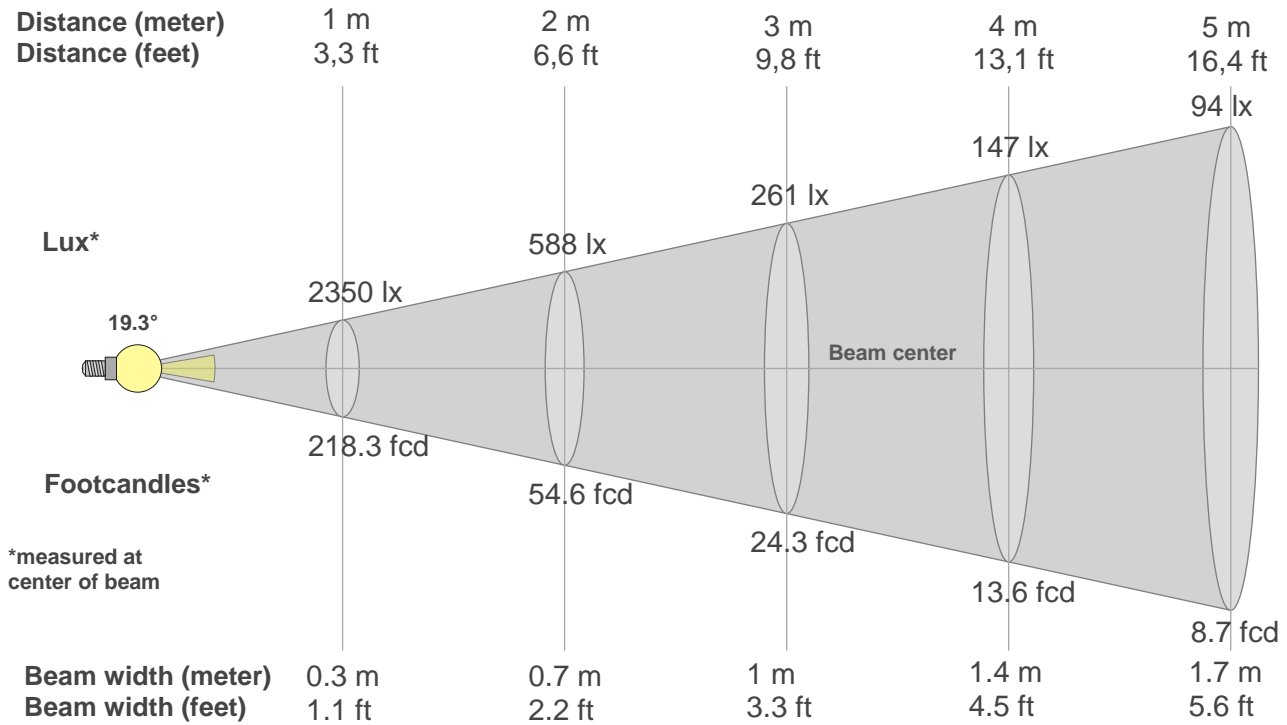

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2350lx	588lx	261lx	147lx	94lx	65lx	48lx	37lx	29lx	24lx	19lx	16lx	14lx	12lx	10lx	9lx	8lx	7lx	7lx	6lx
218.3fcd	54.6fcd	24.3fcd	13.6fcd	8.7fcd	6.1fcd	4.5fcd	3.4fcd	2.7fcd	2.2fcd	1.8fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2350	2332	2191	1948	1679	1359	1044	807	571	433	319	245	206	173	158	144	132	121	109	97
100%	99%	93%	83%	71%	58%	44%	34%	24%	18%	14%	10%	9%	7%	7%	6%	6%	5%	5%	4%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2350	2395	2391	2379	2365	2342	2319	2284	2247	2199	2143	2078	1998	1916	1814	1711	1598	1481	1364	1246
100%	102%	102%	101%	101%	100%	99%	97%	96%	94%	91%	88%	85%	82%	77%	73%	68%	63%	58%	53%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2350	2332	2191	1948	1679	1359	1044	807	571	433	319	245	206	173	158	144	132	121	109	97
100%	99%	93%	83%	71%	58%	44%	34%	24%	18%	14%	10%	9%	7%	7%	6%	6%	5%	5%	4%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
2350	2395	2391	2379	2365	2342	2319	2284	2247	2199	2143	2078	1998	1916	1814	1711	1598	1481	1364	1246
100%	102%	102%	101%	101%	100%	99%	97%	96%	94%	91%	88%	85%	82%	77%	73%	68%	63%	58%	53%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
19.3°	34.9°	57.8°	92.4%	89.3%