

Light efficiency:



Light quality:



Color temperature:




Output: 553 lm

Peak: 3322 cd

Power: 50.0 W

PF: 1.0

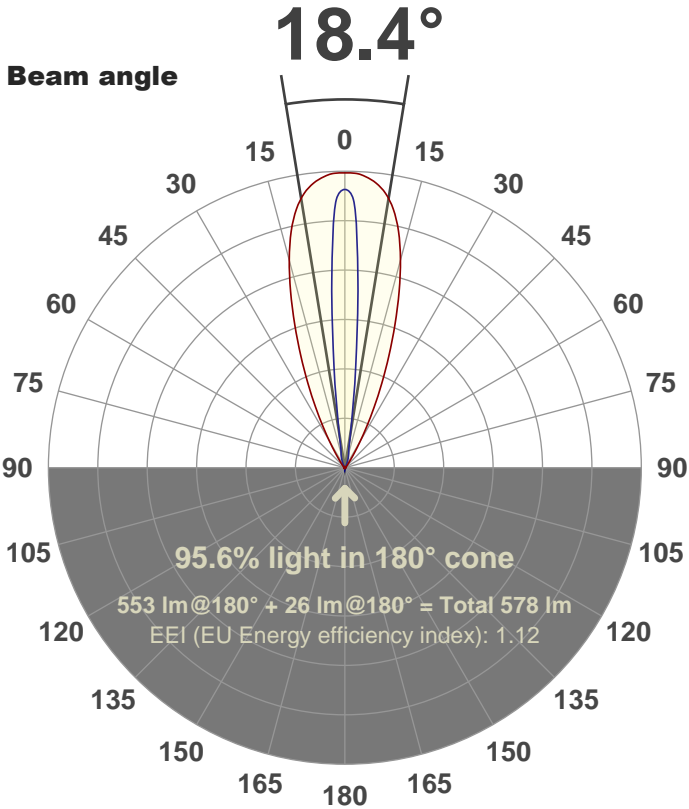

Product name:

FL50-CM-RGBW65K-IM-10X40-ELV-SM-BLUE

Date and time:

13-Aug-18 1:18:50 PM

Additional Information:

LED: RGBW

FIXTURE: FL50

FILM: 250264 (10°X40°)

COLORAMP: ON


STABILIZED: YES

COLOR (RGBW): BLUE

FWHM: 10.7°x38.2°

PERFORMED BY: ABDULLAH QURESHI

Color






CIE 1931

x: 0.151

y: 0.029



Spectra

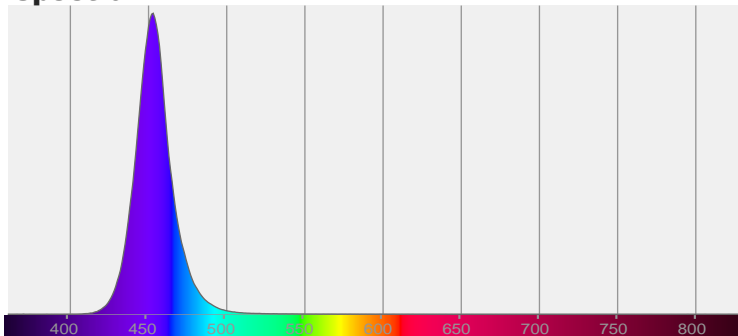

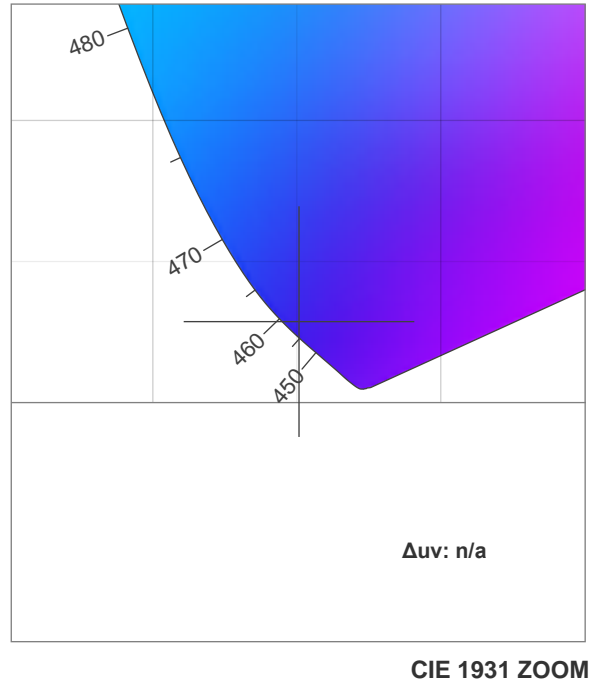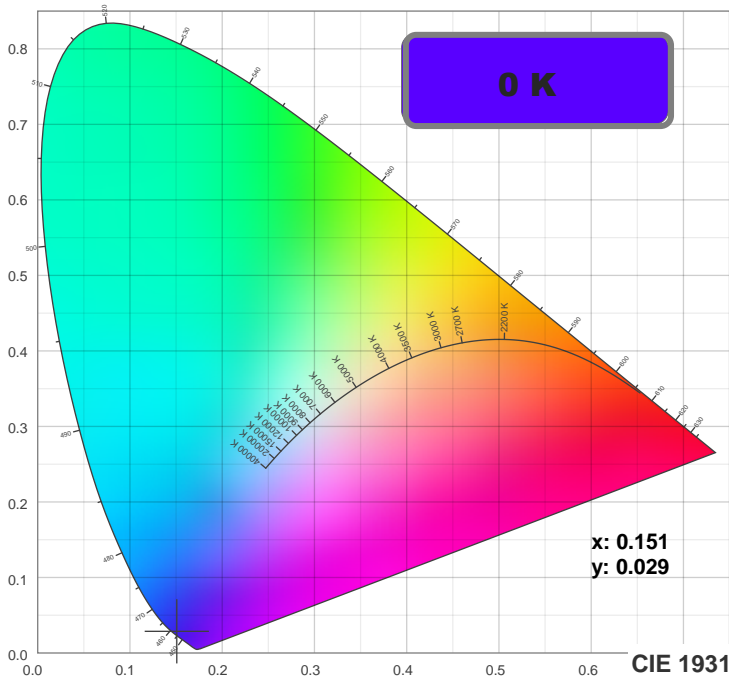

TM30: 0.0

CRI: 0.0 (R1-R8)

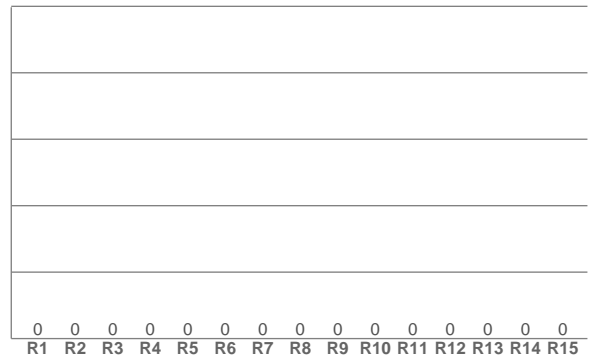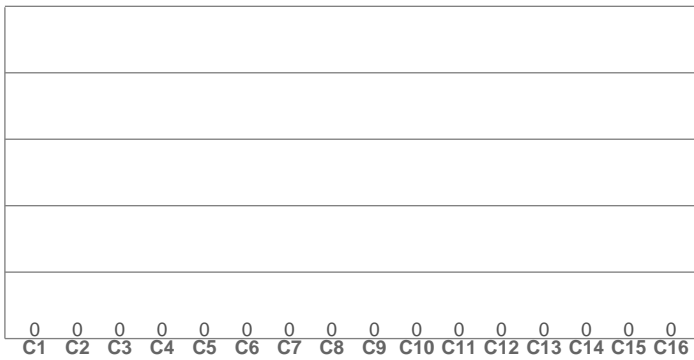

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

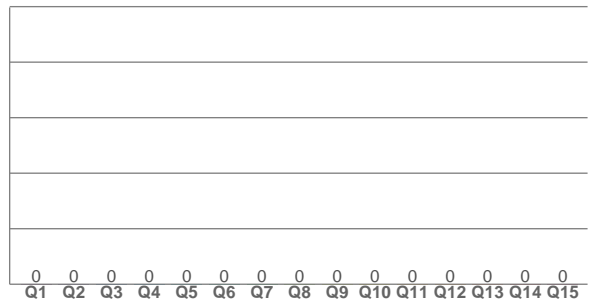

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.151	0.029	0.198	0.057	n/a

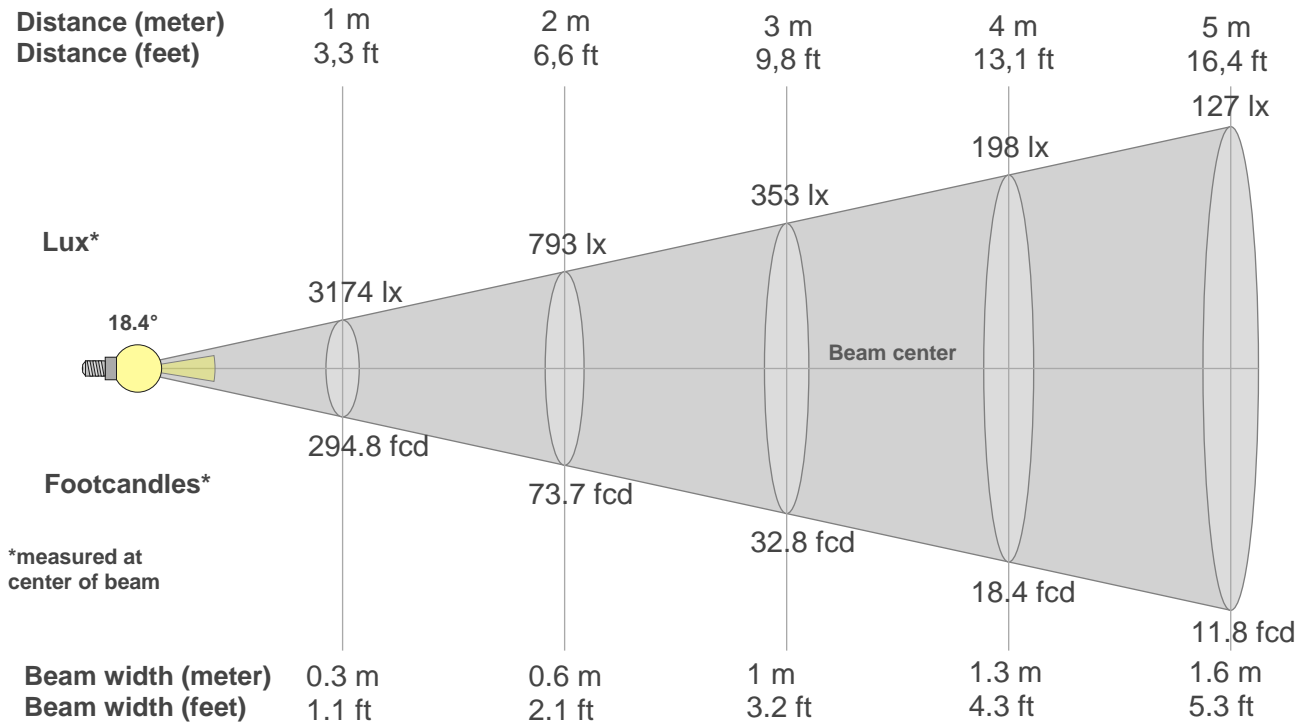

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3174lx	793lx	353lx	198lx	127lx	88lx	65lx	50lx	39lx	32lx	26lx	22lx	19lx	16lx	14lx	12lx	11lx	10lx	9lx	8lx
294.8fcd	73.7fcd	32.8fcd	18.4fcd	11.8fcd	8.2fcd	6fcd	4.6fcd	3.6fcd	2.9fcd	2.4fcd	2fcd	1.7fcd	1.5fcd	1.3fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
3174	3322	3321	3306	3290	3264	3235	3194	3147	3085	3011	2924	2817	2703	2563	2421	2260	2098	1929	1759
100%	105%	105%	104%	104%	103%	102%	101%	99%	97%	95%	92%	89%	85%	81%	76%	71%	66%	61%	55%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
3174	3025	2950	2531	2112	1660	1208	900	618	449	334	259	222	193	179	165	153	141	128	116
100%	95%	93%	80%	67%	52%	38%	28%	19%	14%	11%	8%	7%	6%	6%	5%	5%	4%	4%	4%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
3174	3322	3321	3306	3290	3264	3235	3194	3147	3085	3011	2924	2817	2703	2563	2421	2260	2098	1929	1759
100%	105%	105%	104%	104%	103%	102%	101%	99%	97%	95%	92%	89%	85%	81%	76%	71%	66%	61%	55%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
3174	3025	2950	2531	2112	1660	1208	900	618	449	334	259	222	193	179	165	153	141	128	116
100%	95%	93%	80%	67%	52%	38%	28%	19%	14%	11%	8%	7%	6%	6%	5%	5%	4%	4%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
18.4°	32.8°	56°	90.8%	87.5%