

**Light efficiency:**

**21 Lumen/Watt**

**Light quality:**

**CRI: 0.0**

**Color temperature:**

**0 K**

**Output: 1068 lm**

**Peak: 1460 cd**


**Power: 50.0 W**

**PF: 1.0**



**43.2°**

**Beam angle**

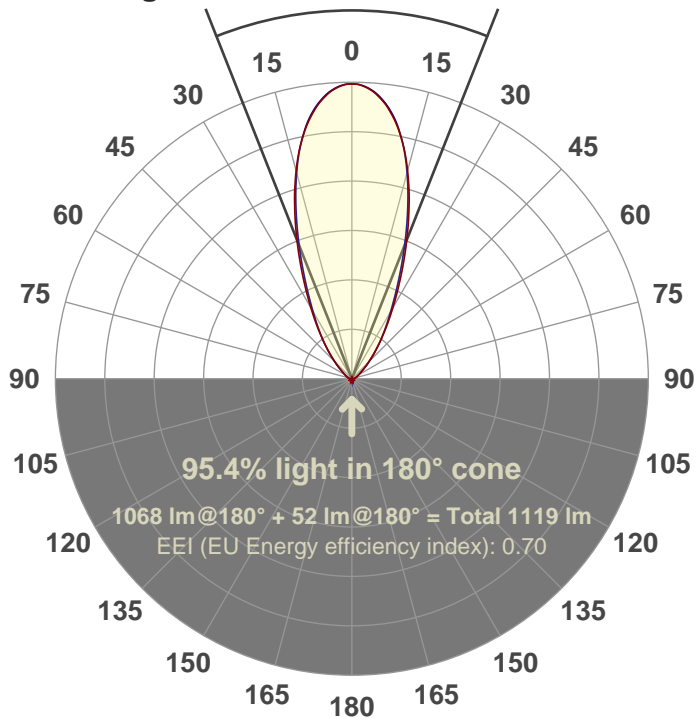

**Product name:**

**FL50-CM-RGBW65K-IM-40-ELV-SM-RED**

**Date and time:**

**30-May-18 12:31:21 PM**

**Additional Information:**

**LED: RGBW**

**FIXTURE: FL50**

**FILM: 250257 (40°)**

**COLORAMP: ON**

**STABILIZED: YES**

**COLOR (RGBW): RED**

**PERFORMED BY: ABDULLAH QURESHI**

**Color**





**CIE 1931**

**x: 0.700**



**y: 0.298**

**Spectra**

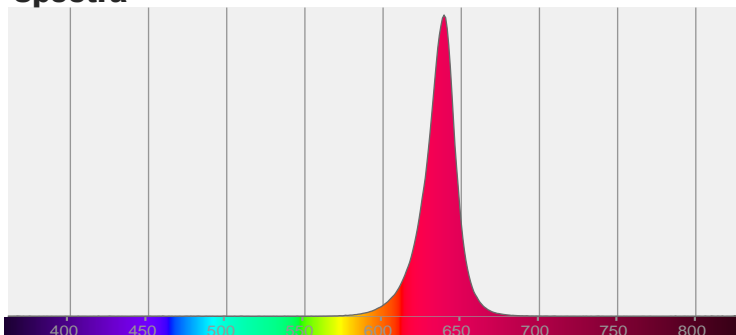

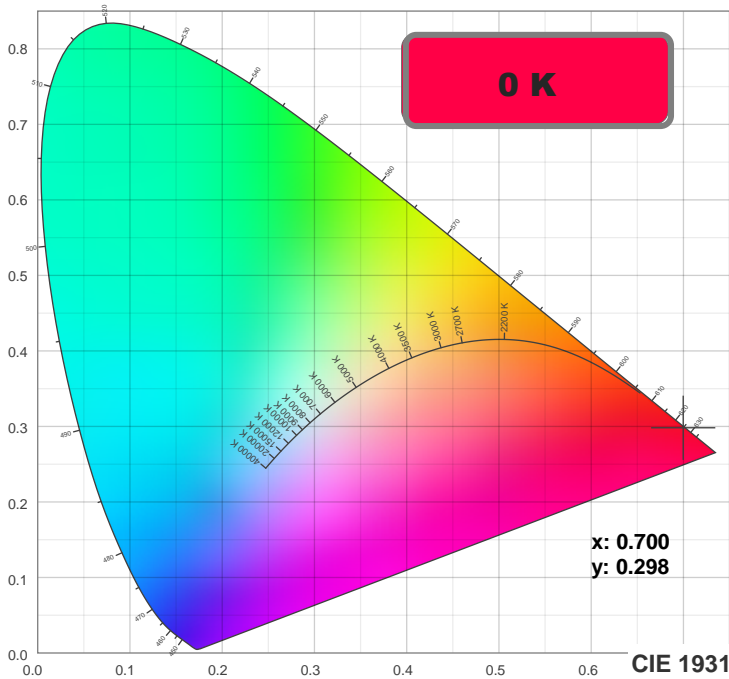


TM30: 0.0

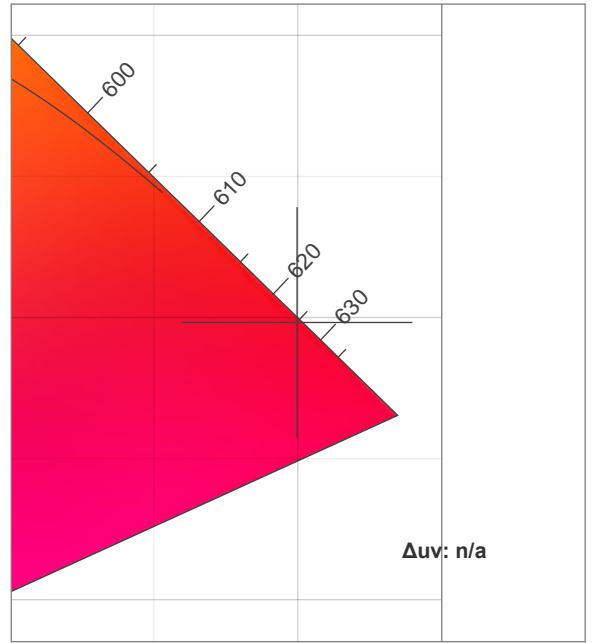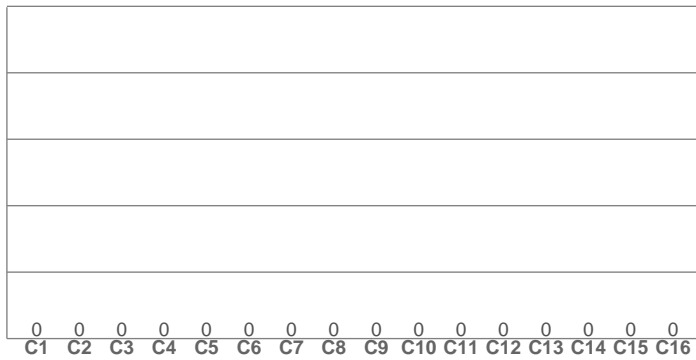


$\Delta uv$ : n/a

CIE 1931 ZOOM

CRI: 0.0 (R1-R8)

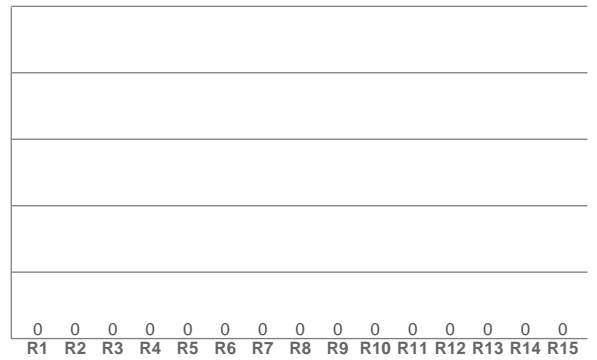

CQS: 0.0

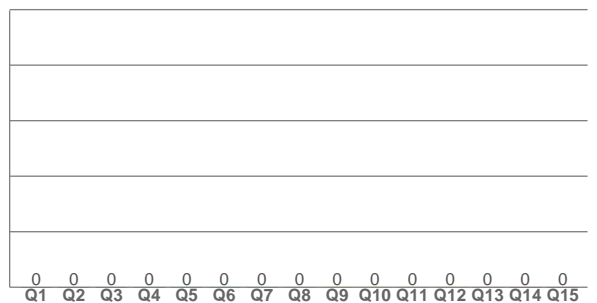

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
0 K	0.0	0.0	0.0	0.0	0.0	0.700	0.298	0.540	0.345	n/a

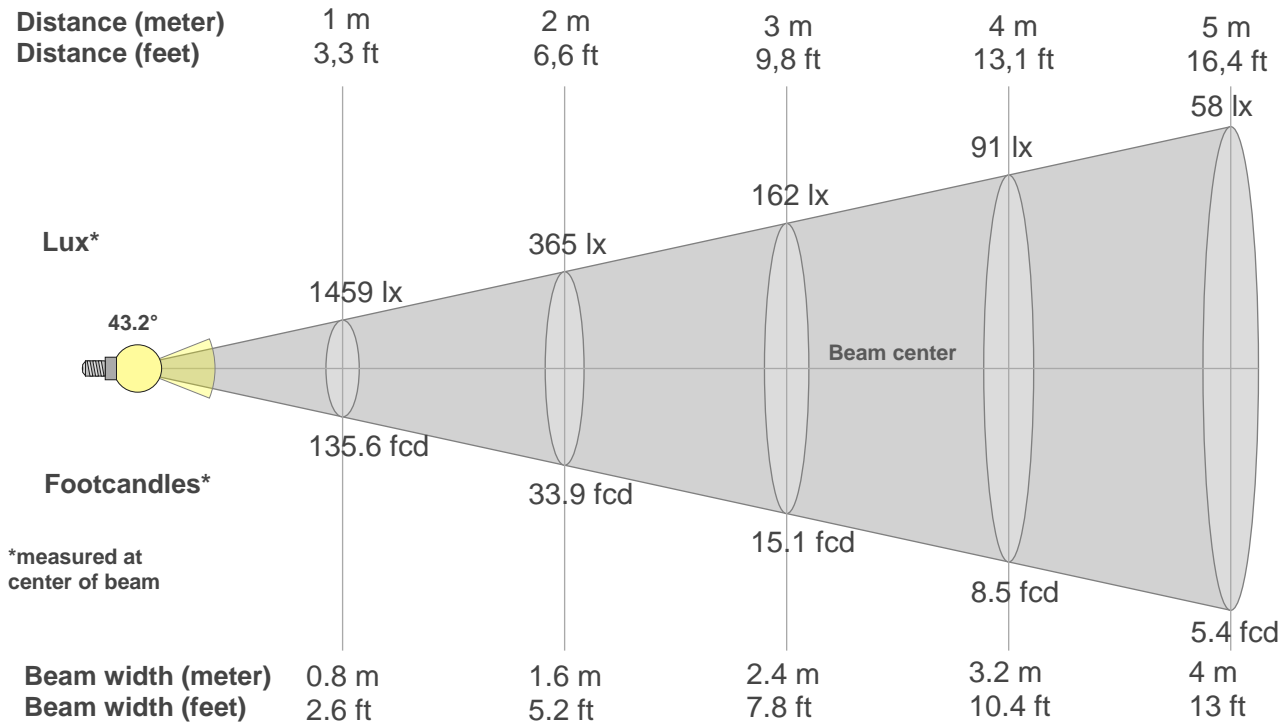

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1459lx	365lx	162lx	91lx	58lx	41lx	30lx	23lx	18lx	15lx	12lx	10lx	9lx	7lx	6lx	6lx	5lx	5lx	4lx	4lx
135.6fcd	33.9fcd	15.1fcd	8.5fcd	5.4fcd	3.8fcd	2.8fcd	2.1fcd	1.7fcd	1.4fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1459	1451	1428	1391	1340	1277	1200	1113	1017	917	817	719	628	545	471	406	349	299	255	216
100%	99%	98%	95%	92%	87%	82%	76%	70%	63%	56%	49%	43%	37%	32%	28%	24%	21%	17%	15%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1459	1453	1431	1395	1345	1281	1201	1107	1003	896	790	689	597	516	445	385	334	290	252	217
100%	100%	98%	96%	92%	88%	82%	76%	69%	61%	54%	47%	41%	35%	30%	26%	23%	20%	17%	15%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1459	1451	1428	1391	1340	1277	1200	1113	1017	917	817	719	628	545	471	406	349	299	255	216
100%	99%	98%	95%	92%	87%	82%	76%	70%	63%	56%	49%	43%	37%	32%	28%	24%	21%	17%	15%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1459	1453	1431	1395	1345	1281	1201	1107	1003	896	790	689	597	516	445	385	334	290	252	217
100%	100%	98%	96%	92%	88%	82%	76%	69%	61%	54%	47%	41%	35%	30%	26%	23%	20%	17%	15%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
43.2°	85.7°	122.5°	89.8%	81.9%