

**Light efficiency:**

**21 Lumen/Watt**

**Light quality:**

**CRI: 0.0**

**Color temperature:**

**0 K**

**Output: 1048 lm**

**Peak: 1672 cd**


**Power: 50.0 W**

**PF: 1.0**



**41.5°**

**Beam angle**

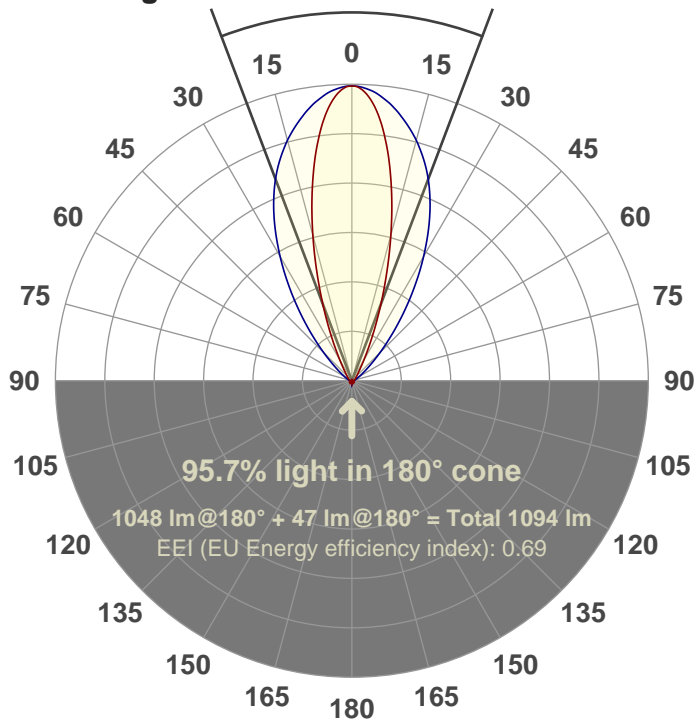

**Color**



**CIE 1931**  
**x: 0.701**  
**y: 0.298**

**Product name:**

**FL50-CM-RGBW65K-IM-60X30-ELV-SM-RED**

**Date and time:**

**04-Jun-18 9:28:12 AM**

**Additional Information:**

**LED: RGBW**

**FIXTURE: FL50**

**FILM: 250267 (60°X30°)**

**COLORAMP: ON**


**STABILIZED: YES**


**COLOR (RGBW): RED**

**FWHM: 59.1°X30.5°**



**PERFORMED BY: ABDULLAH QURESHI**

**Spectra**

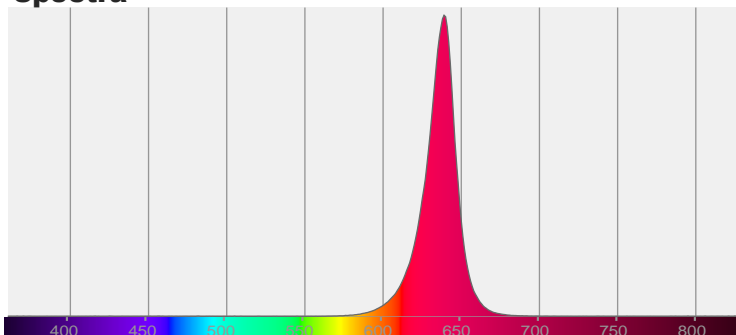


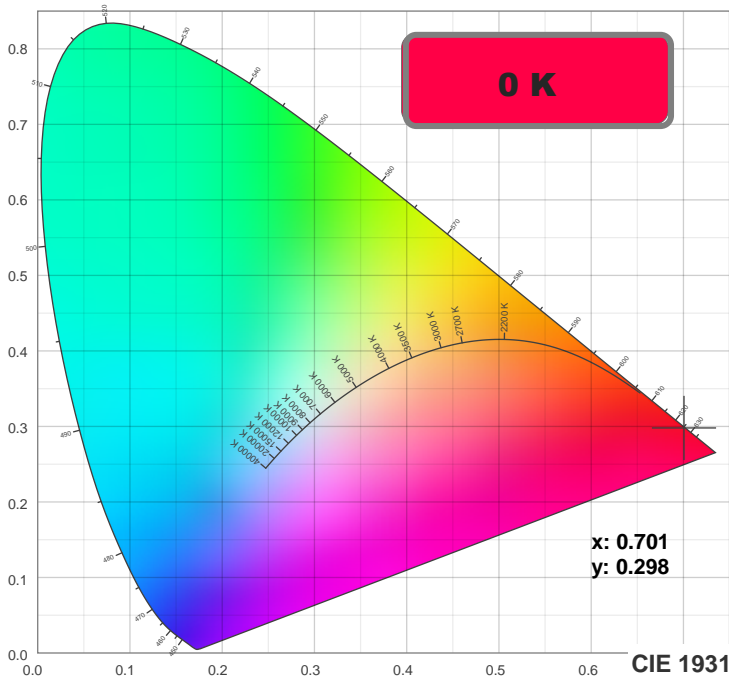


TM30: 0.0

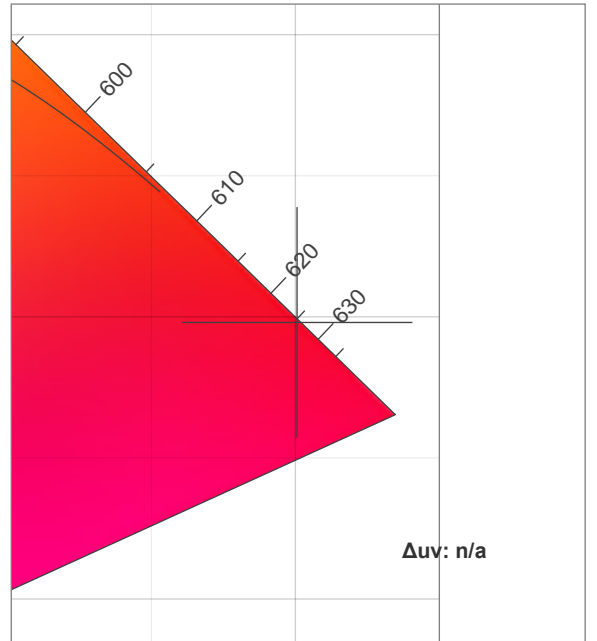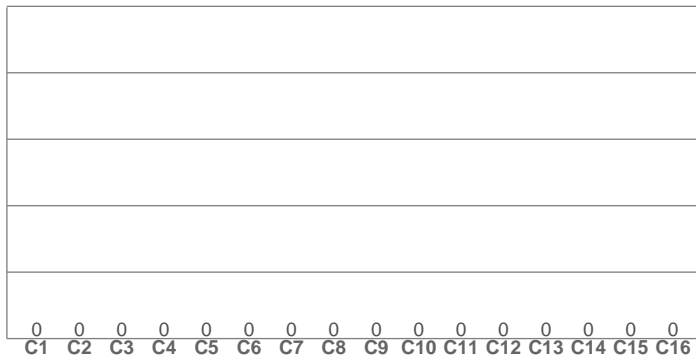

CRI: 0.0 (R1-R8)

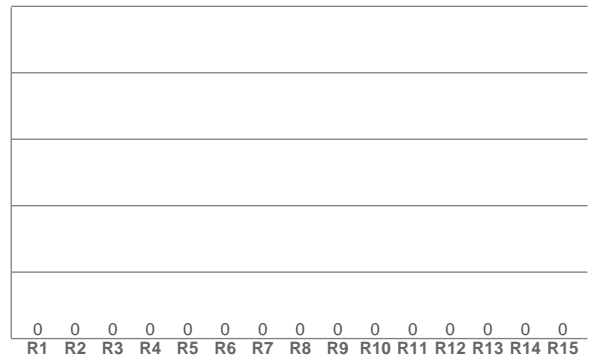

CQS: 0.0

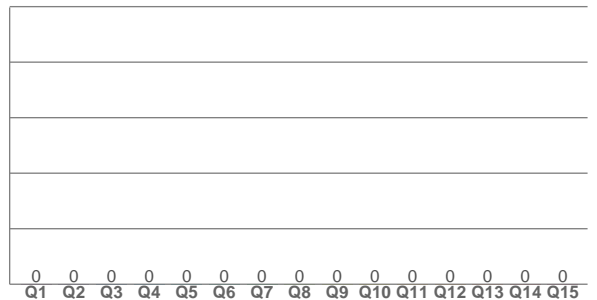

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.701	0.298	0.542	0.346	n/a

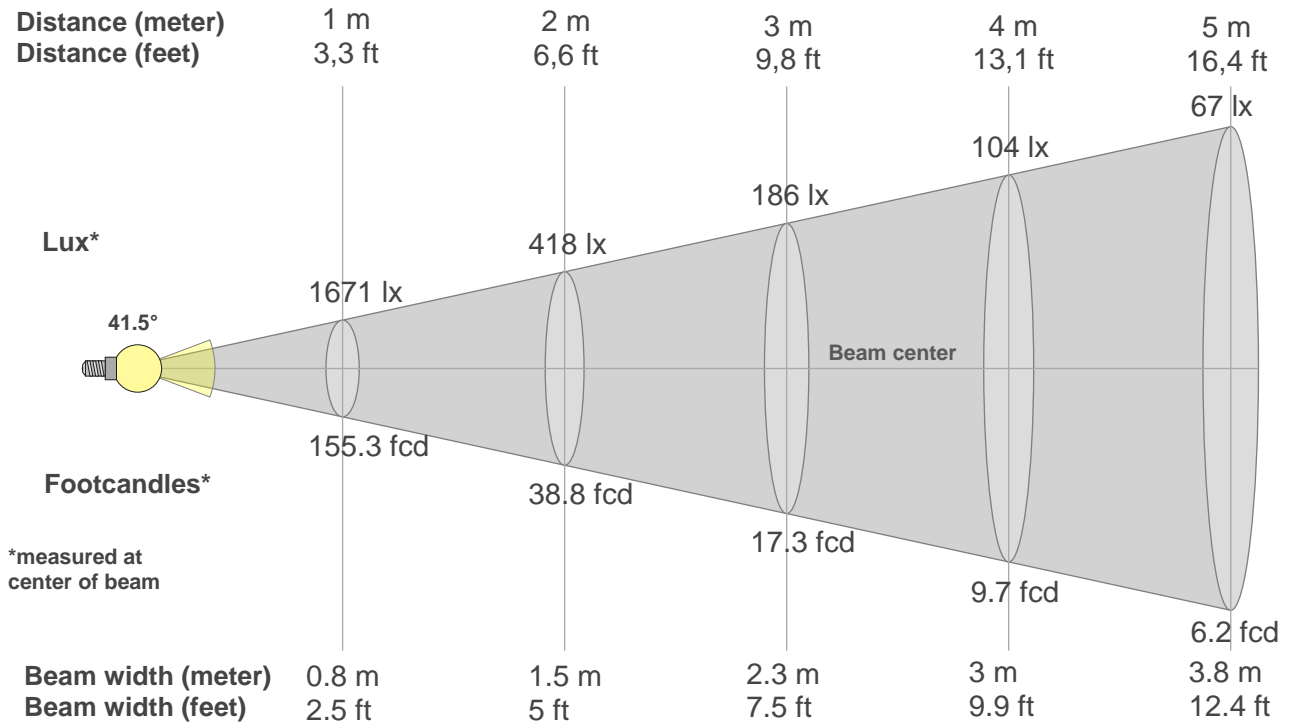

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1671lx	418lx	186lx	104lx	67lx	46lx	34lx	26lx	21lx	17lx	14lx	12lx	10lx	9lx	7lx	7lx	6lx	5lx	5lx	4lx
155.3fcd	38.8fcd	17.3fcd	9.7fcd	6.2fcd	4.3fcd	3.2fcd	2.4fcd	1.9fcd	1.6fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1671	1652	1592	1498	1376	1236	1085	931	780	637	510	399	307	234	179	138	109	88	73	62
100%	99%	95%	90%	82%	74%	65%	56%	47%	38%	30%	24%	18%	14%	11%	8%	7%	5%	4%	4%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1671	1666	1648	1619	1584	1540	1492	1440	1382	1320	1251	1174	1091	1002	909	814	720	627	538	455
100%	100%	99%	97%	95%	92%	89%	86%	83%	79%	75%	70%	65%	60%	54%	49%	43%	38%	32%	27%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1671	1652	1592	1498	1376	1236	1085	931	780	637	510	399	307	234	179	138	109	88	73	62
100%	99%	95%	90%	82%	74%	65%	56%	47%	38%	30%	24%	18%	14%	11%	8%	7%	5%	4%	4%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1671	1666	1648	1619	1584	1540	1492	1440	1382	1320	1251	1174	1091	1002	909	814	720	627	538	455
100%	100%	99%	97%	95%	92%	89%	86%	83%	79%	75%	70%	65%	60%	54%	49%	43%	38%	32%	27%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
41.5°	73.4°	105°	90.8%	84.4%